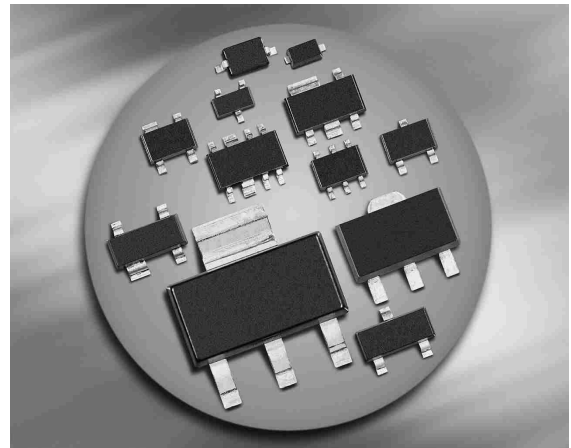







Silicon Schottky Diode

- Low barrier diode for detectors up to GHz frequencies


BAT62

**BAT62-02L
BAT62-02W
BAT62-03W**

**BAT62-07W
BAT62-07L4**

BAT62-08S

BAT62-09S


ESD: Electrostatic discharge sensitive device, observe handling precaution!

Type	Package	Configuration	L_S (nH)	Marking
BAT62	SOT143	anti-parallel pair	2	62s
BAT62-02L*	TSLP-2-1	single, leadless	0.4	L
BAT62-02W	SCD80	single	0.6	62
BAT62-03W	SOD323	single	1.8	L
BAT62-07L4*	TSLP-4-4	parallel pair, leadless	0.4	62
BAT62-07W	SOT343	parallel pair	1.8	62s
BAT62-08S	SOT363	parallel triple	1.6	62s
BAT62-09S*	SOT363	parallel pair, high isolation	1.6	69s

*Preliminary Data

Maximum Ratings at $T_A = 25^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Value	Unit
Diode reverse voltage	V_R	40	V
Forward current	I_F	20	mA
Total power dissipation	P_{tot}		mW
BAT62, $T_S \leq 85^\circ\text{C}$		100	
BAT62-02L, -07L4, -03W, $T_S \leq 108^\circ\text{C}$		100	
BAT62-02W, $T_S \leq 109^\circ\text{C}$		100	
BAT62-07W, $T_S \leq 103^\circ\text{C}$		100	
BAT62-08S, -09S, $T_S \leq 105^\circ\text{C}$		100	
Junction temperature	T_j	150	$^\circ\text{C}$
Storage temperature	T_{stg}	-55 ... 150	

Thermal Resistance

Parameter	Symbol	Value	Unit
Junction - soldering point ¹⁾	R_{thJS}		K/W
BAT62		≤ 650	
BAT62-02L, -07L4, -03W		≤ 420	
BAT62-02W		≤ 410	
BAT62-07W		≤ 470	
BAT62-08S		≤ 450	
BAT62-09S		$\leq \text{tdb}$	

Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
DC Characteristics					
Reverse current $V_R = 40\text{ V}$	I_R	-	-	10	μA
Forward voltage $I_F = 2\text{ mA}$	V_F	-	0.58	1	V
Forward voltage matching ²⁾ $I_F = 2\text{ mA}$	ΔV_F	-	-	20	mV

¹For calculation of R_{thJA} please refer to Application Note Thermal Resistance


² ΔV_F is the difference between lowest and highest V_F in a multiple diode component.

Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
AC Characteristics					
Diode capacitance $V_R = 0\text{ V}, f = 1\text{ MHz}$	C_T	-	0.35	0.6	pF
Differential resistance $V_R = 0\text{ V}, f = 10\text{ kHz}$	R_0	-	225	-	k Ω


Diode capacitance $C_T = f(V_R)$

$f = 1\text{MHz}$

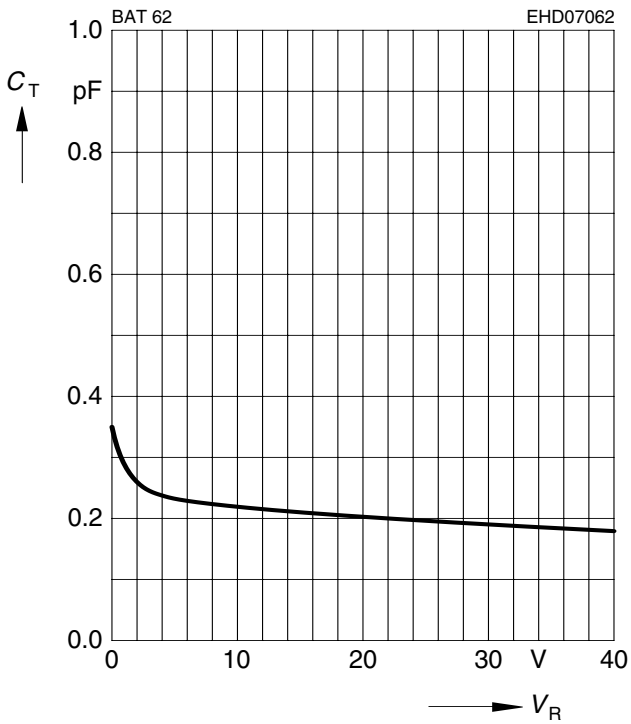


Reverse current $I_R = f(V_R)$

$T_A = \text{Parameter}$

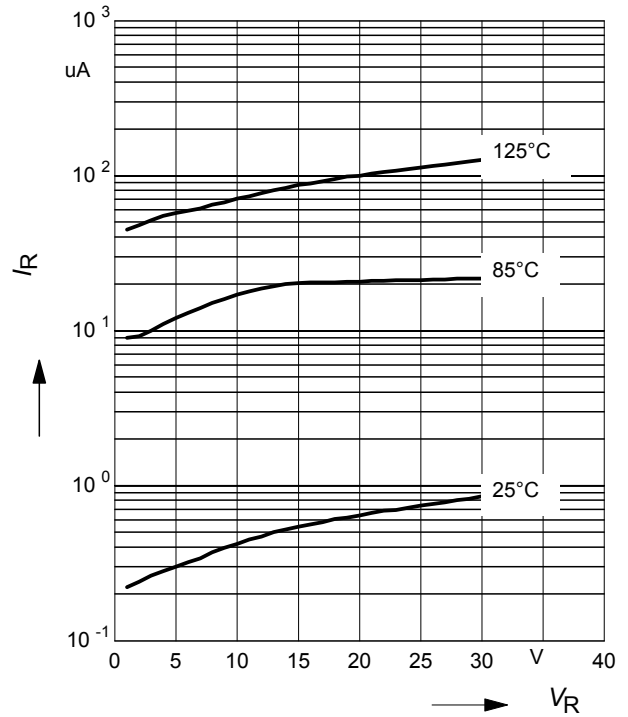


Forward current $I_F = f(V_F)$

$T_A = \text{Parameter}$

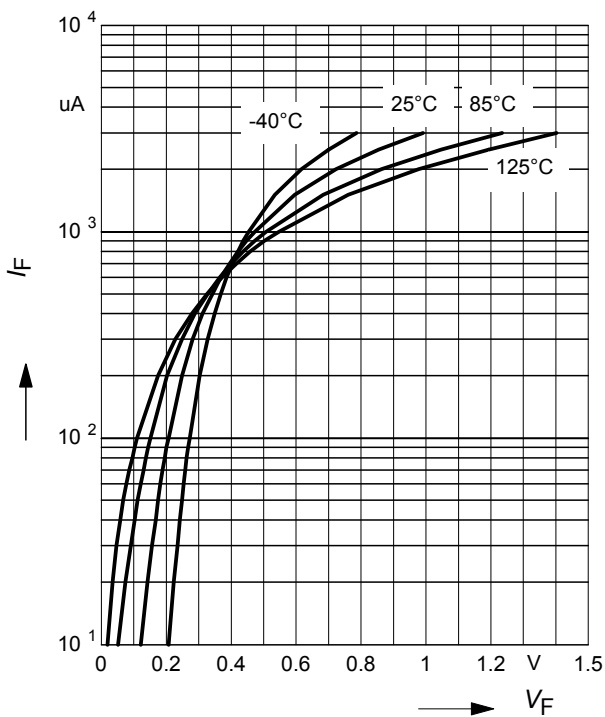


Forward current $I_F = f(T_S)$

BAT62

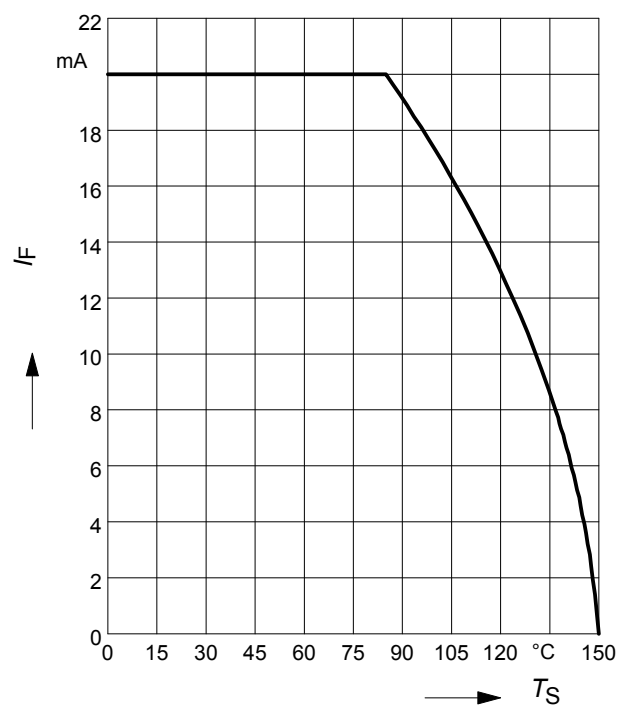


Forward current $I_F = f(T_S)$

BAT62-02L, -07L4

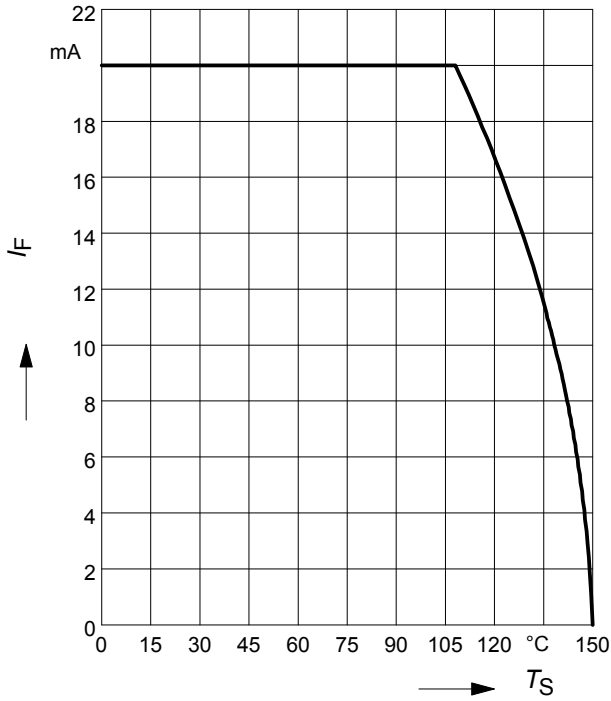


Forward current $I_F = f(T_S)$

BAT62-02W

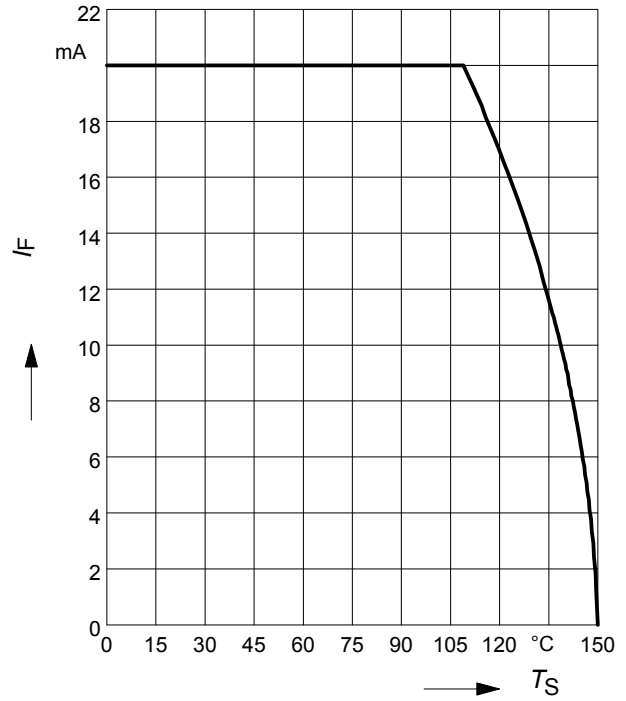


Forward current $I_F = f(T_S)$

BAT62-03W

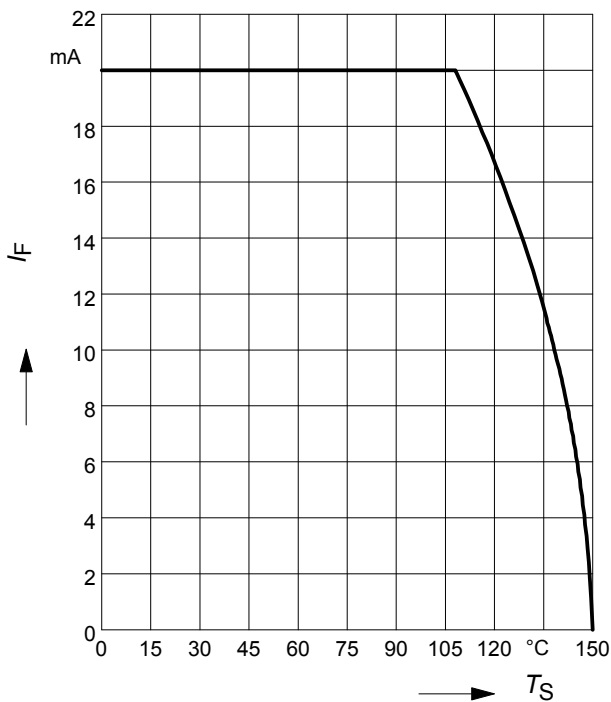


Forward current $I_F = f(T_S)$

BAT62-07W

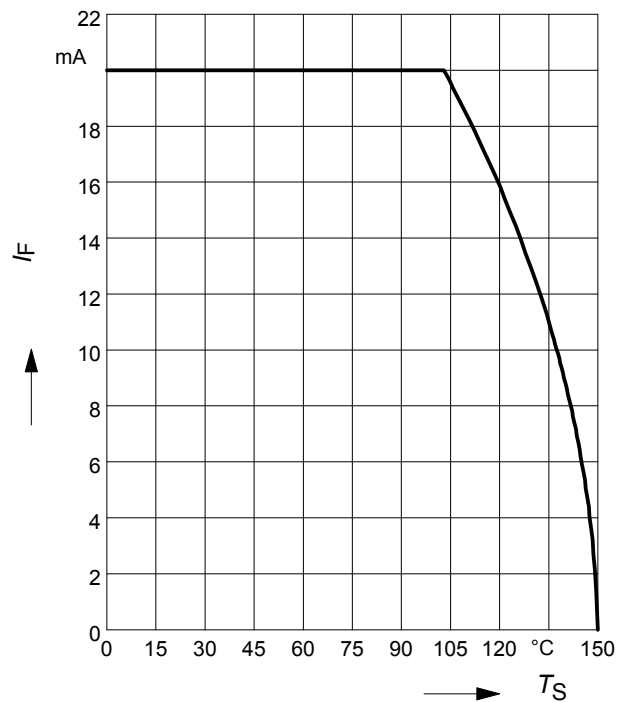


Forward current $I_F = f(T_S)$

BAT62-08S

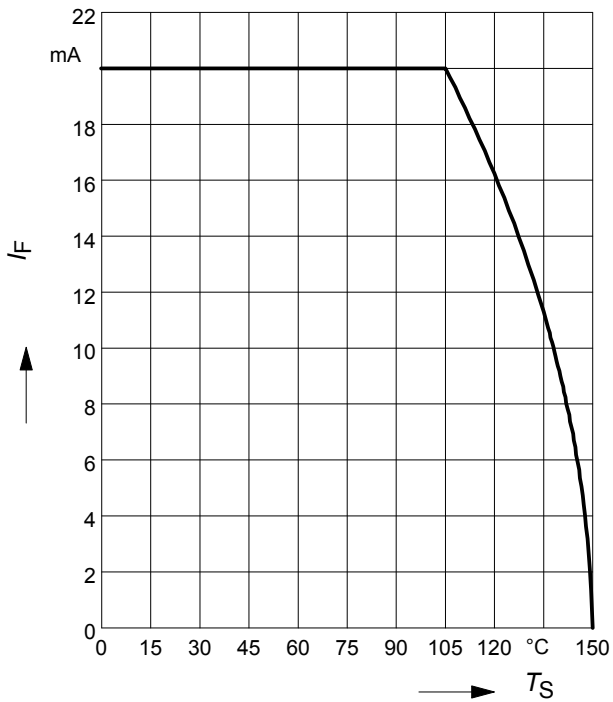

Permissible Puls Load $R_{thJS} = f(t_p)$


BAT62

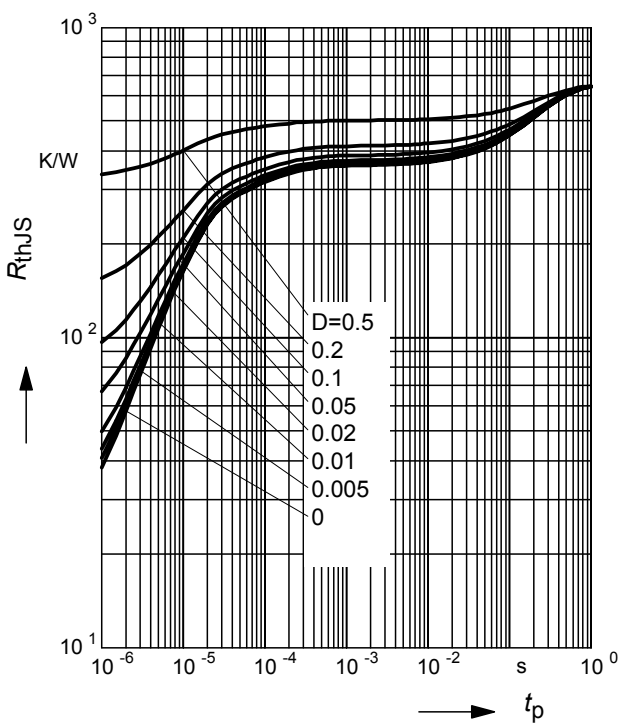

Permissible Pulse Load


$I_{Fmax} / I_{FDC} = f(t_p)$

BAT62

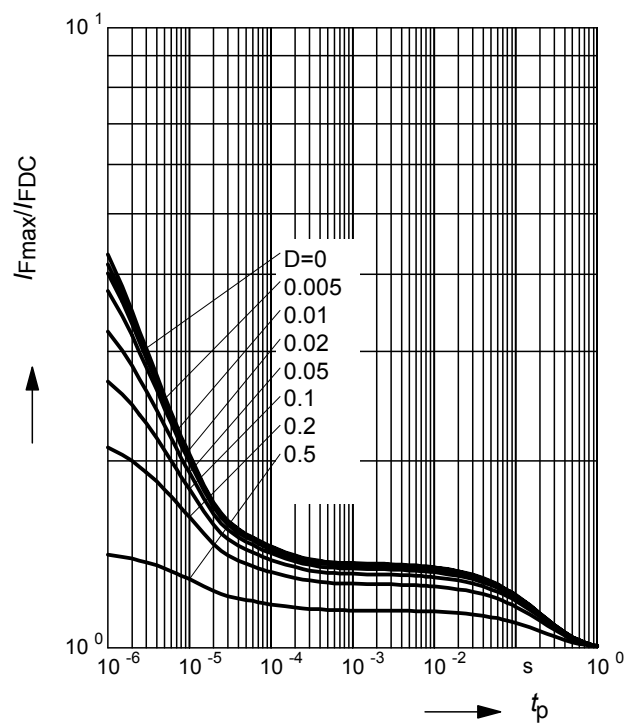

Permissible Puls Load $R_{thJS} = f(t_p)$


BAT62-02L, -07L4

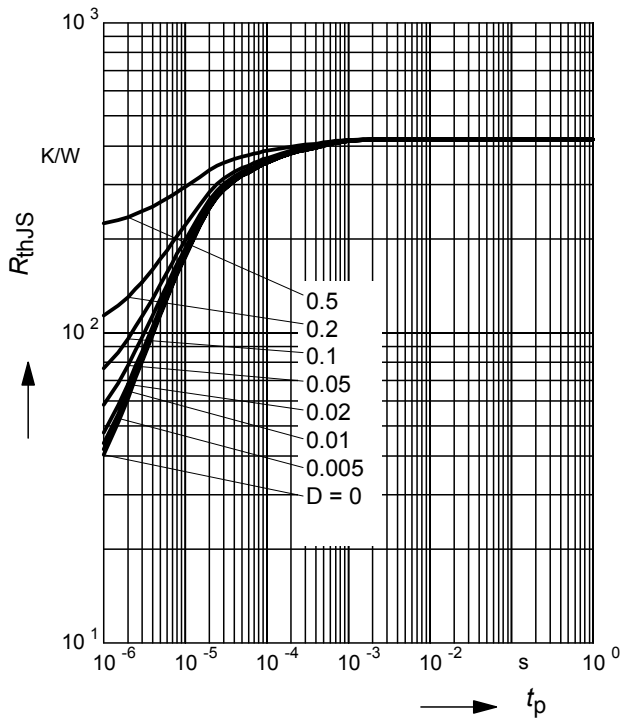

Permissible Pulse Load


$I_{Fmax} / I_{FDC} = f(t_p)$

BAT62-02L, -07L4

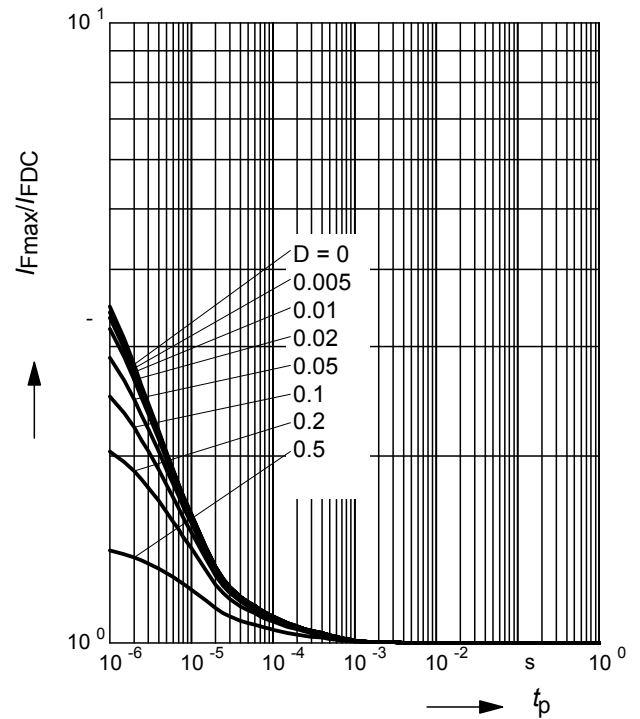

Permissible Puls Load $R_{thJS} = f(t_p)$


BAT62-02W

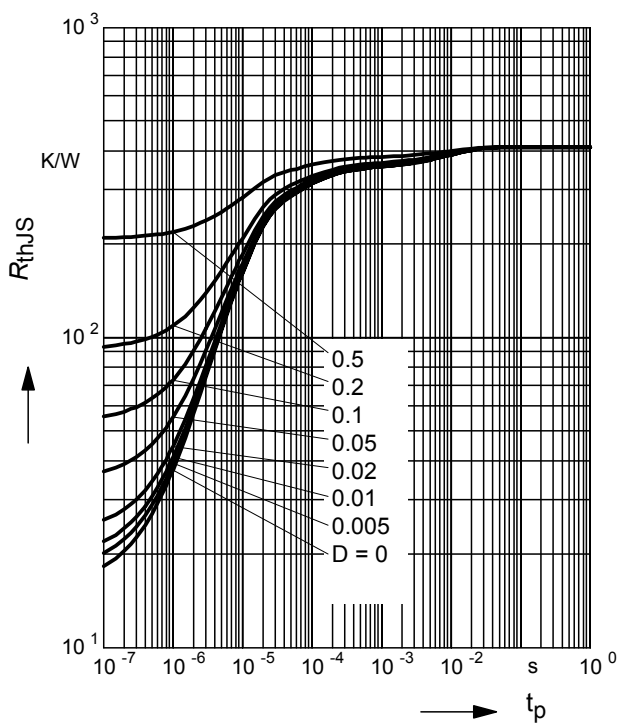

Permissible Pulse Load


$I_{Fmax} / I_{FDC} = f(t_p)$

BAT62-02W

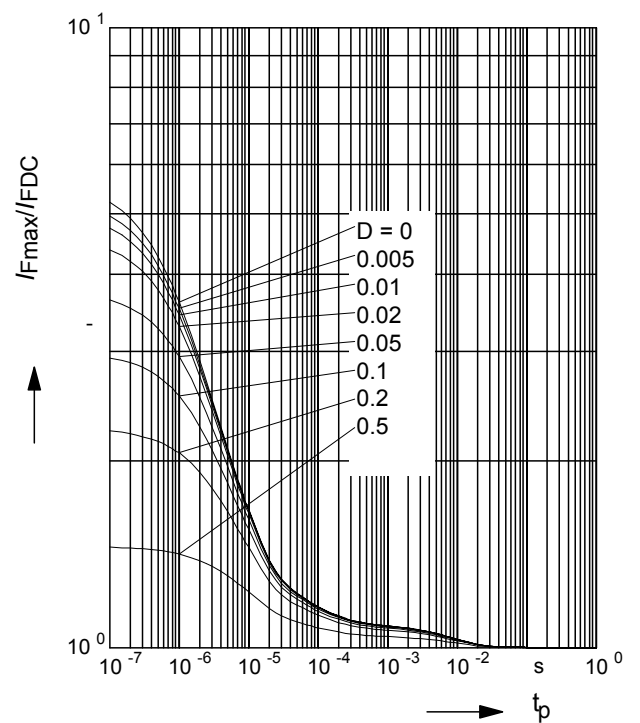

Permissible Puls Load $R_{thJS} = f(t_p)$


BAT62-03W

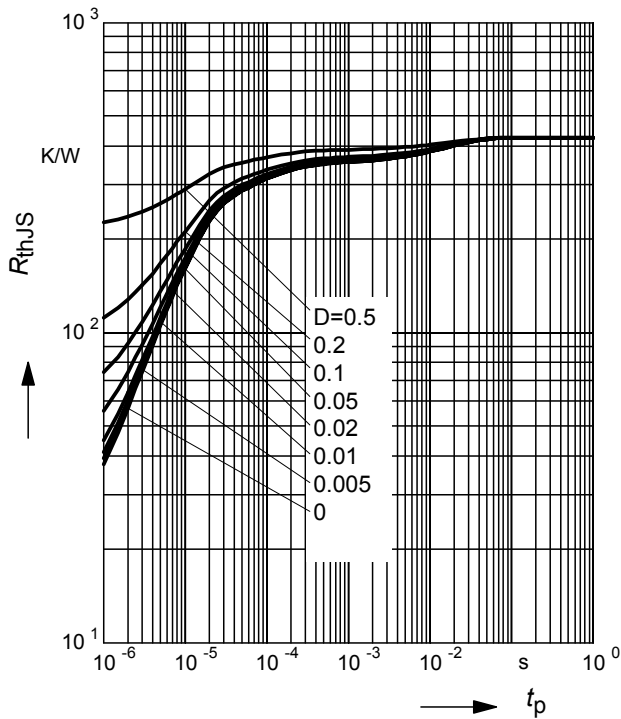

Permissible Pulse Load


$I_{Fmax} / I_{FDC} = f(t_p)$

BAT62-03W

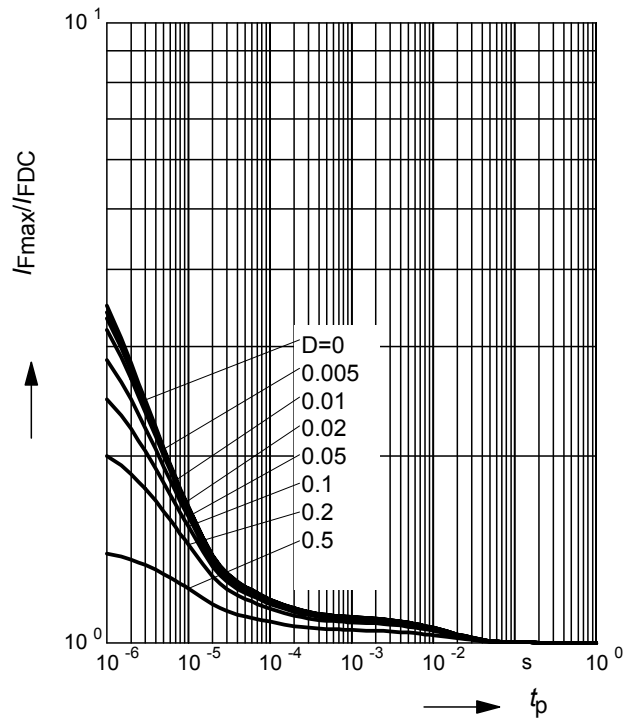

Permissible Puls Load $R_{thJS} = f(t_p)$


BAT62-07W

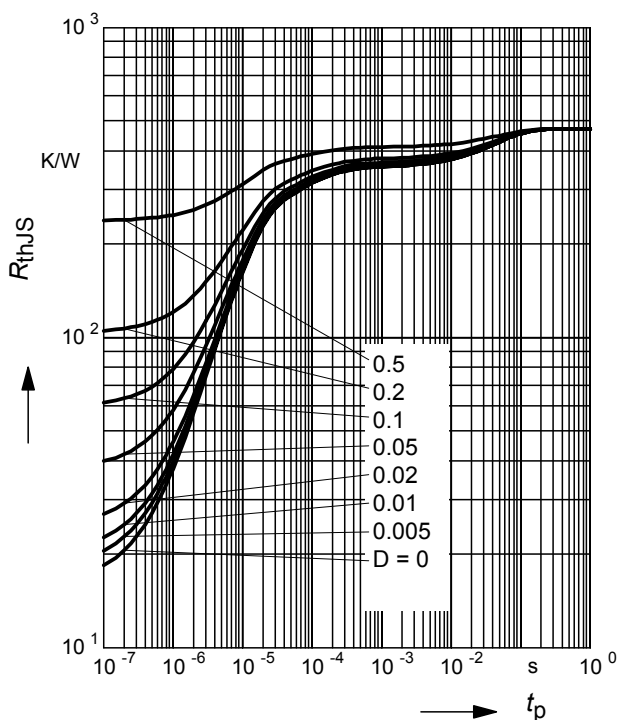

Permissible Pulse Load


$I_{Fmax} / I_{FDC} = f(t_p)$

BAT62-07W

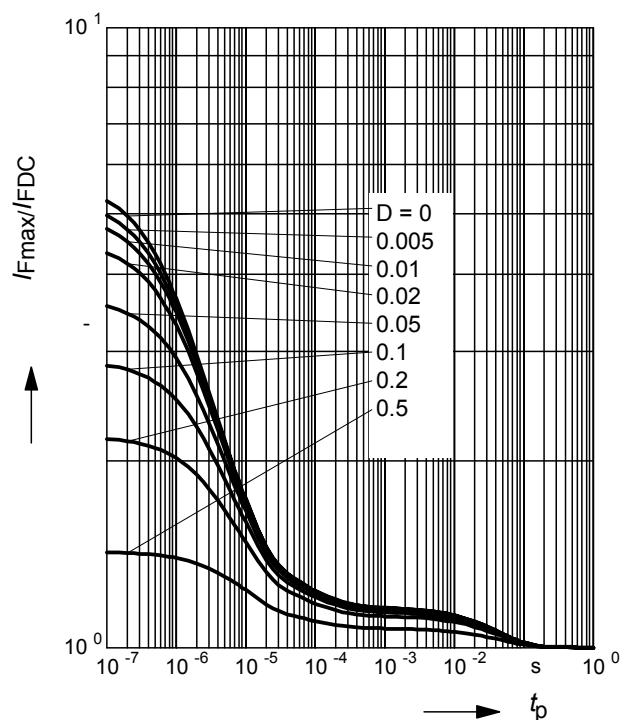

Permissible Puls Load $R_{thJS} = f(t_p)$


BAT62-08S

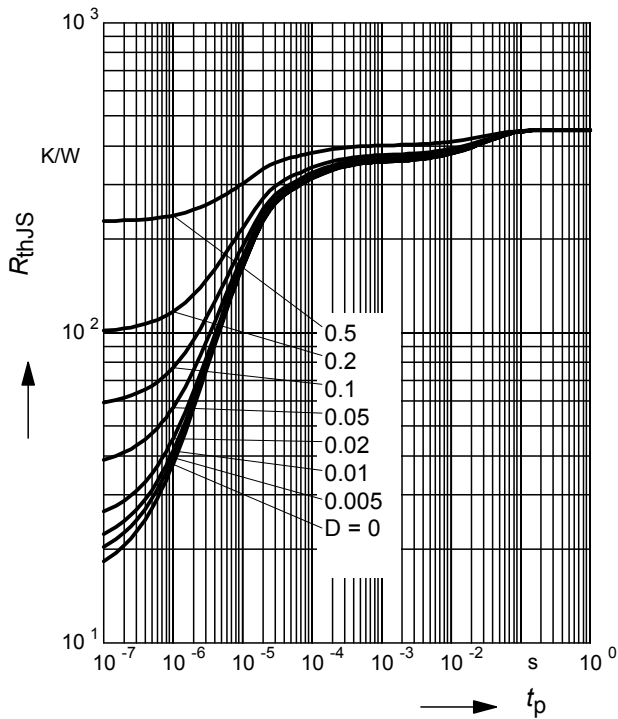

Permissible Pulse Load

$I_{Fmax} / I_{FDC} = f(t_p)$


BAT62-08S

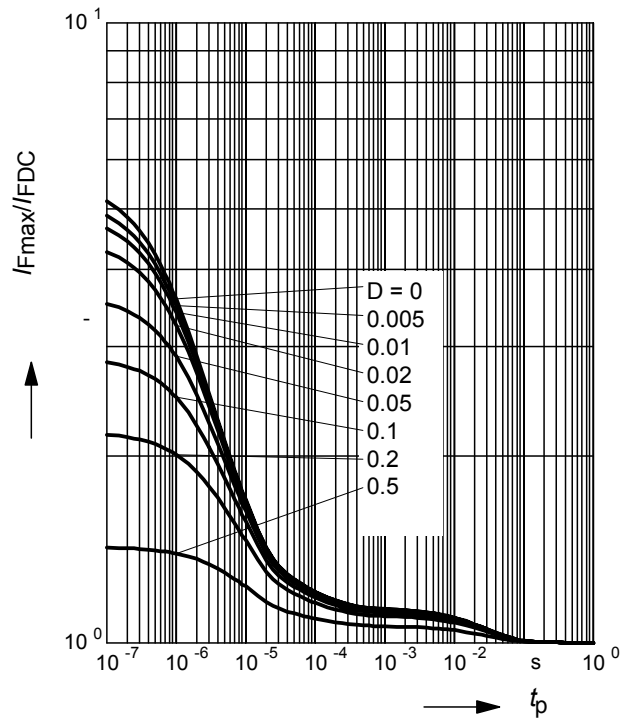


Rectifier voltage $V_{out} = f(V_{in})$

$f = 900\text{MHz}$

$R_L = \text{Parameter in } k\Omega$

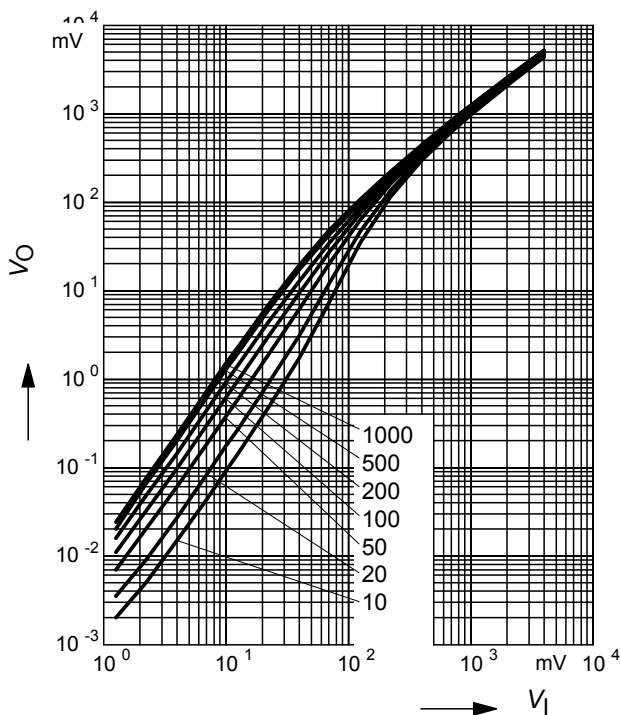

Testcircuit

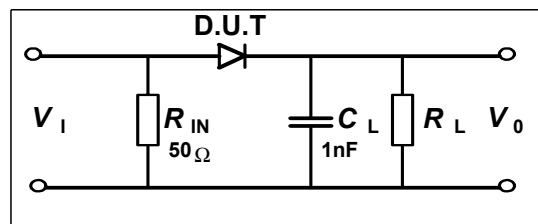



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.