


**Silicon Tuning Diode**

- For VHF 2-Band-hyperband-TV-tuners
- Very high capacitance ratio
- Low series resistance
- Extremely small plastic SMD package
- Excellent uniformity and matching due to "in-line" matching assembly procedure

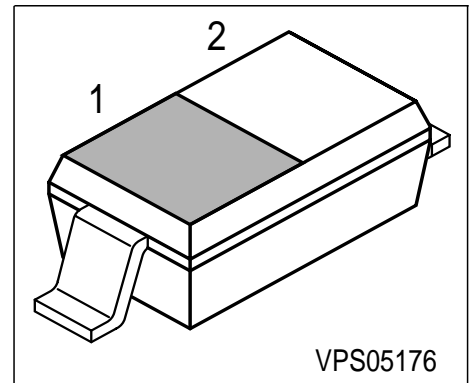

Type	Marking	Pin Configuration		Package
BB669	1	1 = C	2 = A	SOD323

**Maximum Ratings**

Parameter	Symbol	Value	Unit
Diode reverse voltage	$V_R$	30	V
Peak reverse voltage ( $R \geq 5k\Omega$ )	$V_{RM}$	35	
Forward current	$I_F$	20	mA
Operating temperature range	$T_{op}$	-55... 150	°C
Storage temperature	$T_{stg}$	-55... 150	


**Electrical Characteristics** at  $T_A = 25^\circ\text{C}$ , unless otherwise specified.

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
<b>DC characteristics</b>					
Reverse current $V_R = 30\text{ V}$	$I_R$	-	-	10	nA
Reverse current $V_R = 30\text{ V}, T_A = 85^\circ\text{C}$	$I_R$	-	-	200	
<b>AC characteristics</b>					
Diode capacitance $V_R = 1\text{ V}, f = 1\text{ MHz}$ $V_R = 2\text{ V}, f = 1\text{ MHz}$ $V_R = 25\text{ V}, f = 1\text{ MHz}$ $V_R = 28\text{ V}, f = 1\text{ MHz}$	$C_T$	51 39.6 2.6 2.5	56.5 43.4 2.8 2.7	61.5 47.2 3 2.9	pF
Capacitance ratio $V_R = 2\text{ V}, V_R = 25\text{ V}, f = 1\text{ MHz}$	$C_{T2}/C_{T25}$	14.5	15.5	17	-
Capacitance ratio $V_R = 1\text{ V}, V_R = 28\text{ V}, f = 1\text{ MHz}$	$C_{T1}/C_{T28}$	18	20.9	23.3	
Capacitance ratio <sup>1)</sup> $V_R = 1\text{ V}, V_R = 28\text{ V}, f = 1\text{ MHz}$	$\Delta C_T/C_T$	-	-	2	%
Series resistance $V_R = 8\text{ V}, f = 470\text{ MHz}$	$r_s$	-	0.85	-	$\Omega$
Series inductance	$L_s$	-	1.8	-	nH

1) In-line matching. For details please refer to Application Note 047


**Diode capacitance  $C_T = f(V_R)$**

$f = 1\text{MHz}$

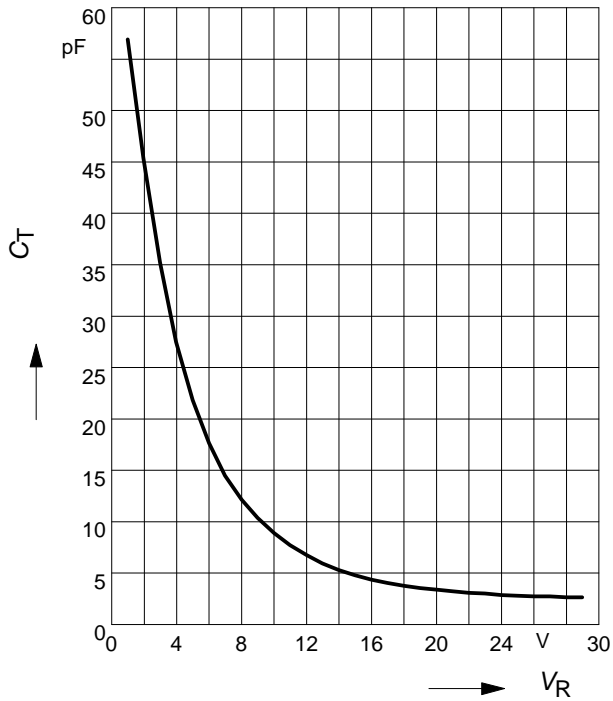


**Reverse current  $I_R = f(V_R)$**

$T_A = \text{Parameter}$

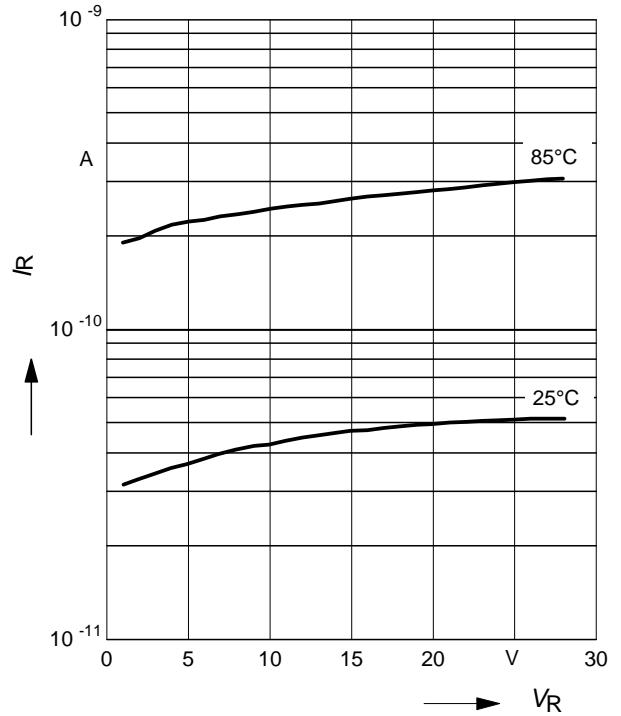

**Temperature coefficient of the diode capacitance  $T_{Cc} = f(V_R)$**

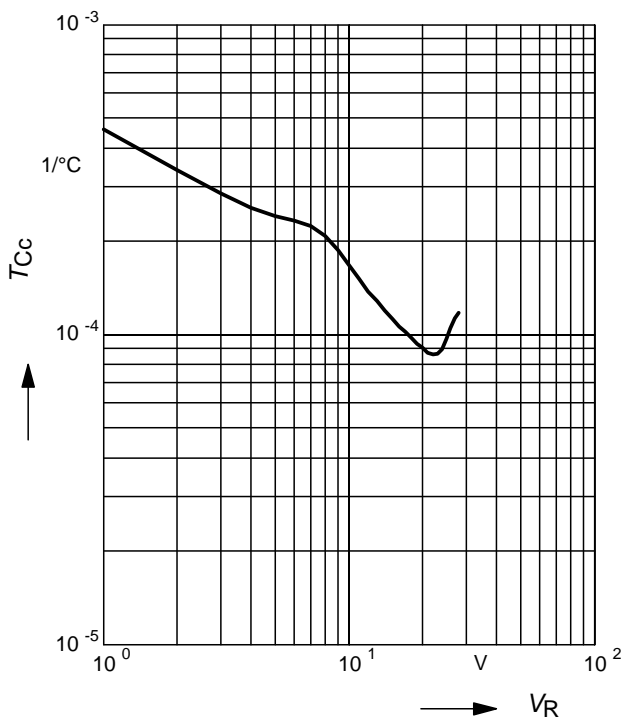



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.