NPN Silicon Digital Transistor

- Switching circuit, inverter, interface circuit driver circuit
- Built in bias resistor (R_1=10kΩ, R_2=47kΩ)
- For 6-PIN packages: two (galvanic) internal isolated transistors with good matching in one package

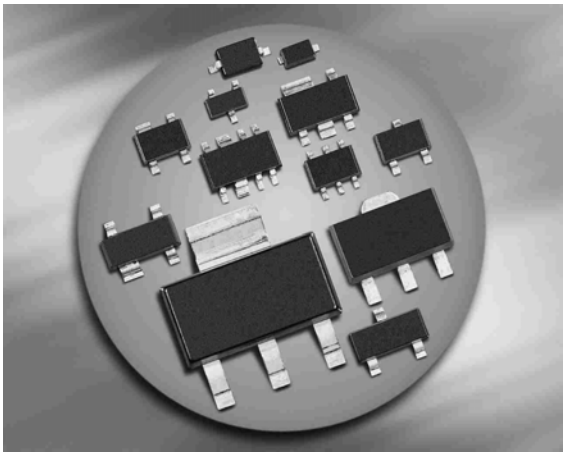

BCR135/F/L3 BCR135S
BCR135T/W





Type	Marking	Pin Configuration						Package
BCR135	WJs	1=B	2=E	3=C	-	-	-	SOT23
BCR135F	WJs	1=B	2=E	3=C	-	-	-	TSFP-3
BCR135L3	WJ	1=B	2=E	3=C	-	-	-	TSLP-3-4
BCR135S	WJs	1=E1	2=B1	3=C2	4=E2	5=B2	6=C1	SOT363
BCR135T	WJs	1=B	2=E	3=C	-	-	-	SC75
BCR135W	WJs	1=B	2=E	3=C	-	-	-	SOT323

Maximum Ratings

Parameter	Symbol	Value	Unit
Collector-emitter voltage	V_{CEO}	50	V
Collector-base voltage	V_{CBO}	50	
Emitter-base voltage	V_{EBO}	6	
Input on voltage	$V_{i(on)}$	20	
Collector current	I_C	100	mA
Total power dissipation-	P_{tot}		mW
BCR135, $T_S \leq 102°C$		200	
BCR135F, $T_S \leq 128°C$		250	
BCR135L3, $T_S \leq 135°C$		250	
BCR135S, $T_S \leq 115°C$		250	
BCR135T, $T_S \leq 109°C$		250	
BCR135W, $T_S \leq 124°C$		250	
Junction temperature	T_j	150	°C
Storage temperature	T_{stg}	-65 ... 150	

Thermal Resistance

Parameter	Symbol	Value	Unit
Junction - soldering point[1)]	R_{thJS}		K/W
BCR135		≤ 240	
BCR135F		≤ 90	
BCR135L3		≤ 60	
BCR135S		≤ 140	
BCR135T		≤ 165	
BCR135W		≤ 105	

[1]For calculation of R_{thJA} please refer to Application Note Thermal Resistance

Electrical Characteristics at T_A = 25°C, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
DC Characteristics					
Collector-emitter breakdown voltage I_C = 100 µA, I_B = 0	$V_{(BR)CEO}$	50	-	-	V
Collector-base breakdown voltage I_C = 10 µA, I_E = 0	$V_{(BR)CBO}$	50	-	-	
Collector-base cutoff current V_{CB} = 40 V, I_E = 0	I_{CBO}	-	-	100	nA
Emitter-base cutoff current V_{EB} = 6 V, I_C = 0	I_{EBO}	-	-	167	µA
DC current gain[1)] I_C = 5 mA, V_{CE} = 5 V	h_{FE}	70	-	-	-
Collector-emitter saturation voltage[1)] I_C = 10 mA, I_B = 0.5 mA	V_{CEsat}	-	-	0.3	V
Input off voltage I_C = 100 µA, V_{CE} = 5 V	$V_{i(off)}$	0.5	-	1	
Input on voltage I_C = 2 mA, V_{CE} = 0.3 V	$V_{i(on)}$	0.5	-	1.4	
Input resistor	R_1	7	10	13	kΩ
Resistor ratio	R_1/R_2	0.19	0.21	0.24	-
AC Characteristics					
Transition frequency I_C = 10 mA, V_{CE} = 5 V, f = 100 MHz	f_T	-	150	-	MHz
Collector-base capacitance V_{CB} = 10 V, f = 1 MHz	C_{cb}	-	3	-	pF

[1]Pulse test: t < 300µs; D < 2%

DC current gain $h_{FE} = f(I_C)$

V_{CE} = 5V (common emitter configuration)

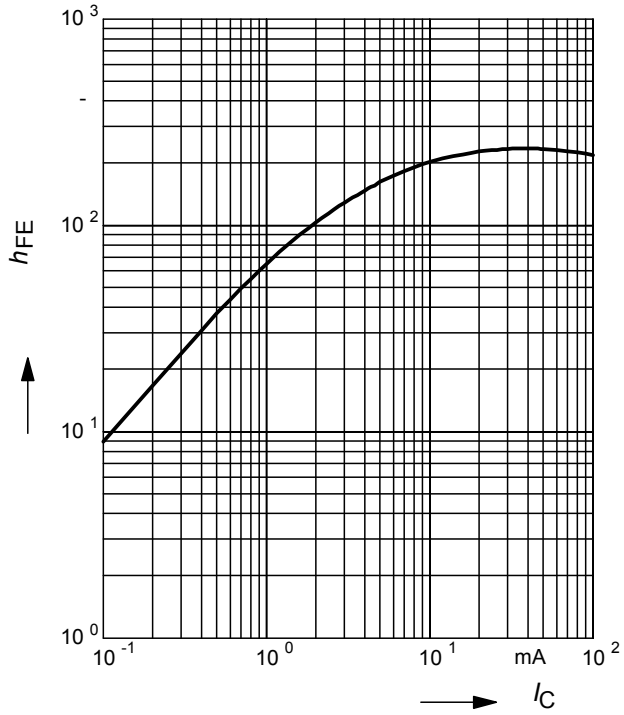

Collector-emitter saturation voltage

$V_{CEsat} = f(I_C)$, h_{FE} = 20

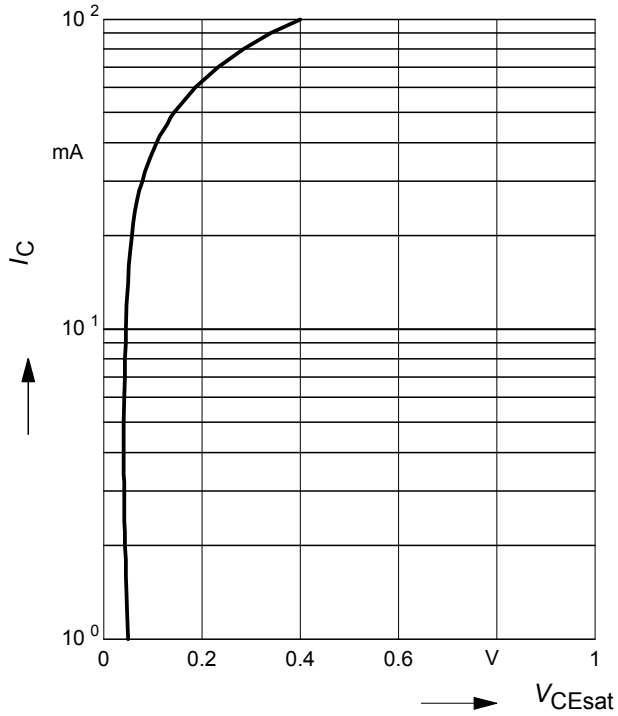

Input on Voltage $V_{i(on)} = f(I_C)$

V_{CE} = 0.3V (common emitter configuration)

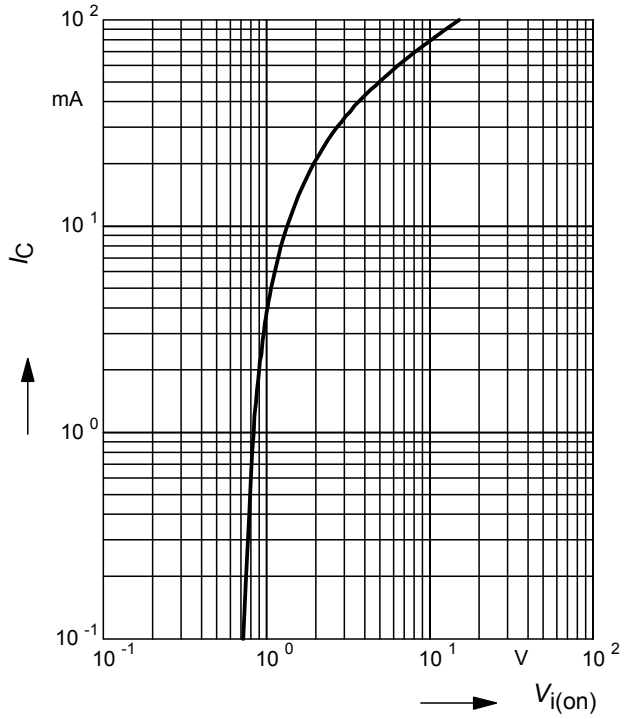

Input off voltage $V_{i(off)} = f(I_C)$

V_{CE} = 5V (common emitter configuration)

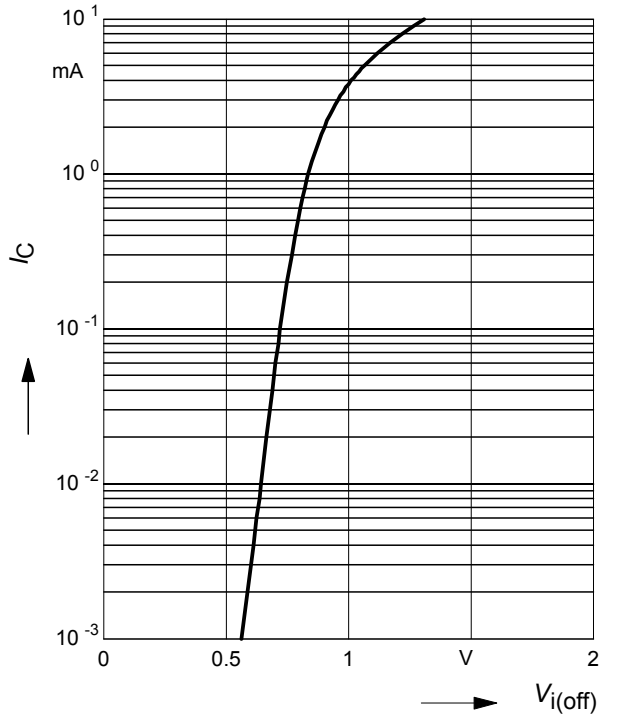

Total power dissipation $P_{tot} = f(T_S)$
BCR135

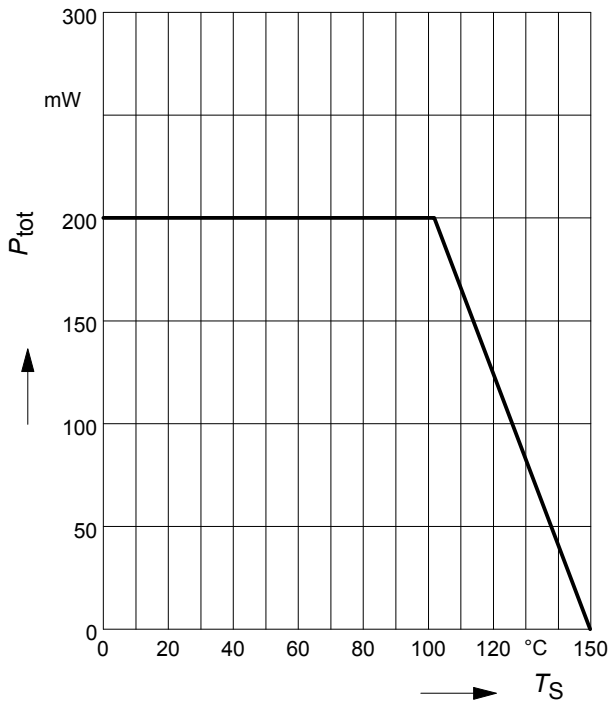

Total power dissipation $P_{tot} = f(T_S)$
BCR135F

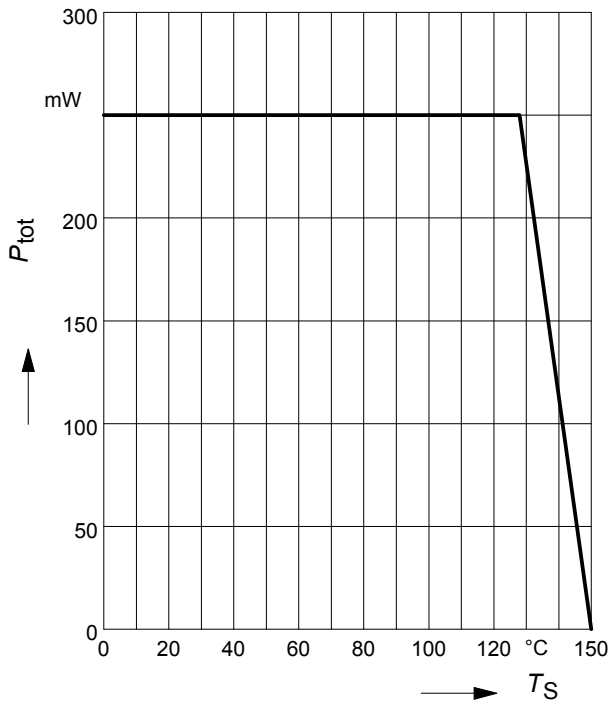

Total power dissipation $P_{tot} = f(T_S)$
BCR135L3

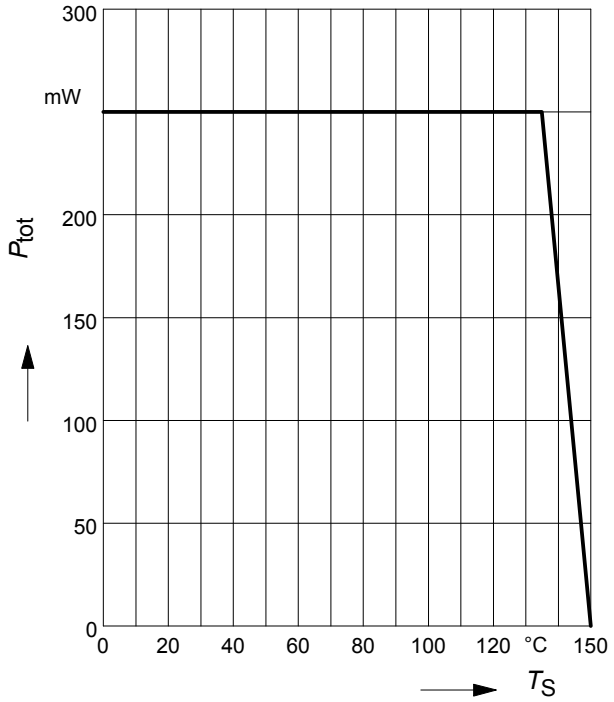

Total power dissipation $P_{tot} = f(T_S)$
BCR135S

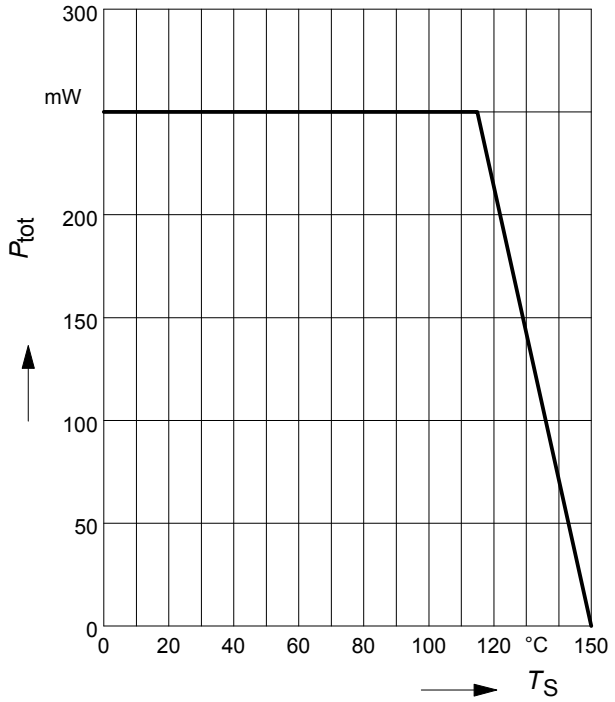

Total power dissipation $P_{tot} = f(T_S)$
BCR135T

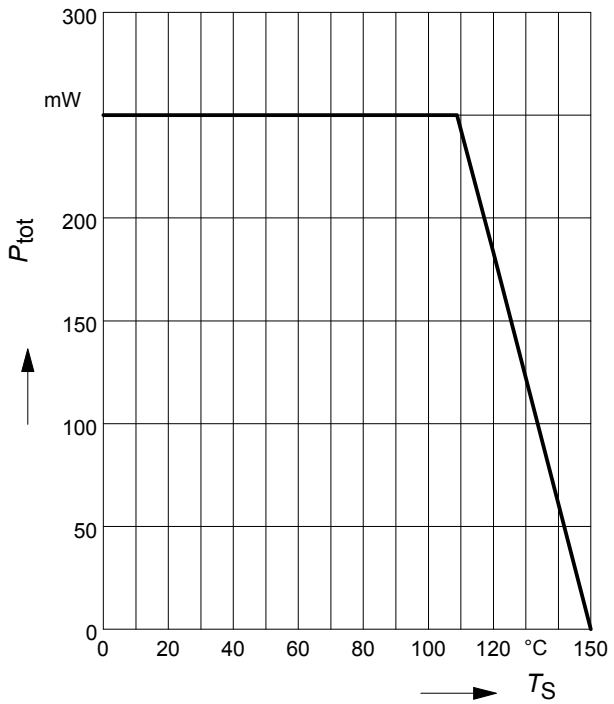

Total power dissipation $P_{tot} = f(T_S)$
BCR135W

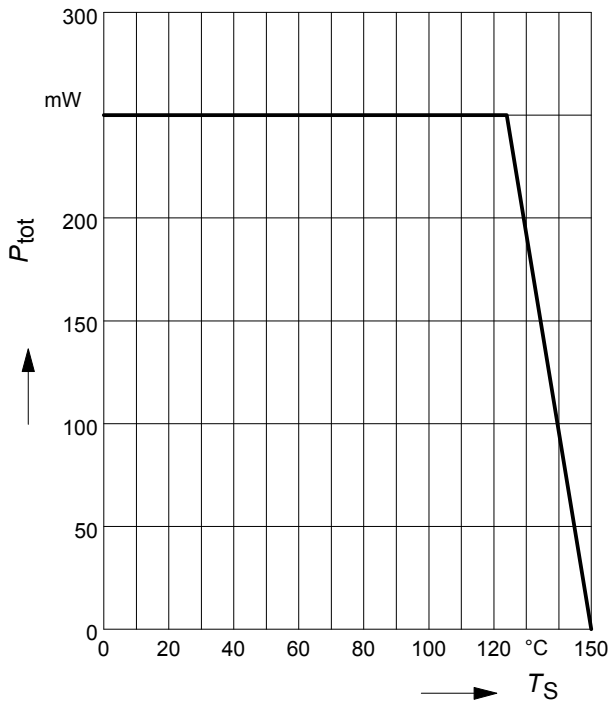

Permissible Pulse Load $R_{thJS} = f(t_p)$
BCR135

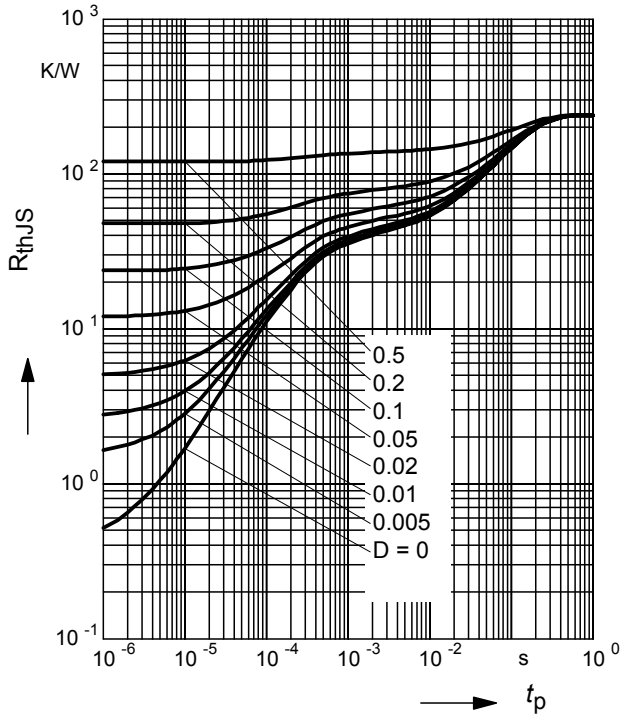

Permissible Pulse Load
$P_{totmax}/P_{totDC} = f(t_p)$
BCR135

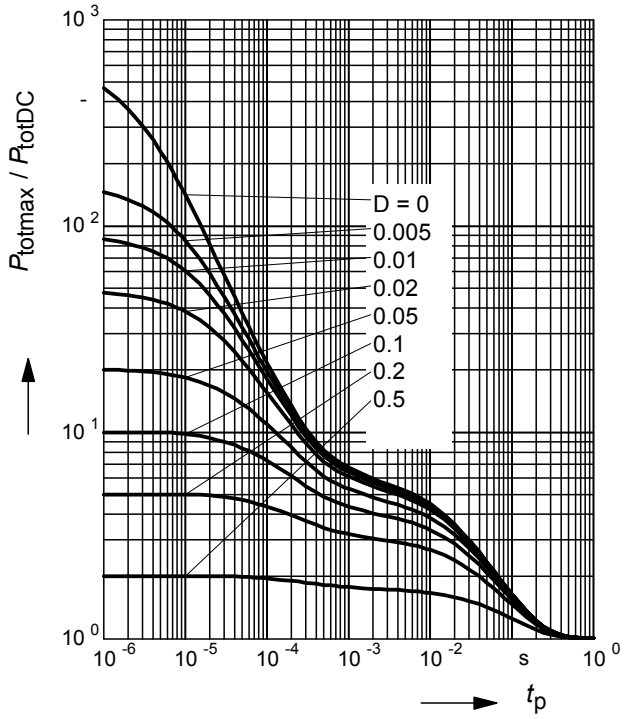

Permissible Puls Load $R_{thJS} = f(t_p)$

BCR135F

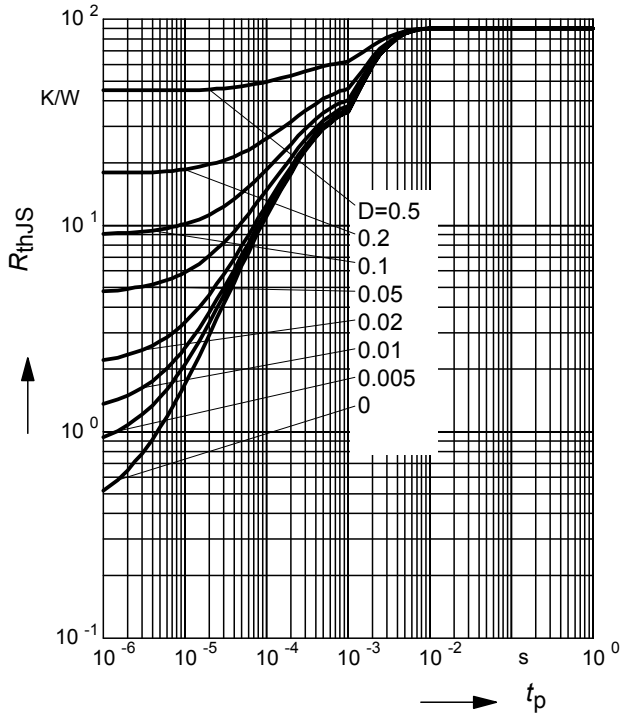

Permissible Pulse Load

$P_{totmax}/P_{totDC} = f(t_p)$

BCR135F

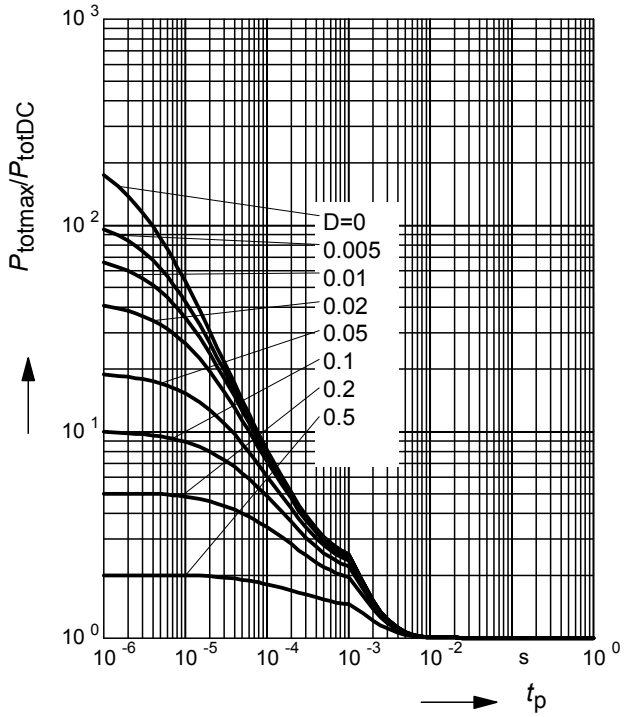

Permissible Puls Load $R_{thJS} = f(t_p)$

BCR135L3

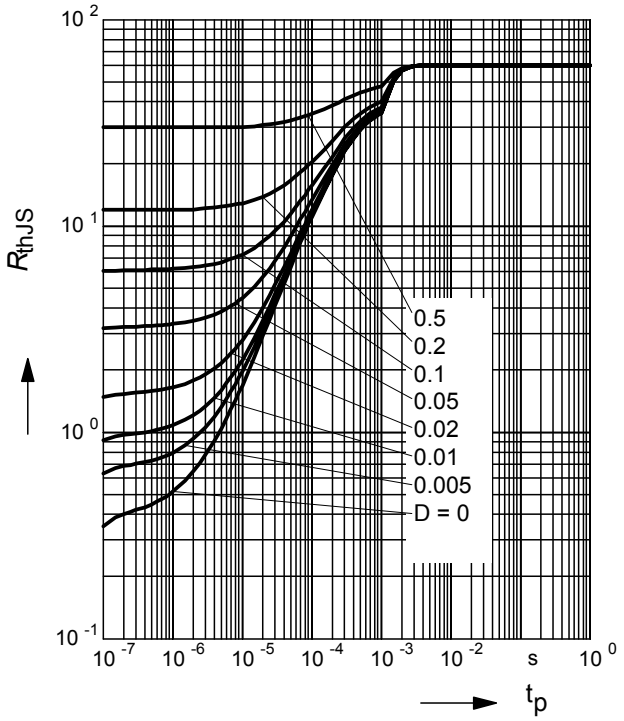

Permissible Pulse Load

$P_{totmax}/P_{totDC} = f(t_p)$

BCR135L3

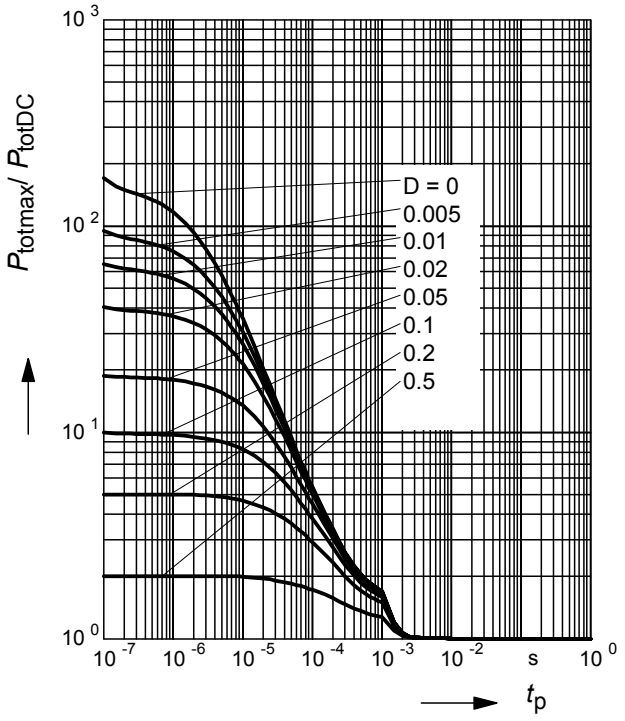

Permissible Puls Load $R_{thJS} = f(t_p)$

BCR135S

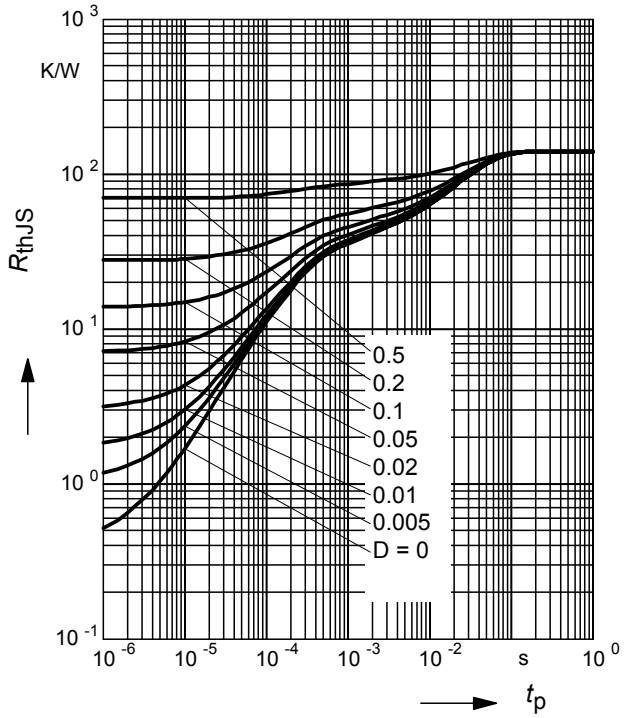

Permissible Pulse Load

$P_{totmax}/P_{totDC} = f(t_p)$

BCR135S

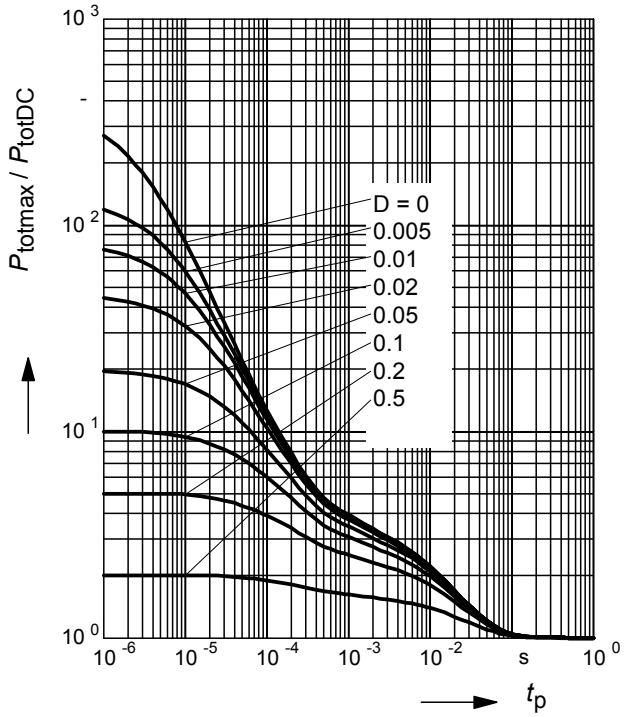

Permissible Puls Load $R_{thJS} = f(t_p)$

BCR135T

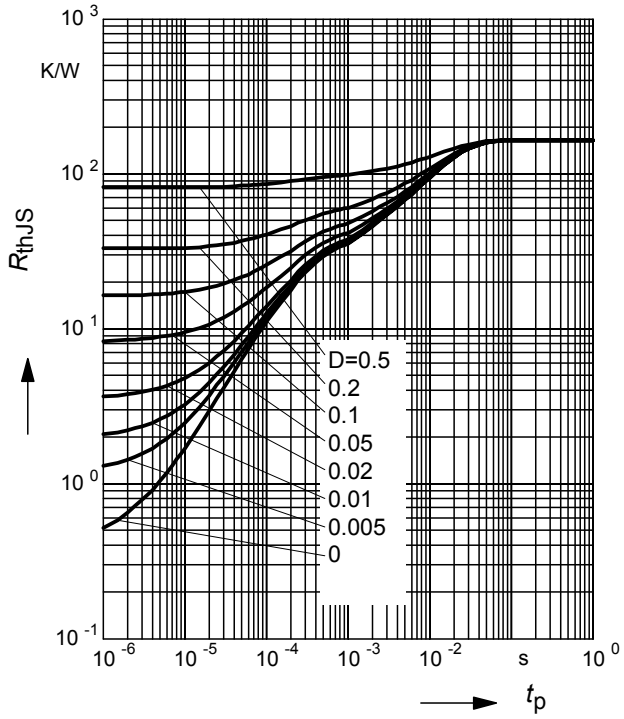

Permissible Pulse Load

$P_{totmax}/P_{totDC} = f(t_p)$

BCR135T

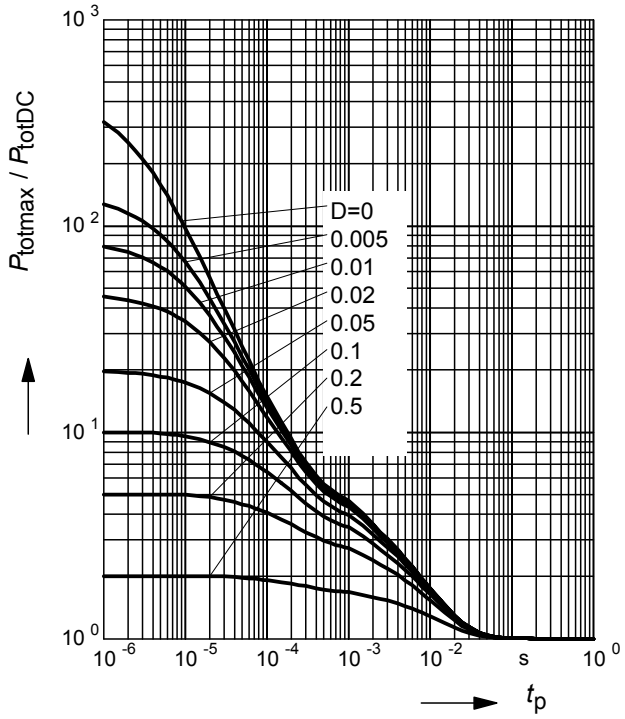

Permissible Puls Load $R_{thJS} = f(t_p)$

BCR135W

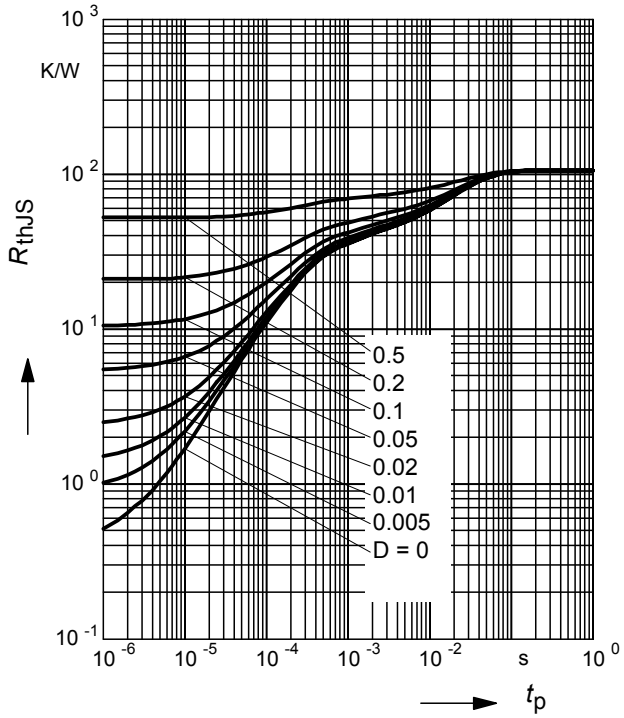

Permissible Pulse Load

$P_{totmax}/P_{totDC} = f(t_p)$

BCR135W

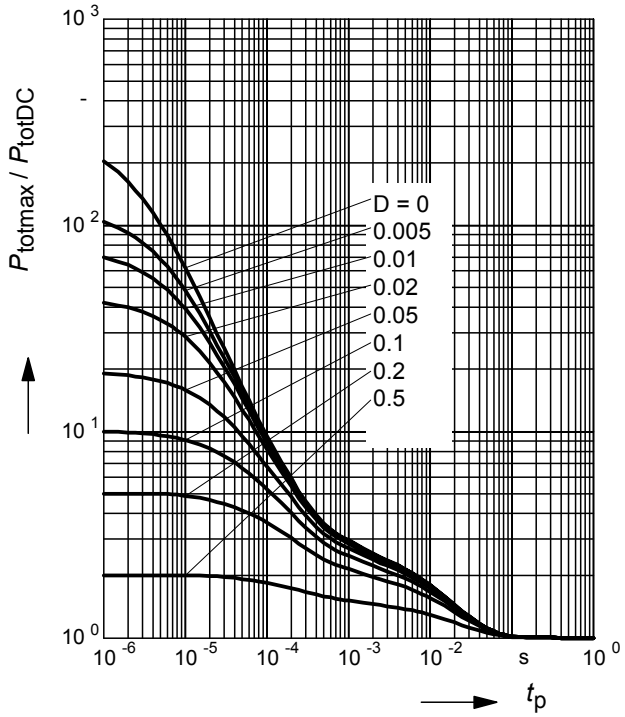

Littlediode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.