


1 - Cathode
2 - N/C
3 - Anode



**ADVANCED
POWER
TECHNOLOGY®**
APT30DS60H 600V 30A

2-300V HIGH FREQUENCY SOFT RECOVERY RECTIFIER DIODES IN SERIES

PRODUCT APPLICATIONS	PRODUCT FEATURES	PRODUCT BENEFITS
<ul style="list-style-type: none"> • Anti-Parallel Diode <ul style="list-style-type: none"> -Switchmode Power Supply -Inverters • Free Wheeling Diode <ul style="list-style-type: none"> -Motor Controllers -Converters • Snubber Diode • Uninterruptible Power Supply (UPS) • Induction Heating • High Speed Rectifiers 	<ul style="list-style-type: none"> • Ultrafast Recovery Times • Soft Recovery Characteristics • Hermetic TO-258 Package • $t_{rr} < 25\text{ns}$ @ 30 Amps • High Blocking Voltage • Low Leakage Current 	<ul style="list-style-type: none"> • Low Losses • Low Noise Switching • Cooler Operation • Higher Reliability Systems • Increased System Power Density

MAXIMUM RATINGS

All Ratings: $T_C = 25^\circ\text{C}$ unless otherwise specified.

Symbol	Characteristic / Test Conditions	APT30DS60H	UNIT
V_R	Maximum D.C. Reverse Voltage	600	Volts
V_{RRM}	Maximum Peak Repetitive Reverse Voltage		
V_{RWM}	Maximum Working Peak Reverse Voltage		
$I_F(AV)$	Maximum Average Forward Current ($T_C = 105^\circ\text{C}$, Duty Cycle = 0.5)	30	Amps
$I_F(RMS)$	RMS Forward Current	70	
I_{FSM}	Non-Repetitive Forward Surge Current ($T_J = 45^\circ\text{C}$, 8.3ms)	320	
T_J, T_{STG}	Operating and Storage Temperature Range	-55 to 150	$^\circ\text{C}$
T_L	Lead Temperature: 0.063" from Case for 10 Sec.	300	

STATIC ELECTRICAL CHARACTERISTICS

Symbol	Characteristic / Test Conditions	MIN	TYP	MAX	UNIT
V_F	Maximum Forward Voltage	$I_F = 30\text{A}$		4.0	Volts
		$I_F = 60\text{A}$		4.0	
		$I_F = 30\text{A}, T_J = 150^\circ\text{C}$		3.5	
I_{RM}	Maximum Reverse Leakage Current	$V_R = V_R$ Rated		250	μA
		$V_R = V_R$ Rated, $T_J = 125^\circ\text{C}$		500	
C_T	Junction Capacitance, $V_R = 150\text{V}$		35		pF
L_S	Series Inductance (Lead to Lead 5mm from Base)		10		nH

APT Website - <http://www.advancedpower.com>

USA 405 S.W. Columbia Street Bend, Oregon 97702-1035 Phone: (541) 382-8028 FAX: (541) 388-0364
EUROPE Chemin de Magret F-33700 Merignac - France Phone: (33) 5 57 92 15 15 FAX: (33) 5 56 47 97 61

DYNAMIC CHARACTERISTICS

APT30DS60H


Symbol	Characteristic	MIN	TYP	MAX	UNIT
t_{rr1}	Reverse Recovery Time, $I_F = 1.0A$, $di_F/dt = -15A/\mu s$, $V_R = 30V$, $T_J = 25^\circ C$		35	45	ns
t_{rr2}	Reverse Recovery Time	$T_J = 25^\circ C$	20		
t_{rr3}	$I_F = 30A$, $di_F/dt = -500A/\mu s$, $V_R = 350V$	$T_J = 100^\circ C$	35		
t_{fr1}	Forward Recovery Time	$T_J = 25^\circ C$	45		
t_{fr2}	$I_F = 30A$, $di_F/dt = 500A/\mu s$, $V_R = 350V$	$T_J = 100^\circ C$	50		
I_{RRM1}	Reverse Recovery Current	$T_J = 25^\circ C$	6.0	10	Amps
I_{RRM2}	$I_F = 30A$, $di_F/dt = -500A/\mu s$, $V_R = 350V$	$T_J = 100^\circ C$	11.0	15	
Q_{rr1}	Recovery Charge	$T_J = 25^\circ C$	75		nC
Q_{rr2}	$I_F = 30A$, $di_F/dt = -500A/\mu s$, $V_R = 350V$	$T_J = 100^\circ C$	220		
V_{fr1}	Forward Recovery Voltage	$T_J = 25^\circ C$	20		Volts
V_{fr2}	$I_F = 30A$, $di_F/dt = 500A/\mu s$, $V_R = 350V$	$T_J = 100^\circ C$	21		
diM/dt	Rate of Fall of Recovery Current	$T_J = 25^\circ C$	900		A/ μs
	$I_F = 30A$, $di_F/dt = -500A/\mu s$, $V_R = 350V$	$T_J = 100^\circ C$	2000		

THERMAL AND MECHANICAL CHARACTERISTICS

Symbol	Characteristic / Test Conditions	MIN	TYP	MAX	UNIT
$R_{\theta JC}$	Junction-to-Case Thermal Resistance			0.66	$^\circ C/W$
$R_{\theta JA}$	Junction-to-Ambient Thermal Resistance			40	
W_T	Package Weight		0.22		oz
			6.1		gm

APT Reserves the right to change, without notice, the specifications and information contained herein.

TO-258 Package Outline

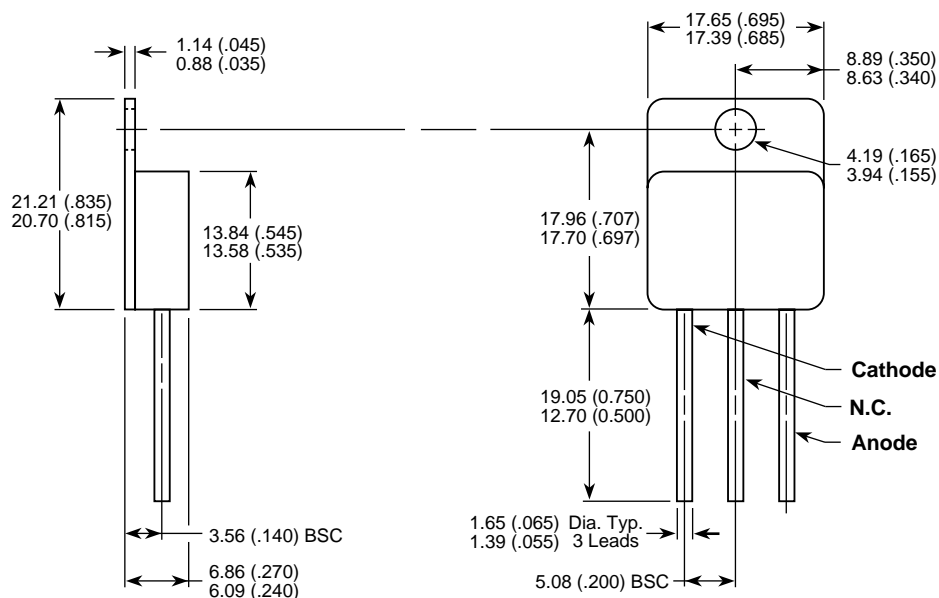

053-4029 Rev - 9-2001

APT's devices are covered by one or more of the following U.S.patents: 4,895,810 5,045,903 5,089,434 5,182,234 5,019,522 5,262,336
5,256,583 4,748,103 5,283,202 5,231,474 5,434,095 5,528,058



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.