


## Thunderbolt IGBT™

The Thunderbolt IGBT™ is a new generation of high voltage power IGBTs. Using Non-Punch Through Technology the Thunderbolt IGBT™ offers superior ruggedness and ultrafast switching speed.

- **Low Forward Voltage Drop**
- **High Freq. Switching to 150KHz**
- **Low Tail Current**
- **Ultra Low Leakage Current**
- **Avalanche Rated**
- **RBSOA and SCSOA Rated**

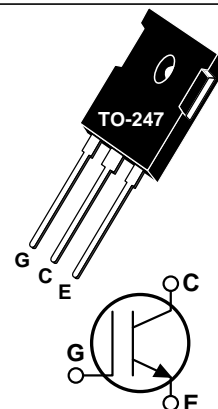


### MAXIMUM RATINGS

All Ratings:  $T_C = 25^\circ\text{C}$  unless otherwise specified.

Symbol	Parameter	APT30GT60BR	UNIT
$V_{CES}$	Collector-Emitter Voltage	600	Volts
$V_{CGR}$	Collector-Gate Voltage ( $R_{GE} = 20K\Omega$ )	600	
$V_{EC}$	Emitter-Collector Voltage	15	
$V_{GE}$	Gate-Emitter Voltage	$\pm 20$	
$I_{C1}$	Continuous Collector Current @ $T_C = 25^\circ\text{C}$	58	Amps
$I_{C2}$	Continuous Collector Current @ $T_C = 105^\circ\text{C}$	30	
$I_{CM1}$	Pulsed Collector Current <sup>①</sup> @ $T_C = 25^\circ\text{C}$	110	
$I_{CM2}$	Pulsed Collector Current <sup>①</sup> @ $T_C = 105^\circ\text{C}$	60	
$E_{AS}$	Single Pulse Avalanche Energy <sup>②</sup>	65	mJ
$P_D$	Total Power Dissipation	250	Watts
$T_J, T_{STG}$	Operating and Storage Junction Temperature Range	-55 to 150	°C
$T_L$	Max. Lead Temp. for Soldering: 0.063" from Case for 10 Sec.	300	

### STATIC ELECTRICAL CHARACTERISTICS

Symbol	Characteristic / Test Conditions	MIN	TYP	MAX	UNIT
$BV_{CES}$	Collector-Emitter Breakdown Voltage ( $V_{GE} = 0V, I_C = 0.5mA, T_j = -55^\circ\text{C}$ )	600			Volts
$RBV_{CES}$	Collector-Emitter Reverse Breakdown Voltage ( $V_{GE} = 0V, I_C = 50mA$ )	-15			
$V_{GE(TH)}$	Gate Threshold Voltage ( $V_{CE} = V_{GE}, I_C = 700\mu A, T_j = 25^\circ\text{C}$ )	3	4	5	
$V_{CE(ON)}$	Collector-Emitter On Voltage ( $V_{GE} = 15V, I_C = I_{C2}, T_j = 25^\circ\text{C}$ )	1.6	2.0	2.5	
	Collector-Emitter On Voltage ( $V_{GE} = 15V, I_C = I_{C2}, T_j = 150^\circ\text{C}$ )			2.8	
$I_{CES}$	Collector Cut-off Current ( $V_{CE} = V_{CES}, V_{GE} = 0V, T_j = 25^\circ\text{C}$ )			40	$\mu A$
	Collector Cut-off Current ( $V_{CE} = V_{CES}, V_{GE} = 0V, T_j = 150^\circ\text{C}$ )			1000	
$I_{GES}$	Gate-Emitter Leakage Current ( $V_{GE} = \pm 20V, V_{CE} = 0V$ )			$\pm 100$	nA

 **CAUTION:** These Devices are Sensitive to Electrostatic Discharge. Proper Handling Procedures Should Be Followed.

APT Website - <http://www.advancedpower.com>

**USA**  
405 S.W. Columbia Street  
**EUROPE**

Avenue J.F. Kennedy Bât B4 Parc Cadéra Nord

Bend, Oregon 97702-1035

Phone: (541) 382-8028

FAX: (541) 388-0364

F-33700 Merignac - France

Phone: (33) 5 57 92 15 15

FAX: (33) 5 56 47 97 61

## DYNAMIC CHARACTERISTICS

APT30GT60BR

Symbol	Characteristic	Test Conditions	MIN	TYP	MAX	UNIT
$C_{ies}$	Input Capacitance	<b>Capacitance</b> $V_{GE} = 0V$ $V_{CE} = 25V$ $f = 1\text{ MHz}$		1600		pF
$C_{oes}$	Output Capacitance			155		
$C_{res}$	Reverse Transfer Capacitance			90		
$Q_g$	Total Gate Charge <sup>③</sup>	<b>Gate Charge</b> $V_{GE} = 15V$ $V_{CC} = 0.5V_{CES}$ $I_C = I_{C2}$		140		nC
$Q_{ge}$	Gate-Emitter Charge			60		
$Q_{gc}$	Gate-Collector ("Miller") Charge			12		
$t_{d(on)}$	Turn-on Delay Time	<b>Resistive Switching (25°C)</b> $V_{GE} = 15V$ $V_{CC} = 0.8V_{CES}$ $I_C = I_{C2}$ $R_G = 10\Omega$		14		ns
$t_r$	Rise Time			55		
$t_{d(off)}$	Turn-off Delay Time			190		
$t_f$	Fall Time			140		
$t_{d(on)}$	Turn-on Delay Time	<b>Inductive Switching (150°C)</b> $V_{CLAMP(Peak)} = 0.66V_{CES}$ $V_{GE} = 15V$ $I_C = I_{C2}$ $R_G = 10\Omega$ $T_J = +150^\circ C$		18		ns
$t_r$	Rise Time			30		
$t_{d(off)}$	Turn-off Delay Time			300		
$t_f$	Fall Time			25		
$E_{on}$	Turn-on Switching Energy	$R_G = 10\Omega$ $T_J = +150^\circ C$		0.5		mJ
$E_{off}$	Turn-off Switching Energy			1.2		
$E_{ts}$	Total Switching Losses			1.70		
$t_{d(on)}$	Turn-on Delay Time	<b>Inductive Switching (25°C)</b> $V_{CLAMP(Peak)} = 0.66V_{CES}$ $V_{GE} = 15V$ $I_C = I_{C2}$ $R_G = 10\Omega$ $T_J = +25^\circ C$		18		ns
$t_r$	Rise Time			30		
$t_{d(off)}$	Turn-off Delay Time			260		
$t_f$	Fall Time			20		
$E_{ts}$	Total Switching Losses			1.30		
$g_{fe}$	Forward Transconductance	$V_{CE} = 20V, I_C = I_{C2}$	6			S

## THERMAL CHARACTERISTICS

Symbol	Characteristic	MIN	TYP	MAX	UNIT
$R_{\theta JC}$	Junction to Case			0.5	°C/W
$R_{\theta JA}$	Junction to Ambient			40	
Torque	Mounting Torque using a 6-32 or 3mm Binding Head Machine Screw		10		lb•in

① Repetitive Rating: Pulse width limited by maximum junction temperature.

②  $I_C = I_{C2}, V_{CC} = 50V, R_{GE} = 25\Omega, L = 100\mu H, T_J = 25^\circ C$

③ See MIL-STD-750 Method 3471

APT Reserves the right to change, without notice, the specifications and information contained herein.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.