

SOT23 PNP SILICON PLANAR HIGH VOLTAGE TRANSISTOR


ISSUE 4 - MARCH 2001



FMMTA92

PARTMARKING DETAILS: - FMMTA92 - 4E
- FMMTA92R - 8E

COMPLEMENTARY TYPES: - FMMTA92 - FMMTA42



SOT23

ABSOLUTE MAXIMUM RATINGS.

PARAMETER	SYMBOL	FMMTA92	UNIT
Collector-Base Voltage	V_{CBO}	-300	V
Collector-Emitter Voltage	V_{CEO}	-300	V
Emitter-Base Voltage	V_{EBO}	-5	V
Continuous Collector Current	I_C	-200	mA
Power Dissipation at $T_{amb} = 25^\circ\text{C}$	P_{tot}	330	mW
Operating and Storage Temperature Range	$T_j; T_{stg}$	-55 to +150	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS (at $T_{amb} = 25^\circ\text{C}$).


PARAMETER	SYMBOL	FMMTA92		UNIT	CONDITIONS.
		MIN.	MAX.		
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	-300		V	$I_C = -100\mu\text{A}, I_E = 0$
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	-300		V	$I_C = -1\text{mA}, I_B = 0^*$
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	-5		V	$I_E = -100\mu\text{A}, I_C = 0$
Collector Cut-Off Current	I_{CBO}		-0.25	μA	$V_{CB} = -200\text{V}, I_E = 0$ $V_{CB} = -160\text{V}, I_E = 0$
Emitter Cut-Off Current	I_{EBO}		-0.1	μA	$V_{EB} = -3\text{V}, I_E = 0$
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$		-0.5	V	$I_C = -20\text{mA}, I_B = -2\text{mA}^*$
Base-Emitter Saturation Voltage	$V_{BE(sat)}$		-0.9	V	$I_C = -20\text{mA}, I_B = -2\text{mA}^*$
Static Forward Current Transfer Ratio	h_{FE}	25 40 25			$I_C = -1\text{mA}, V_{CE} = 10\text{V}^*$ $I_C = -10\text{mA}, V_{CE} = 10\text{V}^*$ $I_C = -30\text{mA}, V_{CE} = -10\text{V}^*$
Transition Frequency	f_T	50		MHz	$I_C = -10\text{mA}, V_{CE} = -20\text{V}$ $f = 20\text{MHz}$
Output Capacitance	C_{obo}		6	pF	$V_{CB} = -20\text{V}, f = 1\text{MHz}$

*Measured under pulsed conditions. Pulse width=300 μs . Duty cycle $\leq 2\%$




FMMTA92


TYPICAL CHARACTERISTICS

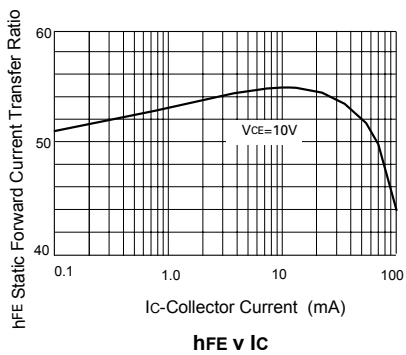

hFE v I_C

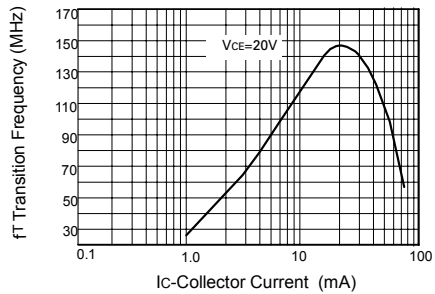

f_T vs I_C

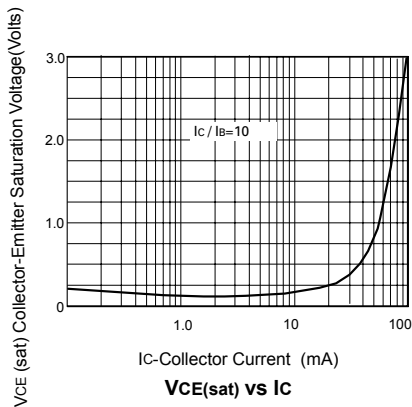

$V_{CE(sat)}$ vs I_C



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.