

SOT23 NPN SILICON PLANAR MEDIUM POWER TRANSISTOR

FMMT491A


ISSUE 3 – OCTOBER 1995

FEATURES

* Very Low Equivalent Resistance, $R_{CE(sat)}$ 195m Ω at 1A

COMPLEMENTARY TYPE – FMMT591A

PARTMARKING DETAIL – 41A



ABSOLUTE MAXIMUM RATINGS.

PARAMETER	SYMBOL	VALUE	UNIT
Collector-Base Voltage	V_{CBO}	40	V
Collector-Emitter Voltage	V_{CEO}	40	V
Emitter-Base Voltage	V_{EBO}	5	V
Continuous Collector Current	I_C	1	A
Peak Pulse Current	I_{CM}	2	A
Power Dissipation at $T_{amb}=25^\circ\text{C}$	P_{tot}	500	mW
Operating and Storage Temperature Range	$T_j; T_{stg}$	-55 to +150	$^\circ\text{C}$


ELECTRICAL CHARACTERISTICS (at $T_{amb} = 25^\circ\text{C}$).

PARAMETER	SYMBOL	MIN.	MAX.	UNIT	CONDITIONS.
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	40		V	$I_C=100\mu\text{A}$
Collector-Emitter Breakdown Voltage	$V_{CEO(sus)}$	40		V	$I_C=10\text{mA}^*$
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	5		V	$I_E=100\mu\text{A}$
Cut-Off Currents	I_{CBO}, I_{CES}		100	nA	$V_{CB}=30\text{V}, V_{CES}=30\text{V}$
Emitter Cut-Off Current	I_{EBO}		100	nA	$V_{EB}=4\text{V}$
Saturation Voltages	$V_{CE(sat)}$		0.3 0.5	V V	$I_C=500\text{mA}, I_B=50\text{mA}^*$ $I_C=1\text{A}, I_B=100\text{mA}^*$
	$V_{BE(sat)}$		1.1	V	$I_C=1\text{A}, I_B=100\text{mA}^*$
Base Emitter Turn On Voltage	$V_{BE(on)}$		1.0	V	$I_C=1\text{A}, V_{CE}=5\text{V}^*$
Static Forward Current Transfer Ratio	h_{FE}	300 300 200 35	900		$I_C=1\text{mA}, V_{CE}=5\text{V}^*$ $I_C=500\text{mA}, V_{CE}=5\text{V}^*$ $I_C=1\text{A}, V_{CE}=5\text{V}^*$ $I_C=2\text{A}, V_{CE}=5\text{V}^*$
Transition Frequency	f_T	150		MHz	$I_C=50\text{mA}, V_{CE}=10\text{V}$ $f=100\text{MHz}$
Collector-Base Breakdown Voltage	C_{obo}		10	pF	$V_{CB}=10\text{V}, f=1\text{MHz}$

*Measured under pulsed conditions. Pulse width=300 μs . Duty cycle $\leq 2\%$
Spice parameter data is available upon request for this device

FMMT491A

TYPICAL CHARACTERISTICS

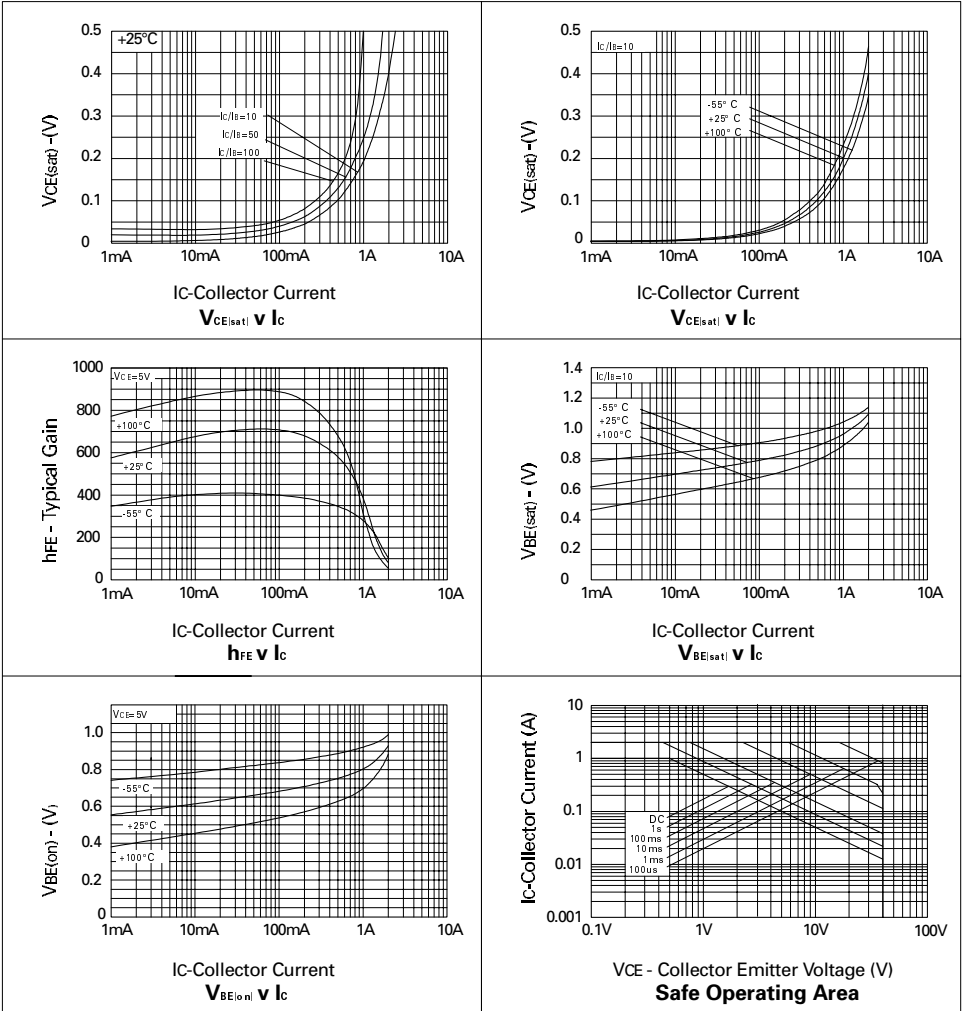



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.