

AN3834K


Reel Motor Driver IC for VCR

Overview

The AN3834K is an IC designed as a VCR reel motor drive.


Features

- Operating supply voltage range : $V_{CC}=4.5$ to $5.5V$.
- Operating motor supply voltage : $V_M=3$ to 18 .
- 3-phase full-wave forward/reverse overlap drive, built-in power transistor.
- Built-in high-accuracy torque ripple cancellation circuit.

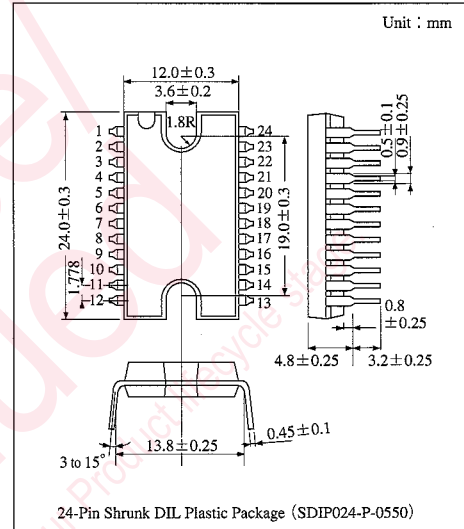

ICs for VCR

Block Diagram

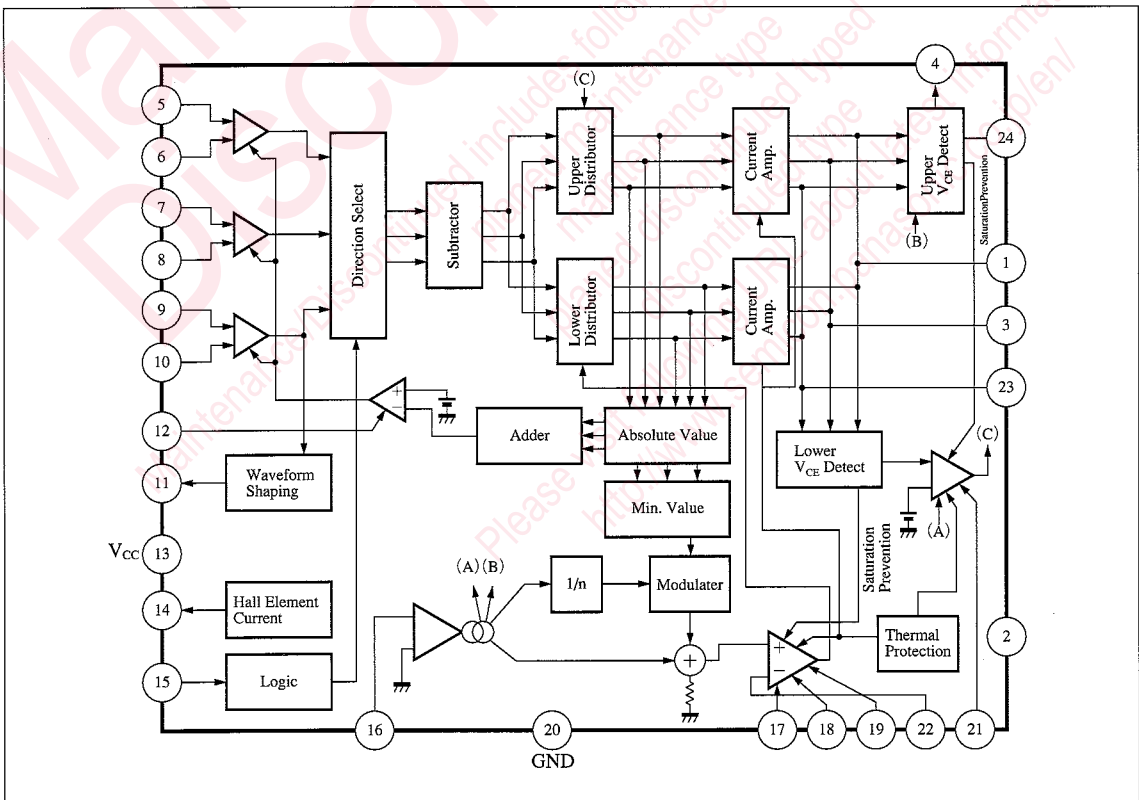

■ Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Unit
Supply voltage	V _{CC}	6	V
Power dissipation	P _D	1400	mW
Operating ambient temperature	T _{opr}	-20 to +70	°C
Storage temperature	T _{stg}	-55 to +150	°C
Motor supply voltage	V ₂₄	20	V
Motor drive current (n=1, 3, 23)	I _n	±1.5	A
Output pin voltage (n=1, 3, 23)	V _n	20	V
Pin voltage (m=5, 6, 7, 8 9, 10, 15, 16, 17, 19)	V _m	V _{CC}	V
Pin 1, 4 current	I ₁₄	-100	mA


■ Recommended Operating Range (Ta=25°C)

Parameter	Symbol	Range
Operating supply voltage range	V _{CC}	4.5V to 5.5V
Motor supply voltage	V _M	3V to 18V

■ Electrical Characteristics (V_{CC}=5V, Ta=25°C)

Parameter	Symbol	Condition	min	typ	max	Unit
Supply current	I _{CC}		5	—	15	mA
Torque command input current	I _{ET}		-4	—	0.5	μA
Torque command voltage	V _{ET}		0	—	1	V
Torque command offset voltage	V _{OFFS}		-6	—	4	mV
Output idle voltage	V _{idle}		—	—	4	mV
I/O gain	G _{io}		0.85	—	1.05	times
TL-CS offset voltage	ΔTL	TL=0.1V, E _T =0.5V	4	—	25	mV
Forward command voltage	ED _F		—	—	2.3	V
Reverse command voltage	ED _R		2.7	—	—	V
DS ON voltage	DS _{on}		2.7	—	—	V
DS OFF voltage	DS _{off}		—	—	2.3	V
PFG output voltage (H)	PFG _(H)	I _{PFG} = -100μA	2.8	—	—	V
PFG output voltage (L)	PFG _(L)	I _{PFG} = 500μA	—	—	0.9	V
Hall element supply voltage	V _H ⁺	I _{VH} ⁺ = -20mA	2.6	—	3.2	V
Hall element input allowable voltage	H _{in}		1.2	—	4	V
Hall element input offset voltage	ΔH		-8	—	8	mV
Lower output voltage	V _N	E _T =0.6V	1.5	—	2.5	V
Upper saturation voltage	V _{P(sat)}	I _O =1A	—	—	2	V
Switching power control output	V _S	E _T =0.2V, V _M -A1=1.05V	2	—	3	V
Switching power control output gain	G _{VS}		2.2	—	3	times
Ripple cancellation rate	α	ATC=20mV	7	14	21	%

Application Circuit

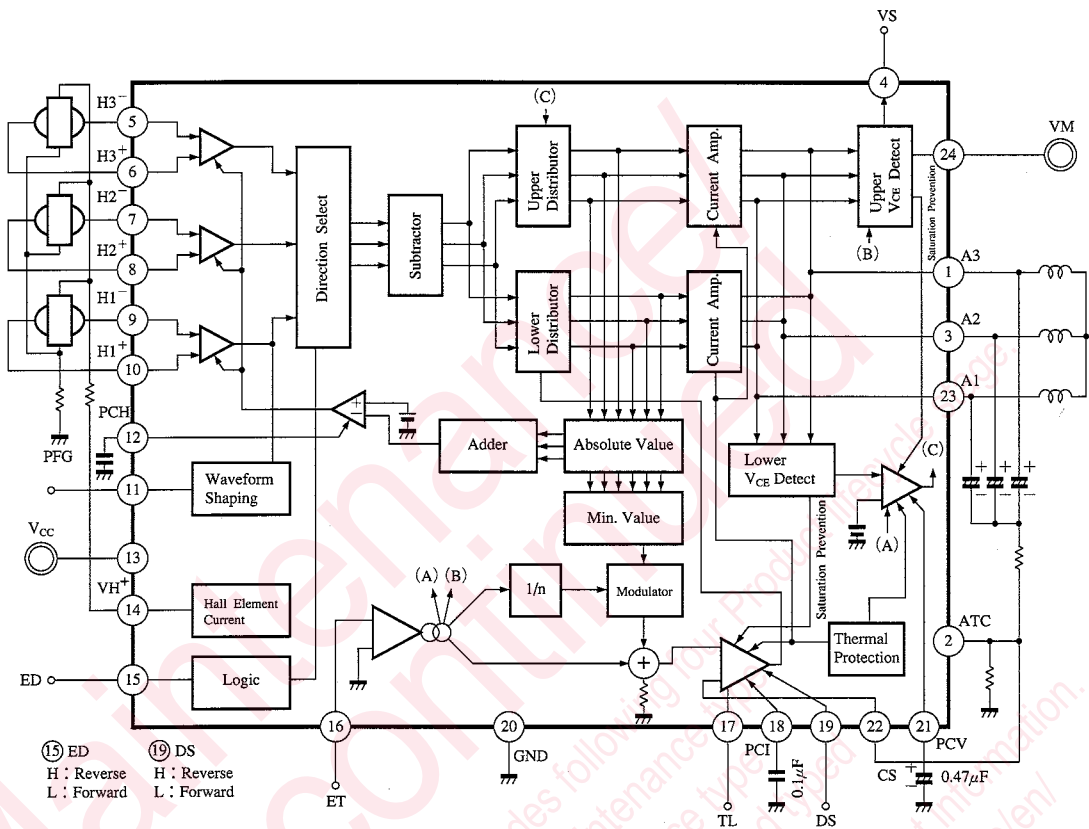










15 ED H : Reverse L : Forward
 19 DS H : Reverse L : Forward

ICs for VCR

Pin Descriptions

Pin No.	Pin name	Typ. waveform	Description	I/O Impedance	Equivalent circuit
1 3 23	A3 drive output 3 A2 drive output 2 A1 drive output 1		Connect to the motor coil.	—	
2	ATC total current output		Outputs the total current of the output transistors.	—	
4	VS switching power control output		Outputs a voltage proportional to V _{CE} of the output transistor on the source side in order to control the switching power supply.	17kΩ	

■ Pin Descriptions (cont.)

Pin No.	Pin name	Typ. waveform	Description	I/O impedance	Equivalent circuit
5 6 7 8 9 10	H ₅ Hall element input H ₆ Hall element input H ₇ Hall element input H ₈ Hall element input H ₉ Hall element input H ₁₀ Hall element input		Inputs Hall element output of the motor.	—	
11	PFG Hall element input waveform shaping output		Shapes and outputs a Hall element input waveform	16kΩ	
12	PCH Hall amp. phase compensation		AGC loop phase compensation pin for the Hall amplifier.	—	
13	V _{CC} power pin	—	Inputs the supply voltage.	—	—
14	VH ⁺ Hall element power supply	—	Outputs the supply voltage for the Hall elements.	—	
15	ED direction command input pin	—	Gives a motor rotary direction with a 3-valued input.	—	
16	ET torque command input	—	Inputs a torque command voltage.	—	


Pin Descriptions (cont.)

Pin No.	Pin name	Typ. waveform	Description	I/O impedance	Equivalent circuit
17	TL torque limiter	—	Sets the max. voltage of the ATC pin.	—	
22	CS current detection pin	—	Inputs a current value detected by the resistor connected to the ATC pin.	—	
18	PCI current feedback system phase compensation	—	Phase compensation pin of the current control system for the output transistor on the sync. side.	—	
19	DS disable input	—	DS=L→Motor drive command. DS=H→Motor stop. Specifies motor start/stop.	—	
20	GND pin	—	Grounding pin	—	—
21	PCV voltage feedback system phase compensation	—	Phase compensation pin of the control system for the output transistor on the source side.	—	
24	V _M Motor power	—	Inputs the motor power.	—	—

ICs for
VCR

■ Supplementary Explanation

- Hall Input and Output Current Phases

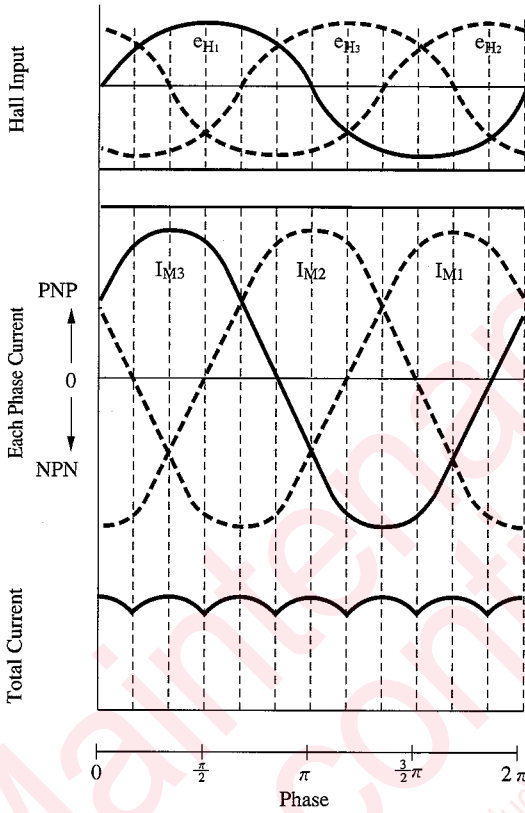

Request for your special attention and precautions in using the technical information and semiconductors described in this book

- (1) If any of the products or technical information described in this book is to be exported or provided to non-residents, the laws and regulations of the exporting country, especially, those with regard to security export control, must be observed.
- (2) The technical information described in this book is intended only to show the main characteristics and application circuit examples of the products. No license is granted in and to any intellectual property right or other right owned by Panasonic Corporation or any other company. Therefore, no responsibility is assumed by our company as to the infringement upon any such right owned by any other company which may arise as a result of the use of technical information described in this book.
- (3) The products described in this book are intended to be used for standard applications or general electronic equipment (such as office equipment, communications equipment, measuring instruments and household appliances).
Consult our sales staff in advance for information on the following applications:
 - Special applications (such as for airplanes, aerospace, automobiles, traffic control equipment, combustion equipment, life support systems and safety devices) in which exceptional quality and reliability are required, or if the failure or malfunction of the products may directly jeopardize life or harm the human body.
 - Any applications other than the standard applications intended.
- (4) The products and product specifications described in this book are subject to change without notice for modification and/or improvement. At the final stage of your design, purchasing, or use of the products, therefore, ask for the most up-to-date Product Standards in advance to make sure that the latest specifications satisfy your requirements.
- (5) When designing your equipment, comply with the range of absolute maximum rating and the guaranteed operating conditions (operating power supply voltage and operating environment etc.). Especially, please be careful not to exceed the range of absolute maximum rating on the transient state, such as power-on, power-off and mode-switching. Otherwise, we will not be liable for any defect which may arise later in your equipment.
 - Even when the products are used within the guaranteed values, take into the consideration of incidence of break down and failure mode, possible to occur to semiconductor products. Measures on the systems such as redundant design, arresting the spread of fire or preventing glitch are recommended in order to prevent physical injury, fire, social damages, for example, by using the products.
- (6) Comply with the instructions for use in order to prevent breakdown and characteristics change due to external factors (ESD, EOS, thermal stress and mechanical stress) at the time of handling, mounting or at customer's process. When using products for which damp-proof packing is required, satisfy the conditions, such as shelf life and the elapsed time since first opening the packages.
- (7) This book may be not reprinted or reproduced whether wholly or partially, without the prior written permission of our company.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.