



NPN Silicon Digital Transistor

- Switching circuit, inverter, interface circuit, driver circuit
- Built in bias resistor ($R_1=22k\Omega$)

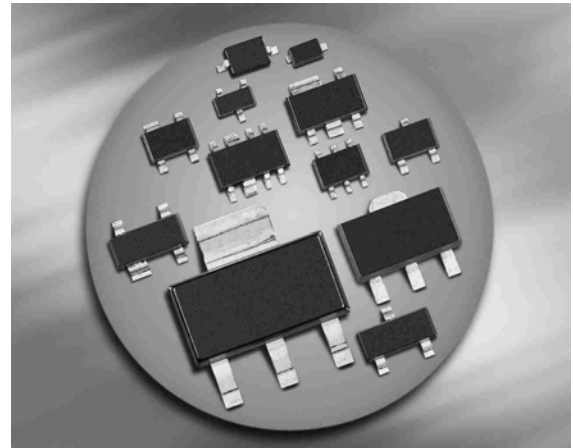

**BCR139/F/L3
BCR139T**



Type	Marking	Pin Configuration						Package
		1=B	2=E	3=C	-	-	-	
BCR139	WYs	1=B	2=E	3=C	-	-	-	SOT23
BCR139F	WYs	1=B	2=E	3=C	-	-	-	TSFP-3
BCR139L3	WY	1=B	2=E	3=C	-	-	-	TSLP-3-4
BCR139T	WYs	1=B	2=E	3=C	-	-	-	SC75

Maximum Ratings

Parameter	Symbol	Value	Unit
Collector-emitter voltage	V_{CEO}	50	V
Collector-base voltage	V_{CBO}	50	
Emitter-base voltage	V_{EBO}	5	
Input on voltage	$V_{i(on)}$	30	
Collector current	I_C	100	mA
Total power dissipation- BCR139, $T_S \leq 102^\circ\text{C}$ BCR139F, $T_S \leq 128^\circ\text{C}$ BCR139L3, $T_S \leq 135^\circ\text{C}$ BCR139T, $T_S \leq 109^\circ\text{C}$	P_{tot}	200 250 250 250	mW
Junction temperature	T_j	150	°C
Storage temperature	T_{stg}	-65 ... 150	

Thermal Resistance

Parameter	Symbol	Value	Unit
Junction - soldering point ¹⁾ BCR139 BCR139F BCR139L3 BCR139T	R_{thJS}	≤ 240 ≤ 90 ≤ 60 ≤ 165	K/W


¹For calculation of R_{thJA} please refer to Application Note Thermal Resistance

Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
DC Characteristics					
Collector-emitter breakdown voltage $I_C = 100 \mu\text{A}, I_B = 0$	$V_{(BR)CEO}$	50	-	-	V
Collector-base breakdown voltage $I_C = 10 \mu\text{A}, I_E = 0$	$V_{(BR)CBO}$	50	-	-	
Emitter-base breakdown voltage $I_E = 10 \mu\text{A}, I_C = 0$	$V_{(BR)EBO}$	5	-	-	
Collector-base cutoff current $V_{CB} = 40 \text{ V}, I_E = 0$	I_{CBO}	-	-	100	nA
DC current gain ¹⁾ $I_C = 5 \text{ mA}, V_{CE} = 5 \text{ V}$	h_{FE}	120	-	630	-
Collector-emitter saturation voltage ¹⁾ $I_C = 10 \text{ mA}, I_B = 0.5 \text{ mA}$	V_{CEsat}	-	-	0.3	V
Input off voltage $I_C = 100 \mu\text{A}, V_{CE} = 5 \text{ V}$	$V_{i(off)}$	0.4	-	0.8	
Input on voltage $I_C = 2 \text{ mA}, V_{CE} = 0.3 \text{ V}$	$V_{i(on)}$	0.5	-	1.1	
Input resistor	R_1	15	22	29	k Ω
¹⁾ Pulse test: $t < 300 \mu\text{s}; D < 2\%$					
AC Characteristics					
Transition frequency $I_C = 10 \text{ mA}, V_{CE} = 5 \text{ V}, f = 100 \text{ MHz}$	f_T	-	150	-	MHz
Collector-base capacitance $V_{CB} = 10 \text{ V}, f = 1 \text{ MHz}$	C_{cb}	-	3	-	pF


DC current gain $h_{FE} = f(I_C)$

$V_{CE} = 5V$ (common emitter configuration)

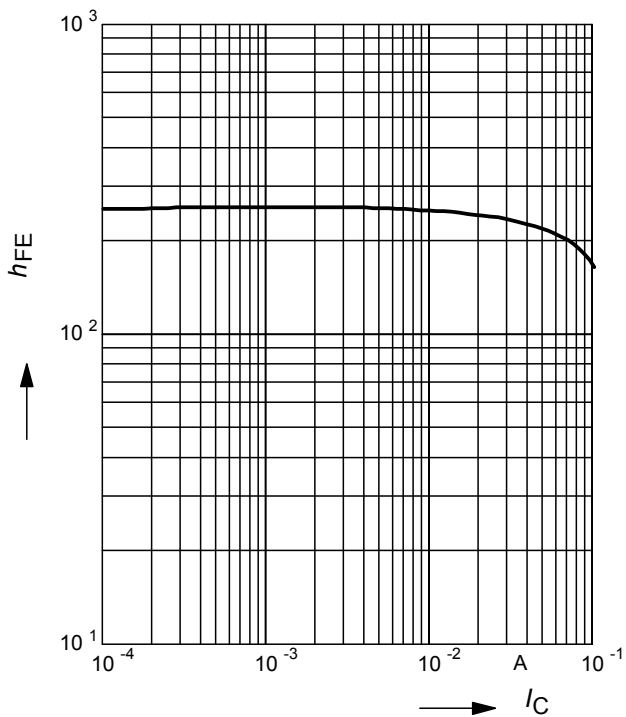


Collector-emitter saturation voltage

$V_{CEsat} = f(I_C), h_{FE} = 20$

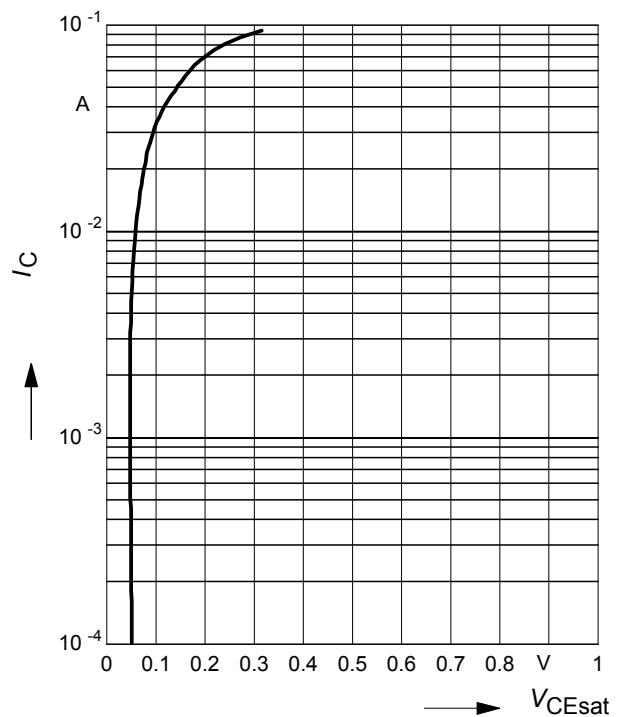


Input on Voltage $V_{i(on)} = f(I_C)$

$V_{CE} = 0.3V$ (common emitter configuration)

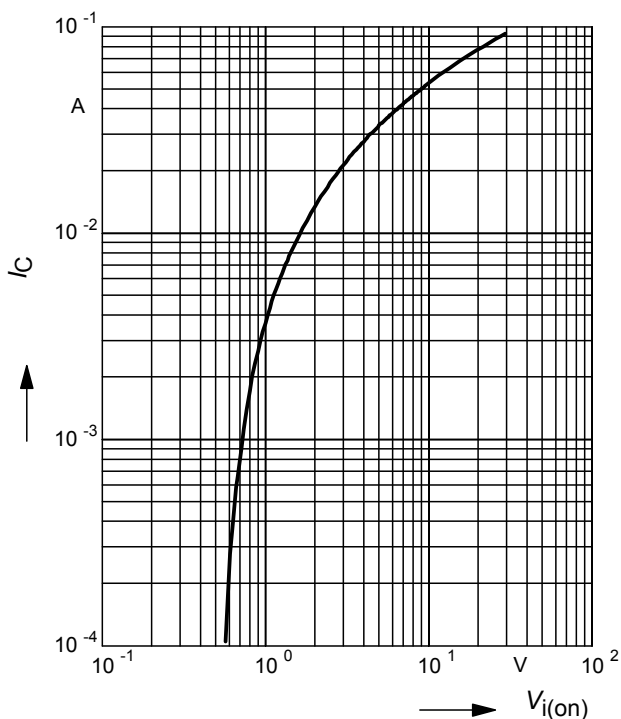

Input off voltage $V_{i(off)} = f(I_C)$

$V_{CE} = 5V$ (common emitter configuration)

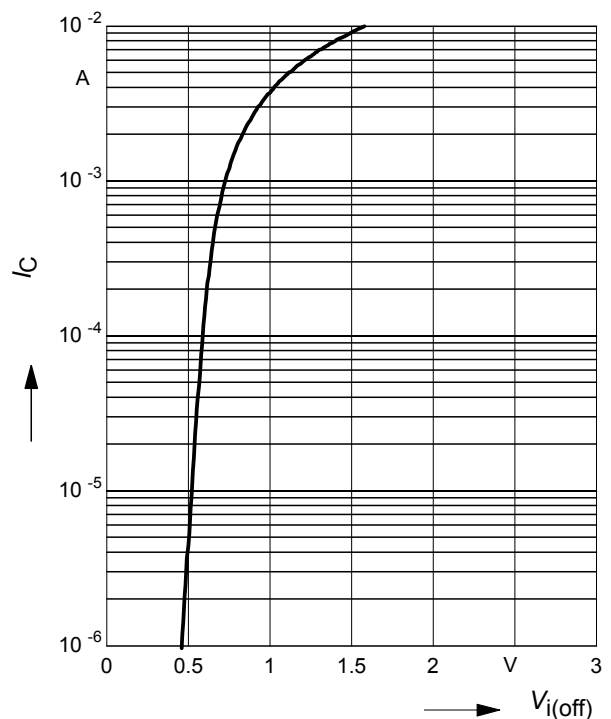

Total power dissipation $P_{tot} = f(T_S)$

BCR139



Total power dissipation $P_{tot} = f(T_S)$

BCR139F




Total power dissipation $P_{tot} = f(T_S)$

BCR139L3




Total power dissipation $P_{tot} = f(T_S)$

BCR139T

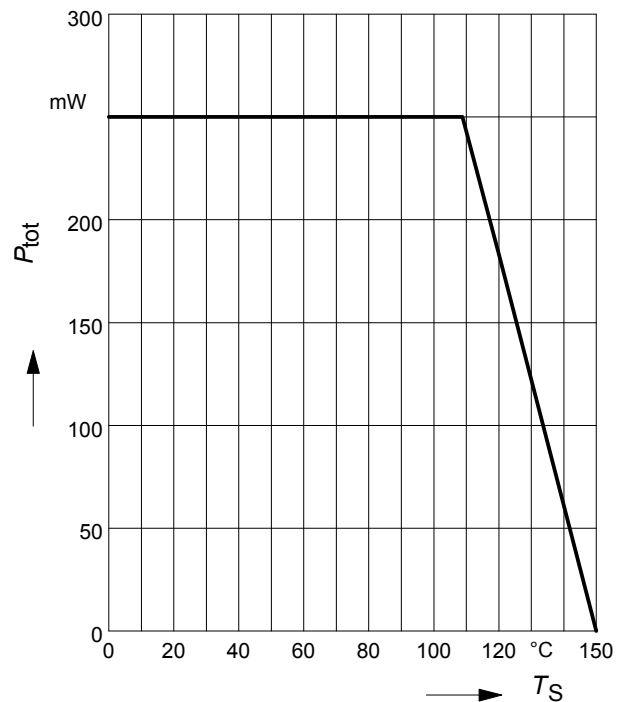

Permissible Pulse Load $R_{thJS} = f(t_p)$


BCR139

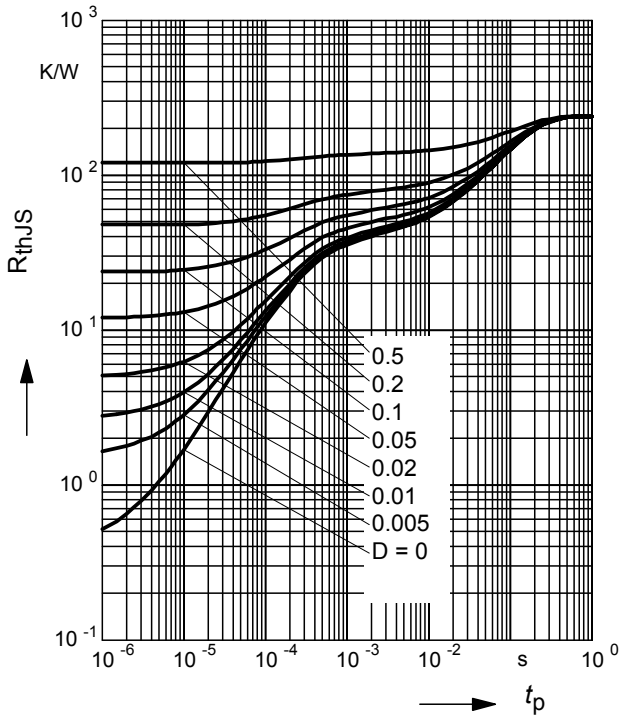

Permissible Pulse Load


$P_{totmax}/P_{totDC} = f(t_p)$

BCR139

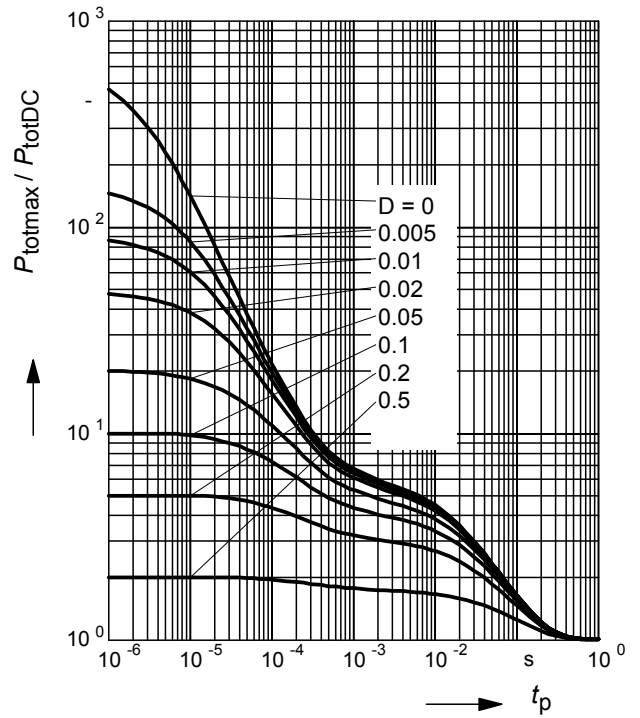

Permissible Puls Load $R_{thJS} = f(t_p)$


BCR139F

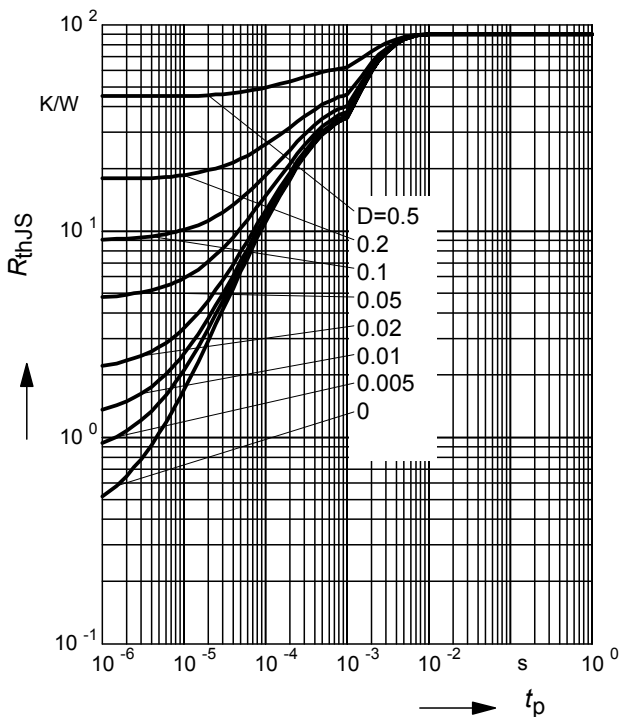

Permissible Pulse Load


$P_{totmax}/P_{totDC} = f(t_p)$

BCR139F

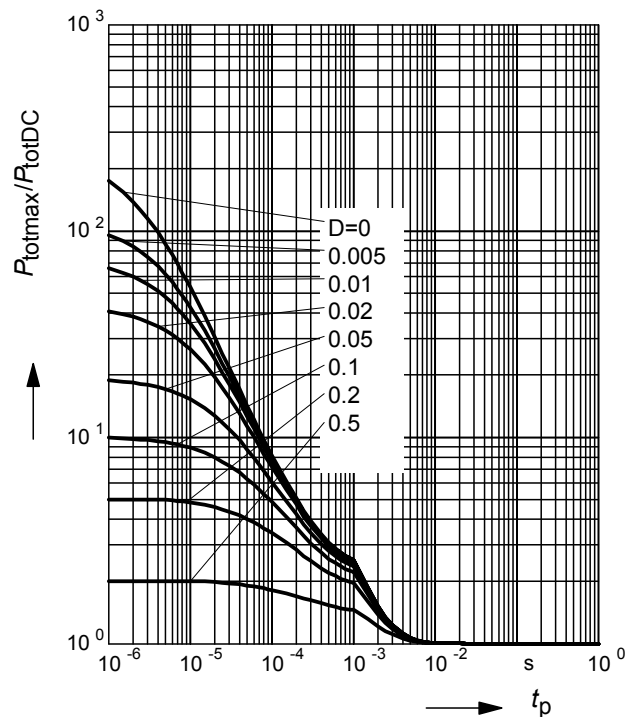

Permissible Puls Load $R_{thJS} = f(t_p)$


BCR139L3

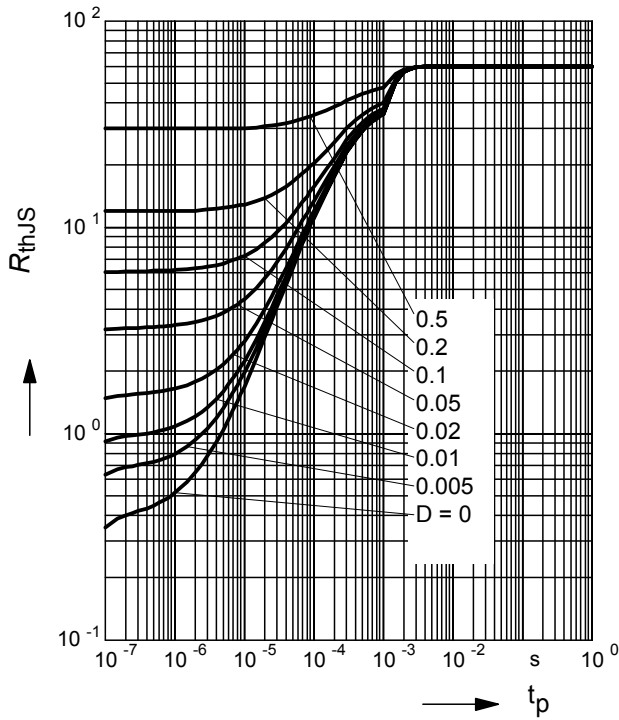

Permissible Pulse Load


$P_{totmax}/P_{totDC} = f(t_p)$

BCR139L3

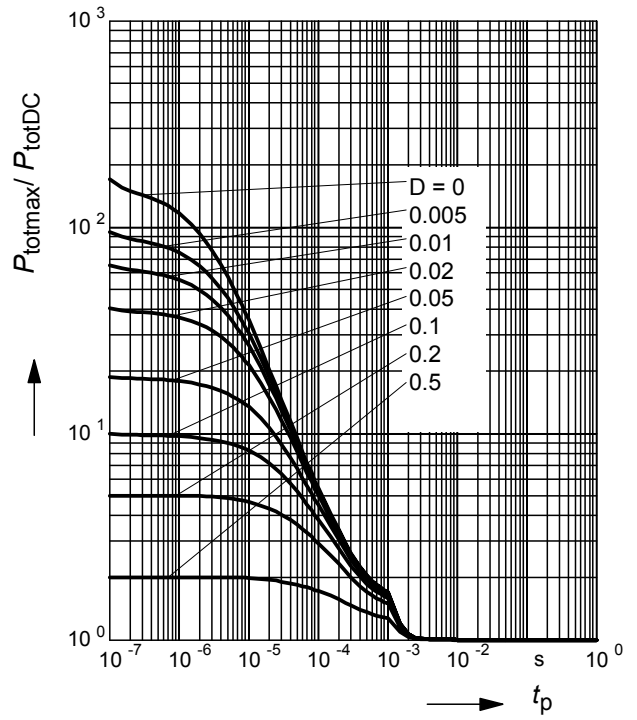

Permissible Puls Load $R_{thJS} = f(t_p)$


BCR139T

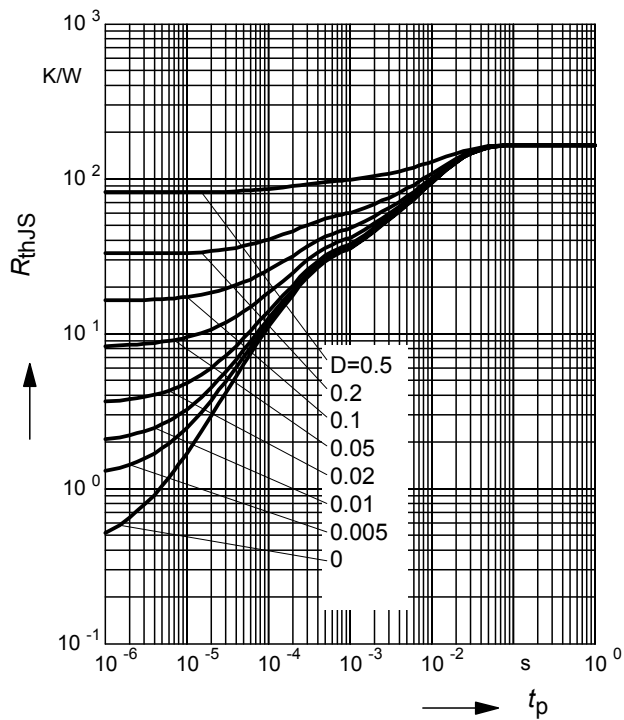

Permissible Pulse Load

$P_{totmax}/P_{totDC} = f(t_p)$

BCR139T

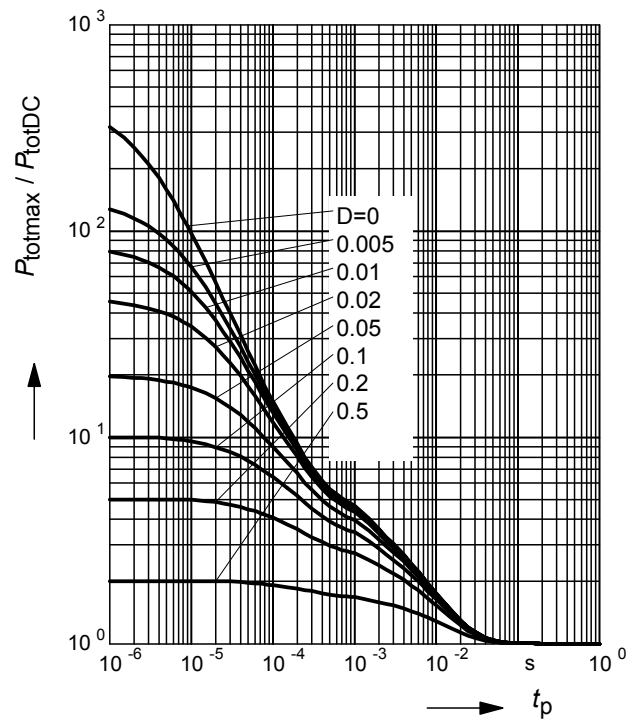



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.