


Thunderbolt IGBT™

The Thunderbolt IGBT™ is a new generation of high voltage power IGBTs. Using Non-Punch Through Technology the Thunderbolt IGBT™ offers superior ruggedness and ultrafast switching speed.

- Low Forward Voltage Drop
- Low Tail Current
- Avalanche Rated
- High Freq. Switching to 150KHz
- Ultra Low Leakage Current
- RBSOA and SCSOA Rated

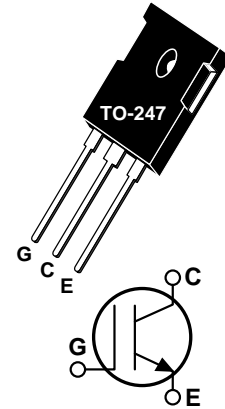


MAXIMUM RATINGS

All Ratings: $T_C = 25^\circ\text{C}$ unless otherwise specified.

Symbol	Parameter	APT40GT60BR	UNIT
V_{CES}	Collector-Emitter Voltage	600	Volts
V_{CGR}	Collector-Gate Voltage ($R_{GE} = 20K\Omega$)	600	
V_{EC}	Emitter-Collector Voltage	15	
V_{GE}	Gate-Emitter Voltage	± 20	
I_{C1}	Continuous Collector Current @ $T_C = 25^\circ\text{C}$	80	Amps
I_{C2}	Continuous Collector Current @ $T_C = 110^\circ\text{C}$	40	
I_{CM1}	Pulsed Collector Current ^① @ $T_C = 25^\circ\text{C}$	160	
I_{CM2}	Pulsed Collector Current ^① @ $T_C = 110^\circ\text{C}$	80	
E_{AS}	Single Pulse Avalanche Energy ^②	40	mJ
P_D	Total Power Dissipation	350	Watts
T_J, T_{STG}	Operating and Storage Junction Temperature Range	-55 to 150	$^\circ\text{C}$
T_L	Max. Lead Temp. for Soldering: 0.063" from Case for 10 Sec.	300	

STATIC ELECTRICAL CHARACTERISTICS

Symbol	Characteristic / Test Conditions	MIN	TYP	MAX	UNIT
BV_{CES}	Collector-Emitter Breakdown Voltage ($V_{GE} = 0V, I_C = 0.5mA, T_j = -55^\circ\text{C}$)	600			Volts
RBV_{CES}	Collector-Emitter Reverse Breakdown Voltage ($V_{GE} = 0V, I_C = 50mA$)	-15			
$V_{GE(TH)}$	Gate Threshold Voltage ($V_{CE} = V_{GE}, I_C = 500\mu A, T_j = 25^\circ\text{C}$)	3	4	5	
$V_{CE(ON)}$	Collector-Emitter On Voltage ($V_{GE} = 15V, I_C = I_{C2}, T_j = 25^\circ\text{C}$)	1.6	2.0	2.5	μA
	Collector-Emitter On Voltage ($V_{GE} = 15V, I_C = I_{C2}, T_j = 150^\circ\text{C}$)			2.8	
I_{CES}	Collector Cut-off Current ($V_{CE} = V_{CES}, V_{GE} = 0V, T_j = 25^\circ\text{C}$)			80	μA
	Collector Cut-off Current ($V_{CE} = V_{CES}, V_{GE} = 0V, T_j = 150^\circ\text{C}$)			2000	
I_{GES}	Gate-Emitter Leakage Current ($V_{GE} = \pm 20V, V_{CE} = 0V$)			± 100	nA

 **CAUTION:** These Devices are Sensitive to Electrostatic Discharge. Proper Handling Procedures Should Be Followed.

USA
405 S.W. Columbia Street
EUROPE
Avenue J.F. Kennedy Bât B4 Parc Cadéra Nord

APT Website - <http://www.advancedpower.com>

Bend, Oregon 97702-1035

Phone: (541) 382-8028

FAX: (541) 388-0364

F-33700 Merignac - France

Phone: (33) 5 57 92 15 15

FAX: (33) 5 56 47 97 61

DYNAMIC CHARACTERISTICS

APT40GT60BR

Symbol	Characteristic	Test Conditions	MIN	TYP	MAX	UNIT
C_{ies}	Input Capacitance	Capacitance $V_{GE} = 0V$ $V_{CE} = 25V$ $f = 1\text{ MHz}$		2200		pF
C_{oes}	Output Capacitance			220		
C_{res}	Reverse Transfer Capacitance			130		
Q_g	Total Gate Charge ^③	Gate Charge $V_{GE} = 15V$ $V_{CC} = 0.5V_{CES}$ $I_C = I_{C2}$		190		nC
Q_{ge}	Gate-Emitter Charge			80		
Q_{gc}	Gate-Collector ("Miller") Charge			15		
$t_{d(on)}$	Turn-on Delay Time	Resistive Switching (25°C) $V_{GE} = 15V$ $V_{CC} = 0.8V_{CES}$ $I_C = I_{C2}$ $R_G = 10\Omega$		10		ns
t_r	Rise Time			34		
$t_{d(off)}$	Turn-off Delay Time			115		
t_f	Fall Time			125		
$t_{d(on)}$	Turn-on Delay Time	Inductive Switching (150°C) $V_{CLAMP(Peak)} = 0.66V_{CES}$ $V_{GE} = 15V$ $I_C = I_{C2}$ $R_G = 10\Omega$ $T_J = +150^\circ C$		25		ns
t_r	Rise Time			40		
$t_{d(off)}$	Turn-off Delay Time			190		
t_f	Fall Time			70		
E_{on}	Turn-on Switching Energy	$R_G = 10\Omega$ $T_J = +150^\circ C$		1.5		mJ
E_{off}	Turn-off Switching Energy			0.9		
E_{ts}	Total Switching Losses			2.4		
$t_{d(on)}$	Turn-on Delay Time	Inductive Switching (25°C) $V_{CLAMP(Peak)} = 0.66V_{CES}$ $V_{GE} = 15V$ $I_C = I_{C2}$ $R_G = 10\Omega$ $T_J = +25^\circ C$		25		ns
t_r	Rise Time			40		
$t_{d(off)}$	Turn-off Delay Time			160		
t_f	Fall Time			65		
E_{ts}	Total Switching Losses			1.8		
g_{fe}	Forward Transconductance	$V_{CE} = 20V, I_C = I_{C2}$	4			S

THERMAL CHARACTERISTICS

Symbol	Characteristic	MIN	TYP	MAX	UNIT
$R_{\theta JC}$	Junction to Case			0.36	°C/W
$R_{\theta JA}$	Junction to Ambient			40	
Torque	Mounting Torque using a 6-32 or 3mm Binding Head Machine Screw		10		lb•in

① Repetitive Rating: Pulse width limited by maximum junction temperature.

② $I_C = I_{C2}, V_{CC} = 50V, R_{GE} = 25\Omega, L = 200\mu H, T_J = 25^\circ C$

③ See MIL-STD-750 Method 3471

APT Reserves the right to change, without notice, the specifications and information contained herein.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.