

DATA SHEET

BGY586; BGY587 CATV amplifier modules

Product specification
File under Discrete Semiconductors, SC16

February 1995

Philips Semiconductors



PHILIPS

CATV amplifier modules

BGY586; BGY587

FEATURES


- Excellent linearity
- Extremely low noise
- Silicon nitride passivation
- Rugged construction
- TiPtAu metallized crystals ensure optimal reliability.

DESCRIPTION

Hybrid amplifier modules for CATV systems operating over a frequency range of 40 to 550 MHz at a voltage supply of 24 V (DC). The BGY586 is intended for use as a pre-amplifier and BGY587 as a final amplifier.

PINNING - SOT115J

PIN	DESCRIPTION
1	input
2	common
3	common
5	+V _B
7	common
8	common
9	output

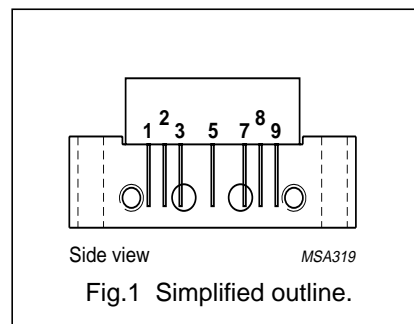

QUICK REFERENCE DATA

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
G _p	power gain	f = 50 MHz	21.5	–	22.5	dB
		f = 550 MHz	22	–	–	dB
I _{tot}	total current consumption (DC)	V _B = 24 V				
			BGY586	–	180	200
	BGY587	–	220	240	mA	

LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	MIN.	MAX.	UNIT
V _i	RF input voltage	–	65	dBmV
T _{stg}	storage temperature	–40	+100	°C
T _{mb}	operating mounting base temperature	–20	+100	°C

CATV amplifier modules

BGY586; BGY587

CHARACTERISTICSBandwidth 40 to 550 MHz; $V_B = 24$ V; $T_{mb} = 30$ °C; $Z_S = Z_L = 75$ Ω .

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
G_p	power gain	f = 50 MHz	21.5	–	22.5	dB
		f = 550 MHz	22	–	–	dB
SL	slope cable equivalent	f = 40 to 550 MHz	0.2	–	1.5	dB
FL	flatness of frequency response	f = 40 to 550 MHz	–	–	± 0.2	dB
S_{11}	input return losses	f = 40 to 80 MHz	20	–	–	dB
		f = 80 to 160 MHz	19	–	–	dB
		f = 160 to 550 MHz	18	–	–	dB
S_{22}	output return losses	f = 40 to 80 MHz	20	–	–	dB
		f = 80 to 160 MHz	19	–	–	dB
		f = 160 to 550 MHz	18	–	–	dB
S_{21}	phase response	f = 50 MHz	+135	–	+225	deg
CTB	composite triple beat BGY586 BGY587	77 channels flat; $V_o = 44$ dBmV; measured at 547.25 MHz	–	–	–53	dB
			–	–	–57	dB
X_{mod}	cross modulation BGY586 BGY587	77 channels flat; $V_o = 44$ dBmV; measured at 55.25 MHz	–	–	–55	dB
			–	–	–58	dB
CSO	composite second order distortion BGY586 BGY587	77 channels flat; $V_o = 44$ dBmV; measured at 548.5 MHz	–	–	–50	dB
			–	–	–54	dB
d_2	second order distortion BGY586 BGY587	note 1	–	–	–62	dB
			–	–	–66	dB
V_o	output voltage BGY586 BGY587	$d_{im} = -60$ dB; note 2	58.5	–	–	dBmV
			61	–	–	dBmV
F	noise figure BGY586 BGY587	f = 550 MHz	–	–	6.5	dB
			–	–	7	dB
I_{tot}	total current consumption (DC) BGY586 BGY587	note 3	–	180	200	mA
			–	220	240	mA

Notes

- $f_p = 55.25$ MHz; $V_p = 44$ dBmV; $f_q = 493.25$ MHz; $V_q = 44$ dBmV; measured at $f_p + f_q = 548.5$ MHz.
- Measured according to DIN45004B: $f_p = 540.25$ MHz; $V_p = V_o$; $f_q = 547.25$ MHz; $V_q = V_o - 6$ dB; $f_r = 549.25$ MHz; $V_r = V_o - 6$ dB; measured at $f_p + f_q - f_r = 538.25$ MHz.
- The modules normally operate at $V_B = 24$ V, but are able to withstand supply transients up to 30 V.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.