

3-phase motor driver for CD-ROMs

BD6660FV

The BD6660FV is low power consumption CD-ROM spindle driver that uses MOS transistor in the output. To meet the requirements for notebook computers, the thin power package SSOP-B28 is used and a PWM drive with a MOS processor output stage achieves an extremely low power consumption.

●Applications

Portable CD-ROMs, DVDs

●Features

- 1) Direct PWM drive.
- 2) Built-in power save circuit.
- 3) Built-in current limiter circuit.
- 4) Built-in FG output.
- 5) Built-in Hall biasing.
- 6) Built-in reverse-rotation prevention circuit.
- 7) Built-in short brake.
- 8) Low power consumption with the output MOSFET.
- 9) Built-in brake mode switching circuit.
- 10) Built-in rotation detection pin.

●Absolute maximum ratings (Ta = 25°C)

Parameter	Symbol	Limits	Unit
Applied voltage	V _{CC}	7	V
Applied voltage	V _M	7	V
Power dissipation	P _d	1020*1	mW
Operating temperature	T _{opr}	-20~+75	°C
Storage temperature	T _{stg}	-55~+150	°C
Output current	I _{OMAX}	1000*2	mA


*1 When mounted on a 70mm×70mm×1.6mm glass epoxy board.
Reduced by 8.16mW for each increase in Ta of 1°C over 25°C.

*2 Should not exceed Pd or ASO values.

●Recommended operating conditions (Ta = 25°C)

Parameter	Symbol	Limits	Unit
Operating power supply voltage	V _{CC}	4.5~5.5	V
	V _M	3~6.5	V
	V _{PUMP}	14	V

● Block diagram

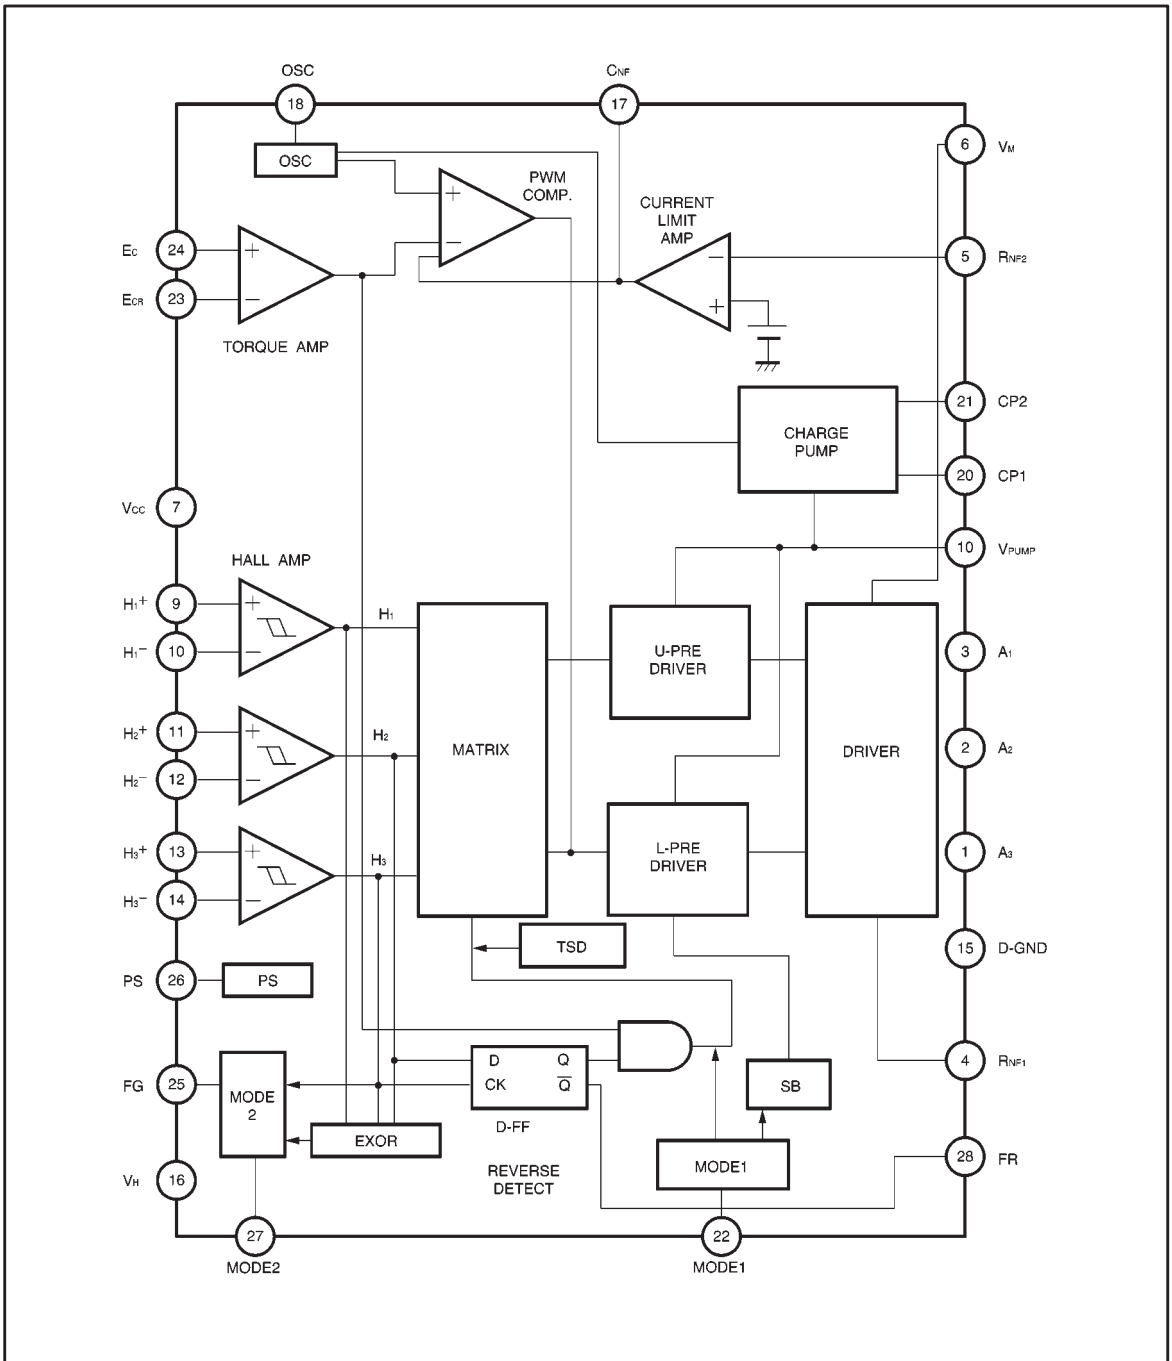


● Pin descriptions

Pin No.	Pin name	Function
1	A ₃	Output
2	A ₂	Output
3	A ₁	Output
4	R _{NF1}	For connection of resistor for output current detection
5	R _{NF2}	For connection of resistor for output current detection
6	V _M	Motor power supply
7	V _{CC}	Power supply
8	GND	GND
9	H ₁ ⁺	Hall signal input
10	H ₁ ⁻	Hall signal input
11	H ₂ ⁺	Hall signal input
12	H ₂ ⁻	Hall signal input
13	H ₃ ⁺	Hall signal input
14	H ₃ ⁻	Hall signal input
15	D—GND	Digital—GND
16	V _H	Hall bias
17	C _{NF}	For connection of capacitor for phase compensation
18	OSC	For connection of capacitor for oscillator
19	V _{PUMP}	Charge pump output
20	CP ₁	For connection of capacitor 1 for charge pump
21	CP ₂	For connection of capacitor 2 for charge pump
22	MODE1	Brake mode switch
23	E _{CR}	Output voltage control reference
24	E _c	Output voltage control
25	FG	FG output
26	PS	Power save
27	MODE2	FG output switching
28	FR	Rotation direction sensor

● Input and output circuits

(1) Power save

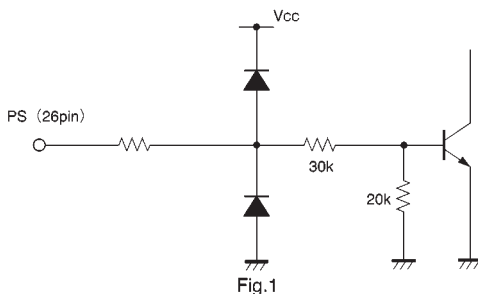

(2) Torque amplifier

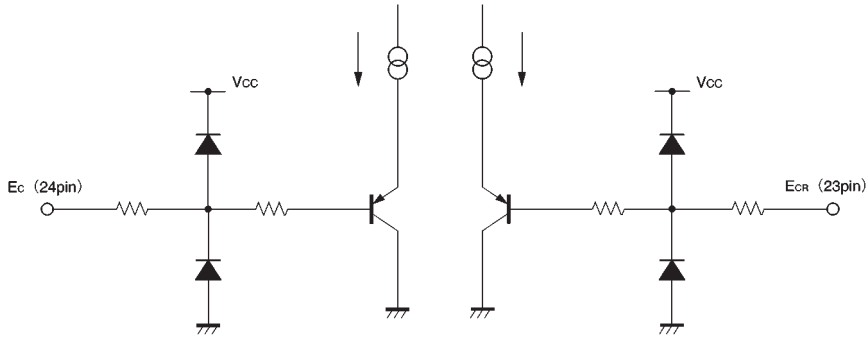


Fig.2

(3) MODE1


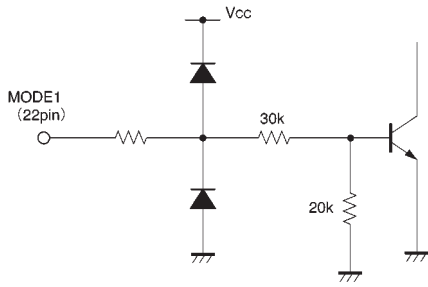


Fig.3

(4) MODE2

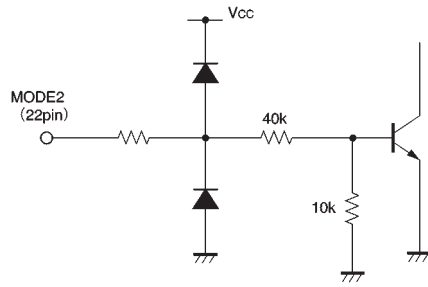

※ Resistor values are typical values.

Fig.4

(5) Output pin

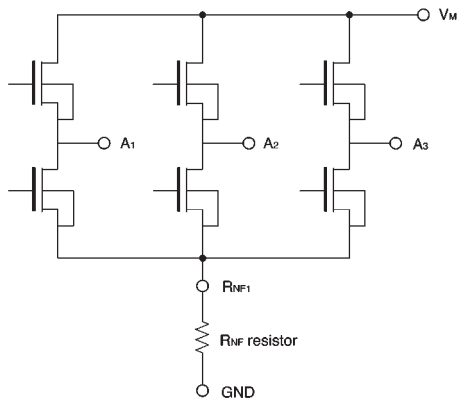


Fig.5

(6) Hall bias pin

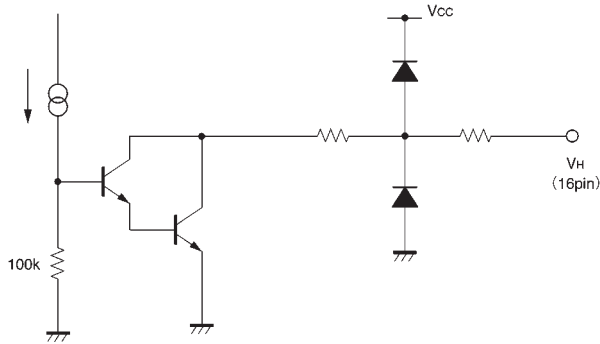


Fig.6

(7) FG output / CP₁ output / FR output




Fig.7

(8) CP₂ / V_{PUMP} output

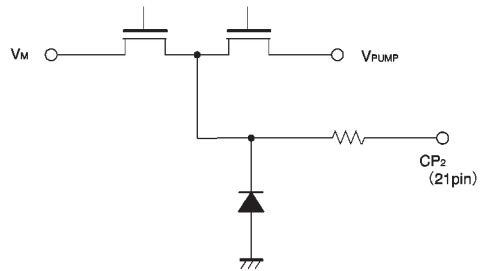


Fig.8

●Electrical characteristics (unless otherwise noted, Ta = 25°C, V_{CC} = 5V, V_M = 5V)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Coniditions
〈Overall〉						
Circuit current 1	I _{CC1}	—	—	0.4	mA	Standby mode
Circuit current 2	I _{CC2}	—	4.2	—	mA	—
〈Power save〉						
ON voltage range	V _{PSON}	—	—	1.0	V	Standby mode
OFF voltage range	V _{PSOFF}	2.5	—	—	V	—
〈Hall bias〉						
Hall bias voltage	V _{HB}	—	0.9	1.5	V	I _{HB} =10mA
〈Hall amplifier〉						
Input bias current	I _{HA}	—	0.0	—	μA	—
Common phase input voltage	V _{HAR}	1.5	—	4.0	V	—
Minimum input level	V _{INH}	50	—	—	mV _{P-P}	—
Hall hysteresis level	V _{HYS}	—	20	—	mV	—
〈Torque command〉						
Input voltage	E _C , E _{CR}	0.5	—	3.3	V	—
Offset voltage (+)	E _{cof+}	20	50	80	mV	—
Offset voltage (—)	E _{cof—}	—80	—50	—20	mV	—
Input current	E _{CIN}	—3.0	—1.0	—	μA	E _C =E _{CR} =1.65V
PWM high level control range	V _{PWMH}	—	E _{CR} +1	—	V	E _{CR} =1.65V
PWM low level control range	V _{PWML}	—	E _{CR} —1	—	V	E _{CR} =1.65V
〈Brake mode switching〉						
ON voltage range	V _{MODE1ON}	2.5	—	—	V	Short brake
OFF voltage range	V _{MODE1OFF}	—	—	1.0	V	Reverse rotation brake
〈Output〉						
Output on resistance	R _{ON}	—	0.7	—	Ω	I _o =±600mA
Output limit voltage	V _{TL}	—	0.2	—	V	With R _{NF} =0.33Ω
〈OSC oscillator〉						
Output high level voltage	V _{HPOSC}	—	2.0	—	V	—
Output low level voltage	V _{LPOSC}	—	1.0	—	V	—
Oscillation frequency (reference value)	F _{OSC}	—	100	—	kHz	With C = 470pF
〈Voltage booster〉						
Charge pump output voltage	V _{PUMP}	—	10	—	V	With V _M = V _{CC} = 5V
〈FG output switching〉						
ON voltage range	V _{MODE2ON}	2.5	—	—	V	Single-phase output
OFF voltage range	V _{MODE2OFF}	—	—	1.0	V	Three-phase composite output

Parameter	Symbol	Min.	Typ.	Max.	Unit	Coniditions
〈FG output〉						
Output high level voltage	V _{FGH}	4.6	—	—	V	I _{FG} =−100 μA
Output low level voltage	V _{FGL}	—	—	0.4	V	I _{FG} =100 μA
〈FR output〉						
Output high level voltage	V _{FRH}	4.6	—	—	V	I _{FR} =−100 μA
Output low level voltage	V _{FRL}	—	—	0.4	V	I _{FR} =100 μA
〈CP1 output〉						
High level saturation voltage	V _{CP1H}	—	0.5	—	V	I _{CP1} =−7mA
Low level saturation voltage	V _{CP1L}	—	0.5	—	V	I _{CP1} =7mA
〈CP2 output〉						
High level saturation voltage	V _{CP2H}	—	0.5	—	V	I _{FR} =−7mA
Low level saturation voltage	V _{CP2L}	—	0.5	—	V	I _{FR} =7mA

●Application example

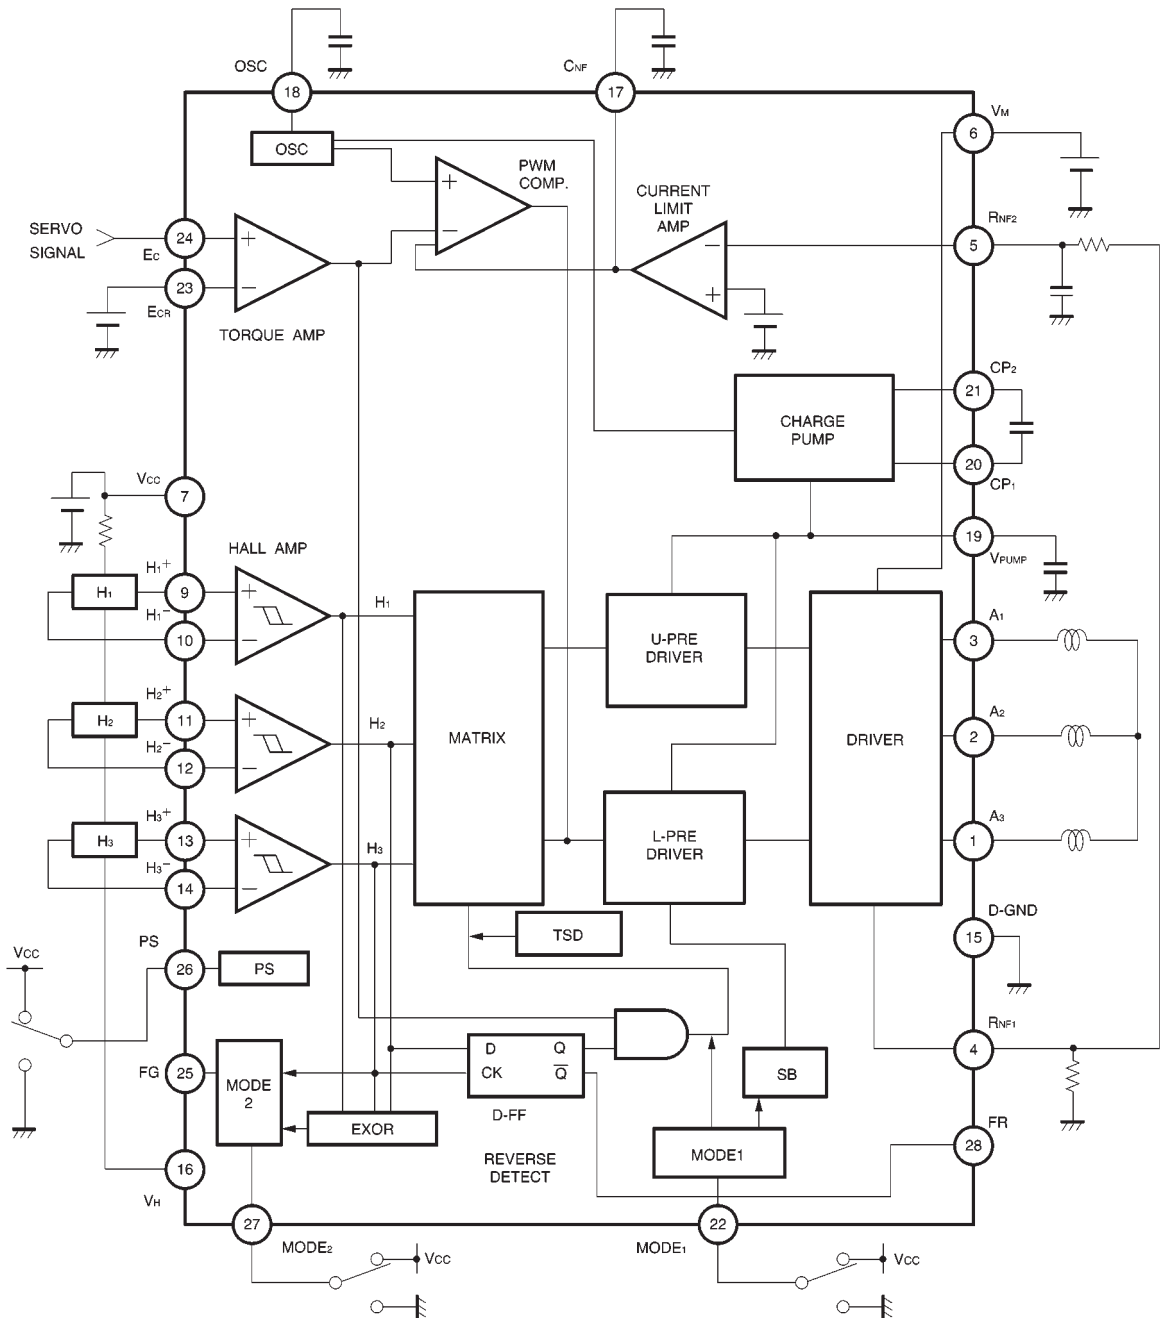


Fig.9

● Operation notes

(1) Brake mode (MODE1) logic

The brake mode is switched by MODE1 pin and the operation is shown in Table-1 below.

MODE1	Operation
L	Reverse rotation brake
H	Short brake

(When $E_c > E_{cR}$)

(2) MODE2 logic

The FG output is switched by MODE2 pin and the operation is shown in Table-2 below.

MODE2	FG output
L	3-phase composite output
H	1-phase output

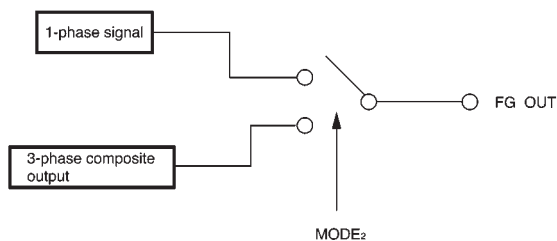


Fig.10

(3) PWM operation

By the voltage potential difference between E_c and E_{cR} , the ON duty when switching the low level output transistor changes as shown in Fig. 11 below. ($E_{cR} = 1.65V$)

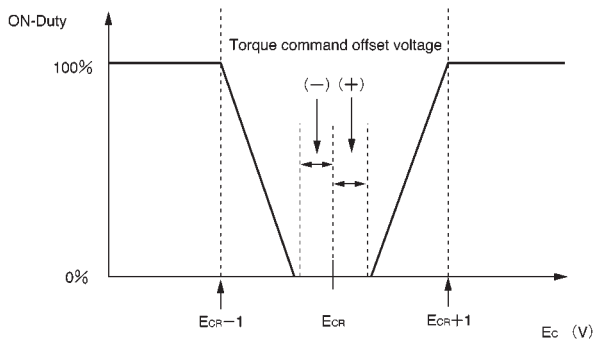


Fig.11

(4) Current limiter operation

When the R_{NF} voltage becomes 0.2V (Typ.), the current limiter circuit activates and limits the PWM ON duty. At this time the output current I_{max} is limited to:

$$I_{max} \approx \text{approx. } 0.2 / R_{NF}$$

(5) OSC oscillator circuit

By connecting a capacitor to the OSC pin, the charging and discharging of the capacitor generates a triangular wave as that shown in Fig. 12. (C = 470pF and f = 100kHz (Typ.))

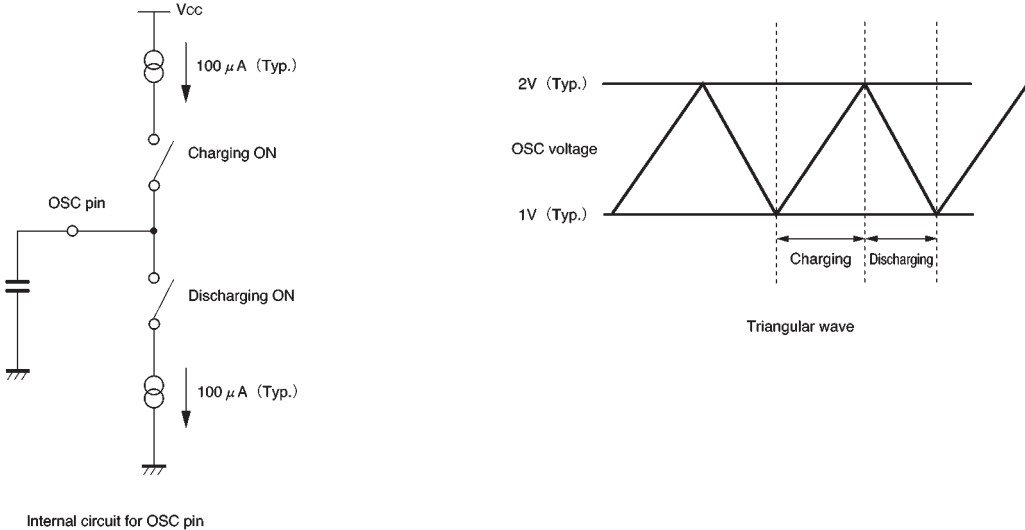


Fig.12

(6) Charge pump

The boost voltage (V_{PUMP}) is $V_M + V_{CC}$. Therefore, to prevent ($V_M + V_{CC}$) from increasing much over ratings, set the V_M and V_{CC} voltages.

(7) Timing chart


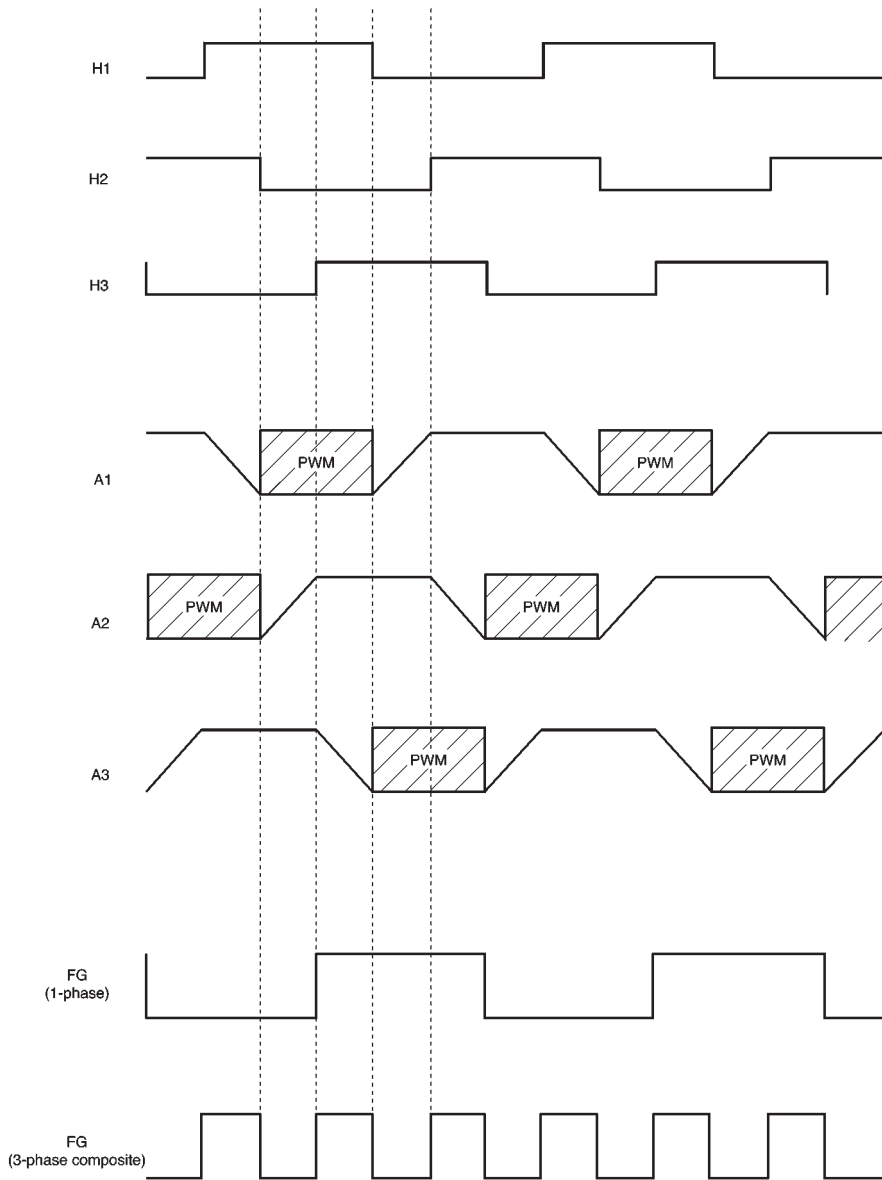


Fig.13

● External dimensions (Units: mm)

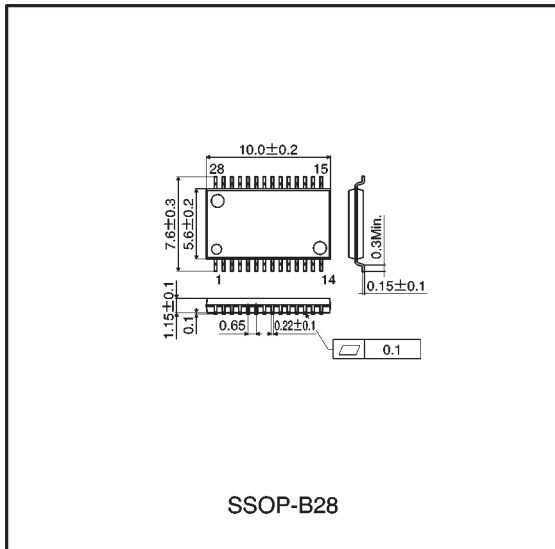

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.