


MECHANICAL DATA

Dimensions in mm (inches)

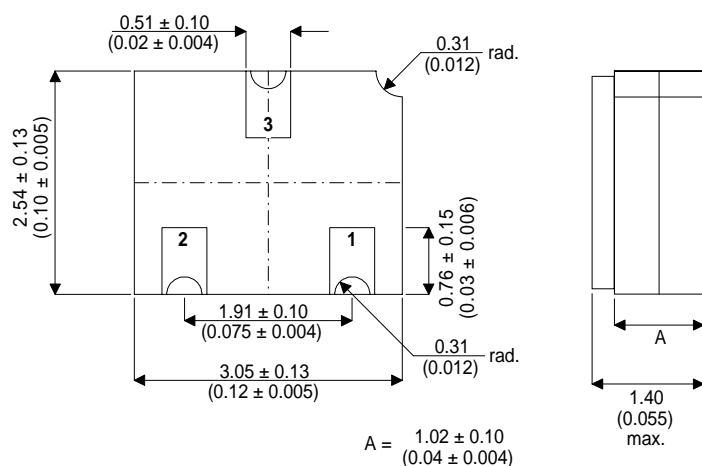

**HIGH SPEED
MEDIUM POWER
PNP SWITCHING TRANSISTOR**

FEATURES

- Hermetic Surface Mount Package (SOT23 Compatible)
- CECC Screening Options available

LCC1

Underside View

PAD 1 – Base PAD 2 – Emitter PAD 3 – Collector

ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ unless otherwise stated)		BCY70	BCY71	BCY72
V_{CBO}	Collector - Base Voltage ($I_E = 0$)	-50V	-45V	-25V
V_{CEO}	Collector - Emitter Voltage ($I_B = 0$)	-40V	-45V	-25V
V_{EBO}	Emitter - Base Voltage ($I_C = 0$)		-5V	
I_{CM}	Collector Peak Current		-200mA	
P_{tot}	Total Power Dissipation @ $T_{amb} < 25^\circ\text{C}$		350mW	
T_J, T_{STG}	Operating and Storage Junction Temperature Range		-65 to +200°C	

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise stated)

Parameter	Test Conditions	Min.	Typ.	Max.	Unit	
I_{CES} Collector Cut-off Current ($V_{BE} = 0$)	$V_{CE} = -20\text{V}$ $V_{CE} = -50\text{V}$ BCY70			-10 -500	nA	
	$V_{CE} = -20\text{V}$ $V_{CE} = -45\text{V}$ BCY71			-100 -10	nA μA	
	$V_{CE} = -20\text{V}$ $V_{CE} = -25\text{V}$ BCY72			-100 -10	nA μA	
	$V_{EB} = -5\text{V}$			-10	μA	
I_{EBO} Emitter Cutoff Current ($I_C = 0$)	$V_{EB} = -5\text{V}$			-10	μA	
$V_{CE(sat)}^*$ Collector – Emitter Saturation Voltage	$I_C = -10\text{mA}$ $I_B = -1\text{mA}$ $I_C = -50\text{mA}$ $I_B = -5\text{mA}$			-0.25 -0.5	V	
$V_{BE(sat)}^*$ Base – Emitter Saturation Voltage	$I_C = -10\text{mA}$ $I_B = -1\text{mA}$ BCY70 AND BCY71 ONLY $I_C = -50\text{mA}$ $I_B = -5\text{mA}$	-0.6		-0.9 -1.2	V	
h_{FE}^* DC Current Gain	BCY70 $I_C = -0.1\text{mA}$ $V_{CE} = -1\text{V}$ $I_C = -1\text{mA}$ $V_{CE} = -1\text{V}$ $I_C = -10\text{mA}$ $V_{CE} = -1\text{V}$ $I_C = -50\text{mA}$ $V_{CE} = -1\text{V}$	40 45 50 15				
	BCY71 $I_C = -0.01\text{mA}$ $V_{CE} = -1\text{V}$ $I_C = -0.1\text{mA}$ $V_{CE} = -1\text{V}$ $I_C = -1\text{mA}$ $V_{CE} = -1\text{V}$ $I_C = -10\text{mA}$ $V_{CE} = 1\text{V}$ $I_C = -50\text{mA}$ $V_{CE} = -1\text{V}$	80 90 100 15	60		600	—
	BCY72 $I_C = -1\text{mA}$ $V_{CE} = -1\text{V}$ $I_C = -10\text{mA}$ $V_{CE} = -1\text{V}$	40 50				
	h_{fe} Small Signal Current	$I_C = -1\text{mA}$ $V_{CE} = -10\text{V}$ $f = 1\text{KHz}$	100		400	—
	f_T Transition Frequency	$I_C = -0.1\text{mA}$ $V_{CE} = -20\text{V}$ $f = 10.7\text{MHz}$ BCY71	15			MHz
		$I_C = -10\text{mA}$ $V_{CE} = -20\text{V}$ $f = 100\text{MHz}$ BCY70	250			
		BCY71 and BCY72	200			
	C_{EBO} Emitter-Base Capacitance	$I_C = 0$ $V_{EB} = -1\text{V}$ $f = 1\text{MHz}$			8	pF
	C_{CBO} Collector-Base Capacitance	$I_E = 0$ $V_{CB} = -10\text{V}$ $f = 1\text{MHz}$			6	

ELECTRICAL CHARACTERISTICS continued ($T_A = 25^\circ\text{C}$ unless otherwise stated)

Parameter	Test Conditions	Min.	Typ.	Max.	Unit
NF Noise Figure	$I_C = -0.1\text{mA}$ $V_{CE} = -5\text{V}$ $R_g = 2\text{K}\Omega$ $f = 10$ to 10000 Hz BCY70 AND BCY71 BCY70			6 2	dB
h_{ie} Input Impedance	$I_C = -1\text{mA}$ $V_{CE} = -10\text{V}$ $f = 1\text{kHz}$ BCY71 ONLY	2		12	$\text{K}\Omega$
h_{re} Reverse Voltage Ratio	$I_C = -1\text{mA}$ $V_{CE} = -10\text{V}$ $f = 1\text{kHz}$ BCY71 ONLY			20×10^{-4}	—
h_{oe} Output Admittance	$I_C = -1\text{mA}$ $V_{CE} = -10\text{V}$ $f = 1\text{kHz}$ BCY71 ONLY	10		60	μS
t_d Delay Time	$I_C = -10\text{mA}$ $V_{EE} = 3\text{V}$ $I_{B1} = -1\text{mA}$ BCY70 AND BCY72 ONLY		23	35	ns
t_r Rise Time	$I_C = -10\text{mA}$ $V_{EE} = 3\text{V}$ $I_{B1} = -1\text{mA}$ BCY70 AND BCY72 ONLY		25	35	ns
t_s Storage Time	$I_C = -10\text{mA}$ $V_{EE} = 3\text{V}$ $I_{B1} = -I_{B2} = -1\text{mA}$ BCY70 AND BCY72 ONLY		270	350	ns
t_f Fall Time	$I_C = -10\text{mA}$ $V_{EE} = 3\text{V}$ $I_{B1} = -I_{B2} = -1\text{mA}$ BCY70 AND BCY72 ONLY		50	80	ns
t_{on} Turn-on Time	$I_C = -10\text{mA}$ $V_{EE} = 3\text{V}$ $I_{B1} = -1\text{mA}$ BCY70 AND BCY72 ONLY		48	65	ns
t_{off} Turn-Off Time	$I_C = -10\text{mA}$ $V_{EE} = 3\text{V}$ $I_{B1} = -I_{B2} = -1\text{mA}$ BCY70 AND BCY72 ONLY		320	420	ns

NOTES:

* Pulse test: $t_p \leq 300\mu\text{s}$, $\delta \leq 1\%$



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.