


PNP Silicon AF Transistor

- For AF driver and output stages
- High collector current
- Low collector-emitter saturation voltage
- Complementary types: BCP 54M...BCP 56M(NPN)

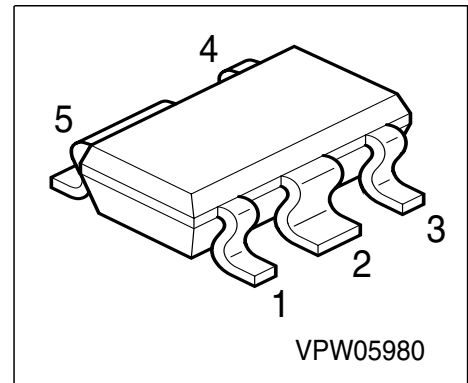

Type	Marking	Pin Configuration					Package
BCP 51M	AAAs	1 = B	2 = C	3 = E	4=n.c.	5 = C	SCT-595
BCP 52M	AEs	1 = B	2 = C	3 = E	4=n.c.	5 = C	SCT-595
BCP 53M	AHs	1 = B	2 = C	3 = E	4=n.c.	5 = C	SCT-595

Maximum Ratings

Parameter	Symbol	BCP 51M	BCP 52M	BCP 53M	Unit
Collector-emitter voltage	V_{CEO}	45	60	80	V
Collector-base voltage	V_{CBO}	45	60	100	
Emitter-base voltage	V_{EBO}	5	5	5	
DC collector current	I_C	1			A
Peak collector current	I_{CM}	1.5			
Base current	I_B	100			mA
Peak base current	I_{BM}	200			
Total power dissipation, $T_S \leq 77 \text{ }^\circ\text{C}$	P_{tot}	1.7			W
Junction temperature	T_j	150			$^\circ\text{C}$
Storage temperature	T_{stg}	-65 ... 150			

Thermal Resistance

Junction ambient 1)	R_{thJA}	≤ 98	K/W
Junction - soldering point	R_{thJS}	≤ 43	

1) Package mounted on pcb 40mm x 40mm x 1.5mm / 6cm² Cu


Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified.

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
DC Characteristics					
Collector-emitter breakdown voltage $I_C = 10\text{ mA}, I_B = 0$	$V_{(BR)CEO}$				V
BCP 51M		45	-	-	
BCP 52M		60	-	-	
BCP 53M		80	-	-	
Collector-base breakdown voltage $I_C = 100\ \mu\text{A}, I_B = 0$	$V_{(BR)CBO}$				
BCP 51M		45	-	-	
BCP 52M		60	-	-	
BCP 53M		100	-	-	
Emitter-base breakdown voltage $I_E = 10\ \mu\text{A}, I_C = 0$	$V_{(BR)EBO}$	5	-	-	
Collector cutoff current $V_{CB} = 30\text{ V}, I_E = 0$	I_{CBO}	-	-	100	nA
Collector cutoff current $V_{CB} = 30\text{ V}, I_E = 0, T_A = 150^\circ\text{C}$	I_{CBO}	-	-	20	μA
DC current gain 1) $I_C = 5\text{ mA}, V_{CE} = 2\text{ V}$	h_{FE}	25	-	-	-
DC current gain 1) $I_C = 150\text{ mA}, V_{CE} = 2\text{ V}$	h_{FE}	40	-	250	-
DC current gain 1) $I_C = 500\text{ mA}, V_{CE} = 2\text{ V}$	h_{FE}	25	-	-	-
Collector-emitter saturation voltage 1) $I_C = 500\text{ mA}, I_B = 50\text{ mA}$	V_{CEsat}	-	-	0.5	V
Base-emitter voltage 1) $I_C = 500\text{ mA}, V_{CE} = 2\text{ V}$	$V_{BE(ON)}$	-	-	1	
AC Characteristics					
Transition frequency $I_C = 50\text{ mA}, V_{CE} = 10\text{ V}, f = 100\text{ MHz}$	f_T	-	100	-	MHz

 1) Pulse test: $t \leq 300\ \mu\text{s}$, $D = 2\%$


Total power dissipation $P_{tot} = f(T_A^*; T_S)$

* Package mounted on epoxy

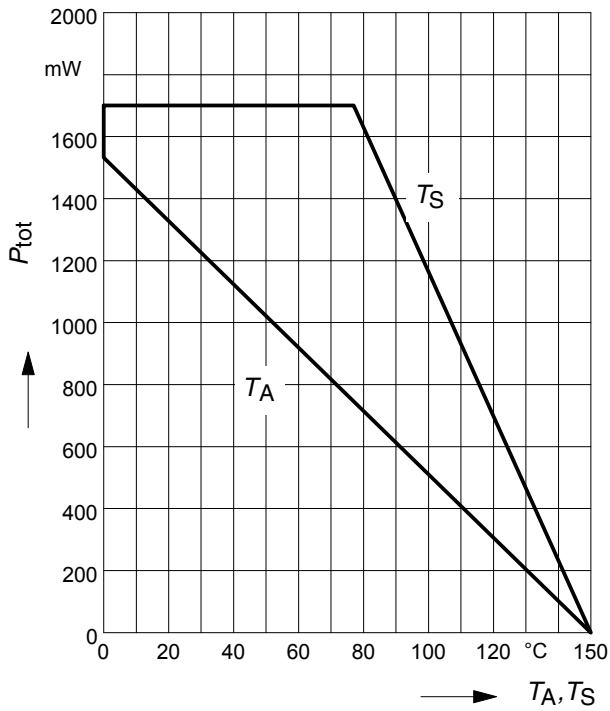


DC current gain $h_{FE} = f(I_C)$

$V_{CE} = 2V$

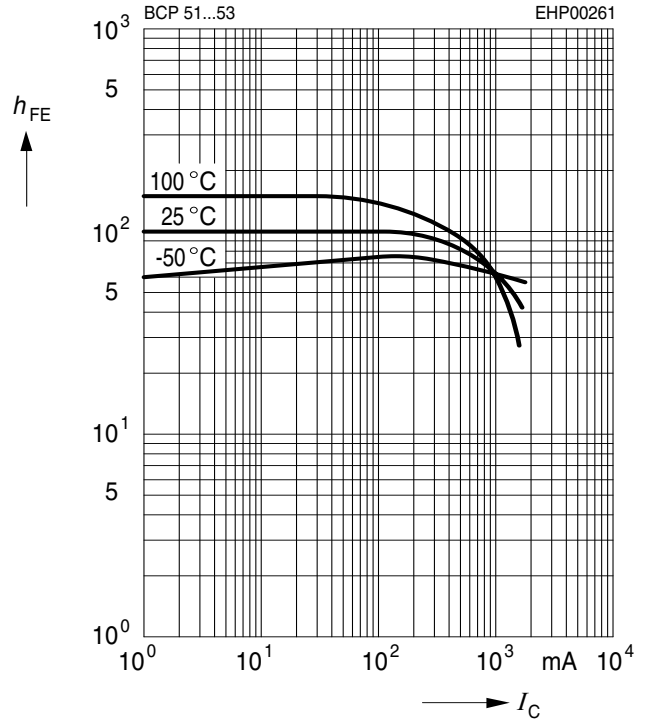


Permissible Pulse Load $R_{thJS} = f(t_p)$

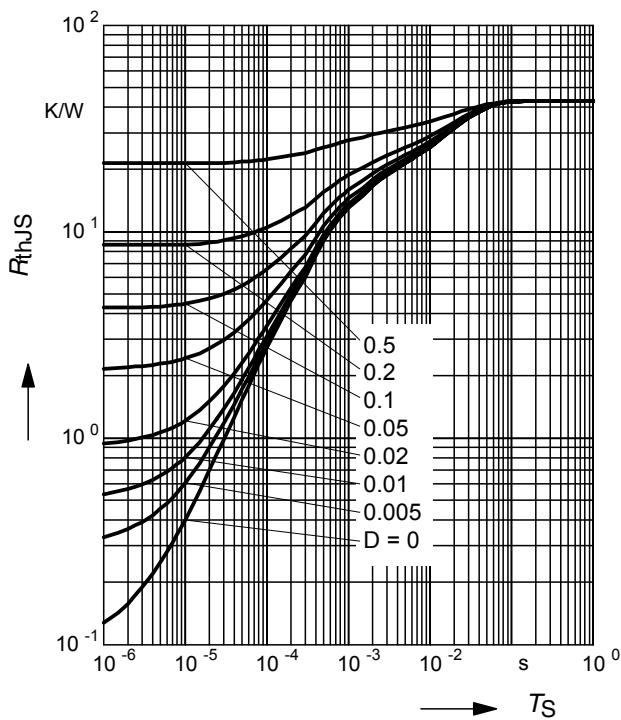


Permissible Pulse Load

$P_{totmax} / P_{totDC} = f(t_p)$

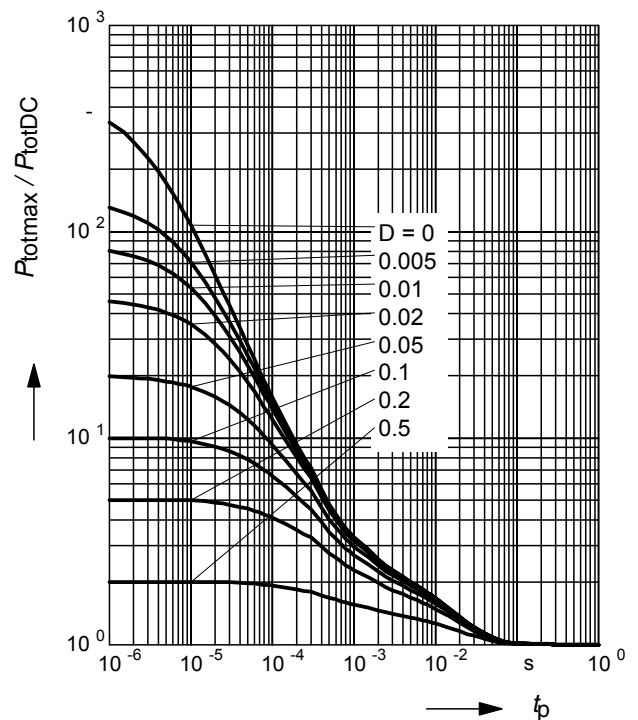


Collector cutoff current $I_{CBO} = f(T_A)$

$V_{CB} = 30V$

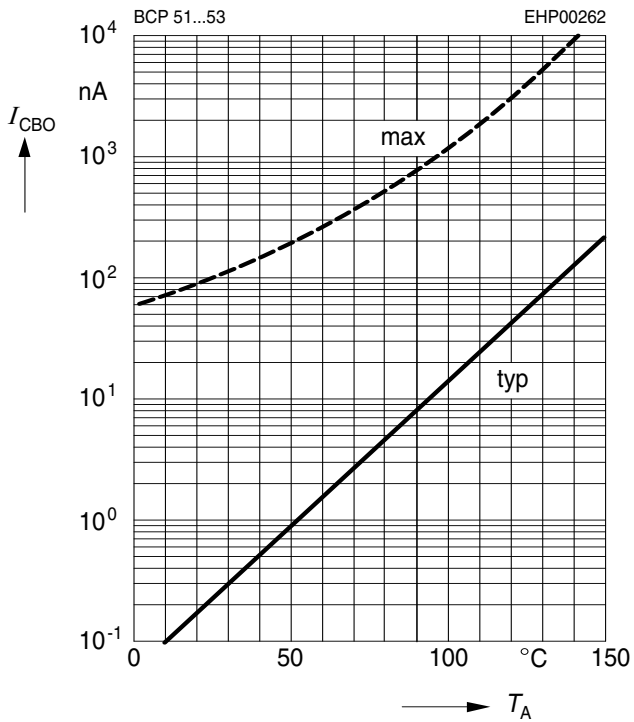


Transition frequency $f_T = f(I_C)$

$V_{CE} = 10 V$

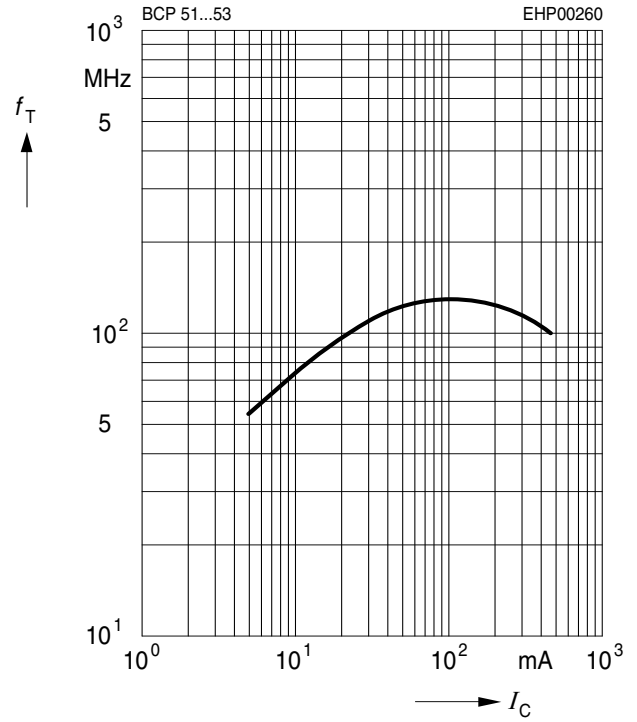


Base-emitter saturation voltage

$I_C = f(V_{BEsat}), h_{FE} = 10$

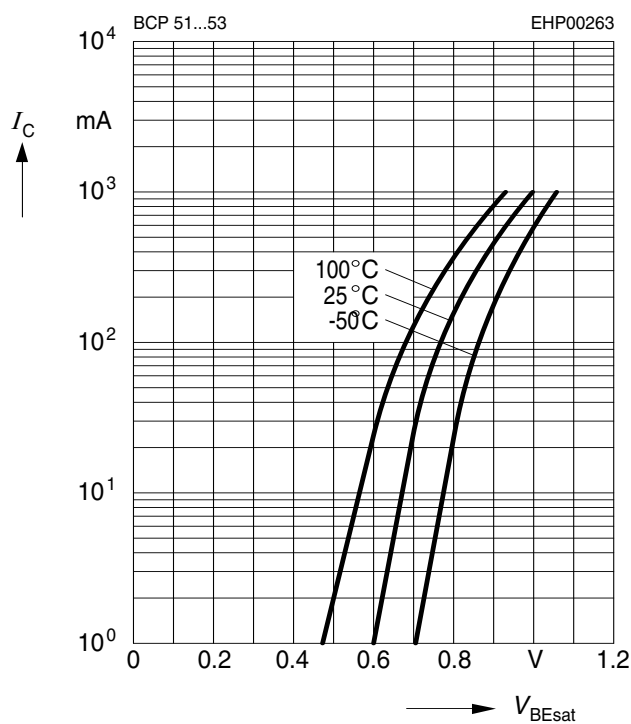

Collector-emitter saturation voltage

$I_C = f(V_{CEsat}), h_{FE} = 10$

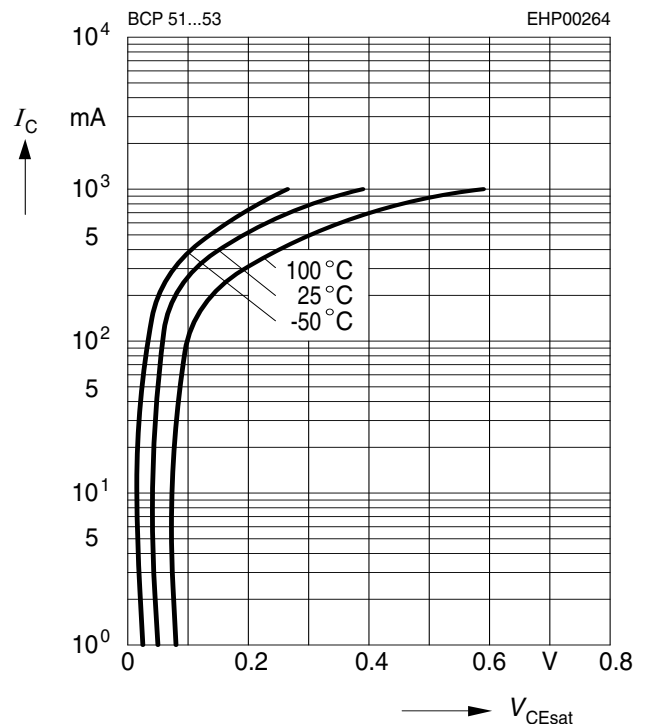



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.