



Amplifier Transistors

PNP Silicon

BC161-16



CASE 79-04, STYLE 1
TO-39 (TO-205AD)

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector–Emitter Voltage	V_{CEO}	–60	Vdc
Collector–Base Voltage	V_{CBO}	–60	Vdc
Emitter–Base Voltage	V_{EBO}	–5.0	Vdc
Collector Current — Continuous	I_C	–1.0	Adc
Total Device Dissipation @ $T_A = 25^\circ\text{C}$ Derate above 25°C	P_D	0.8 4.6	Watts mW/ $^\circ\text{C}$
Total Device Dissipation @ $T_C = 25^\circ\text{C}$ Derate above 25°C	P_D	3.7 20	Watts mW/ $^\circ\text{C}$
Operating and Storage Junction Temperature Range	T_J, T_{stg}	–65 to +200	$^\circ\text{C}$

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	219	$^\circ\text{C}/\text{W}$
Thermal Resistance, Junction to Case	$R_{\theta JC}$	50	$^\circ\text{C}/\text{W}$

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
----------------	--------	-----	-----	------

OFF CHARACTERISTICS

Collector Cutoff Current ($I_E = 0, V_{CES} = -60 \text{ Vdc}$) ($I_E = 0, V_{CES} = -60 \text{ Vdc}, T_{Amb} = 150^\circ\text{C}$)	I_{CES}	— —	–100 –100	nAdc μAdc
Collector–Emitter Breakdown Voltage ($I_C = -100 \mu\text{Adc}, I_E = 0$)	$V_{(BR)CES}$	–60	—	Vdc
Collector–Emitter Breakdown Voltage ⁽¹⁾ ($I_C = -10 \text{ mAdc}, I_B = 0$)	$V_{(BR)CEO}$	–60	—	Vdc
Emitter–Base Breakdown Voltage ($I_E = -100 \mu\text{Adc}, I_C = 0$)	$V_{(BR)EBO}$	–5.0	—	Vdc

1. Pulsed: Pulse Duration = 300 μs , Duty Cycle = 2.0%.

(Replaces BC160-16/D)

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted) (Continued)

Characteristic	Symbol	Min	Max	Unit
ON CHARACTERISTICS				
DC Current Gain ⁽¹⁾ ($I_C = -100\text{ mAdc}$, $V_{CE} = -1.0\text{ Vdc}$)	h_{FE}	100	250	—
Collector–Emitter Saturation Voltage ⁽¹⁾ ($I_C = -1.0\text{ Adc}$, $I_B = -0.1\text{ Adc}$)	$V_{CE(sat)}$	—	-1.0	Vdc
Base–Emitter Saturation Voltage ⁽¹⁾ ($I_C = -1.0\text{ Adc}$, $V_{CE} = -1.0\text{ Vdc}$)	$V_{BE(on)}$	—	-1.7	Vdc

SMALL–SIGNAL CHARACTERISTICS

Gain Bandwidth Product ($I_C = -50\text{ mAdc}$, $V_{CE} = -10\text{ Vdc}$, $f = 20\text{ MHz}$)	f_T	50	—	MHz
Input Capacitance ($V_{EB} = -10\text{ Vdc}$, $f = 1.0\text{ MHz}$)	C_{ib}	—	180	pF
Output Capacitance ($V_{CB} = -10\text{ Vdc}$, $I_E = 0$, $f = 1.0\text{ MHz}$)	C_{obo}	—	30	pF
Turn–On Time ($I_C = -100\text{ mAdc}$, $I_{B1} = -5.0\text{ }\mu\text{Adc}$)	t_{on}	—	500	ns
Turn–Off Time ($I_C = -100\text{ mAdc}$, $I_{B1} = I_{B2} = -5.0\text{ }\mu\text{Adc}$)	t_{off}	—	650	ns

1. Pulsed: Pulse Duration = 300 μs , Duty Cycle = 2.0%.

SWITCHING TIME EQUIVALENT TEST CIRCUITS

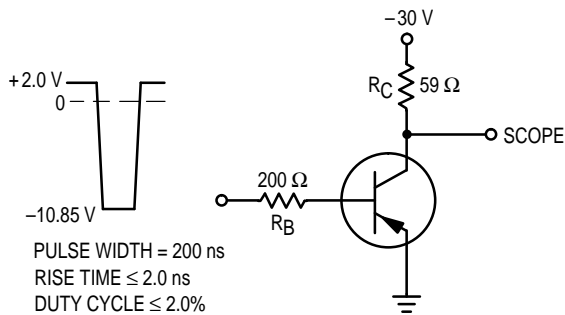


Figure 1. Turn–On

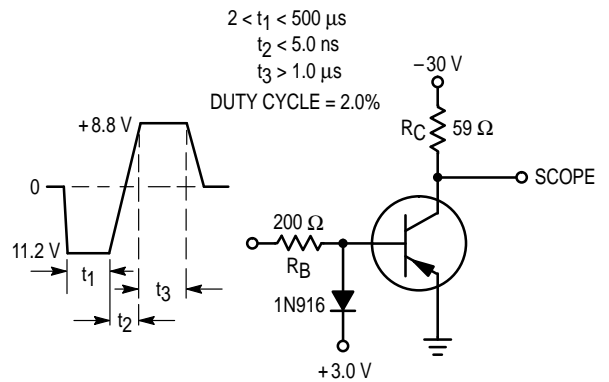


Figure 2. Turn–Off

TRANSIENT CHARACTERISTICS

25°C 100°C

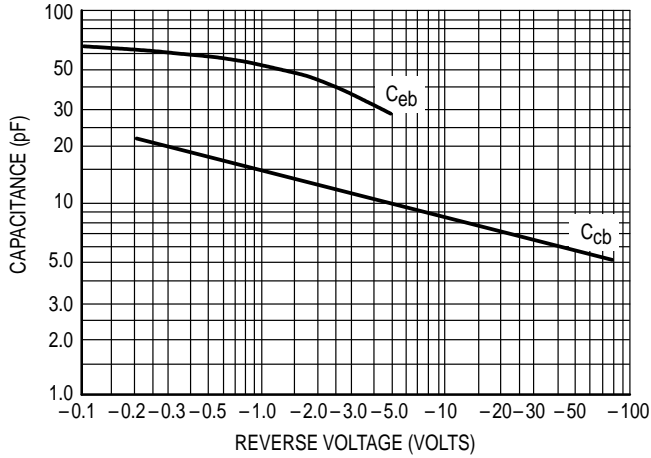


Figure 3. Capacitances

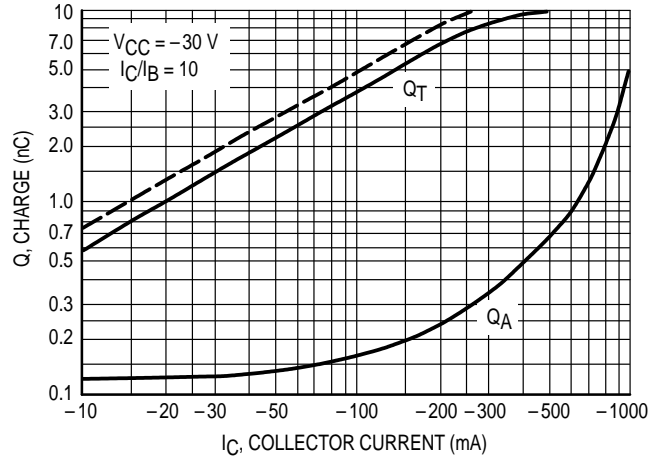


Figure 4. Charge Data

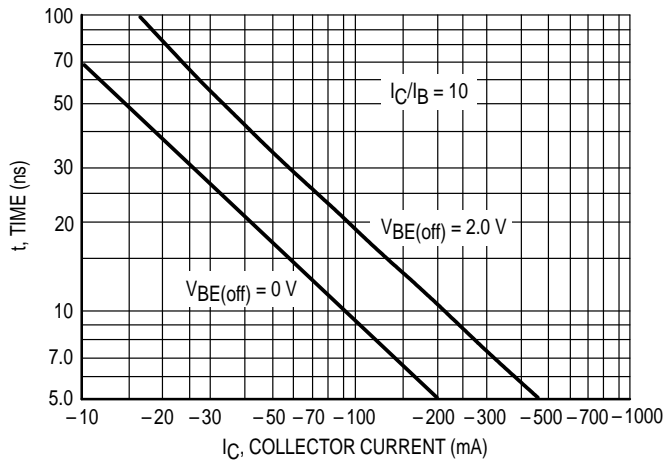


Figure 5. Delay Time

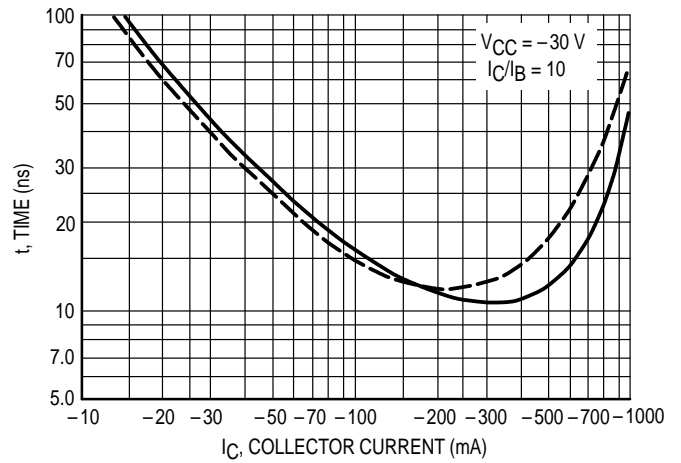


Figure 6. Rise Time

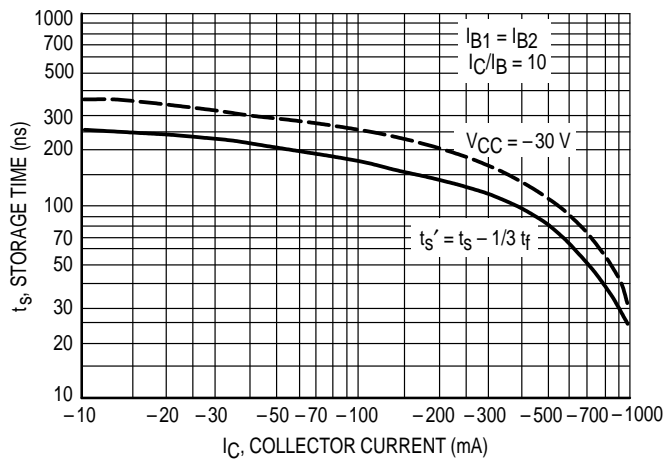


Figure 7. Storage Time

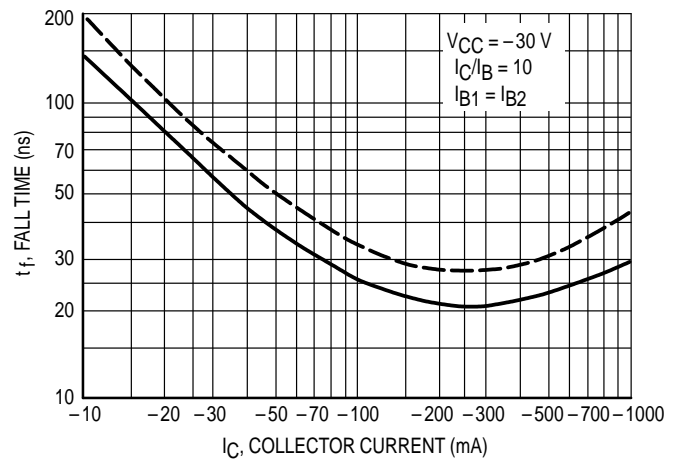


Figure 8. Fall Time

**SMALL-SIGNAL CHARACTERISTICS
NOISE FIGURE**

$V_{CE} = 10 \text{ Vdc}$, $T_A = 25^\circ\text{C}$

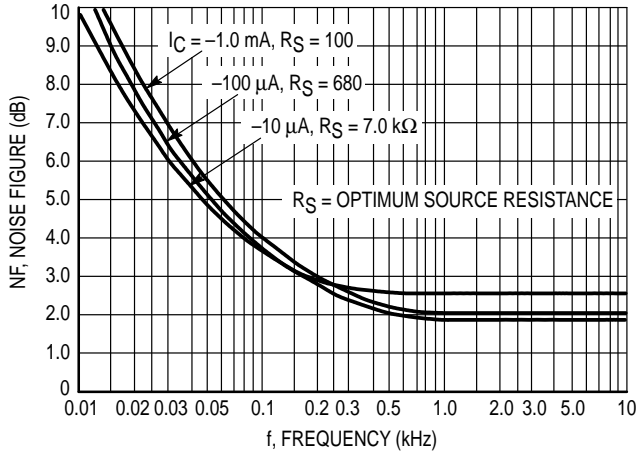


Figure 9. Frequency Effects

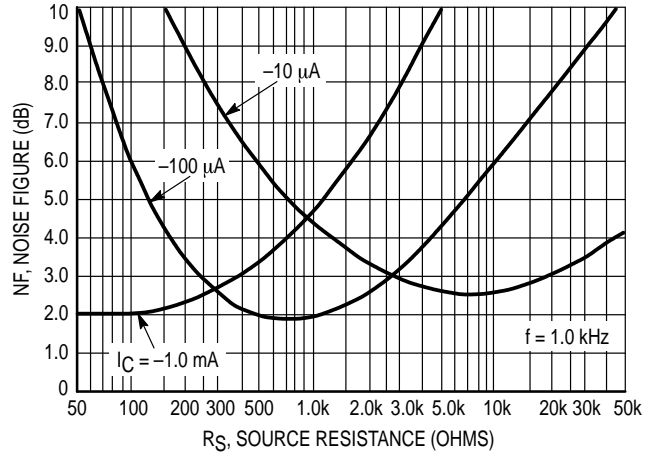


Figure 10. Source Resistance Effects

h PARAMETERS

$V_{CE} = 10 \text{ Vdc}$, $f = 1.0 \text{ kHz}$, $T_A = 25^\circ\text{C}$

This group of graphs illustrates the relationship of the "h" parameters for this series of transistors. To obtain these curves, 4 units were selected and identified by number - the same units were used to develop curves on each graph.

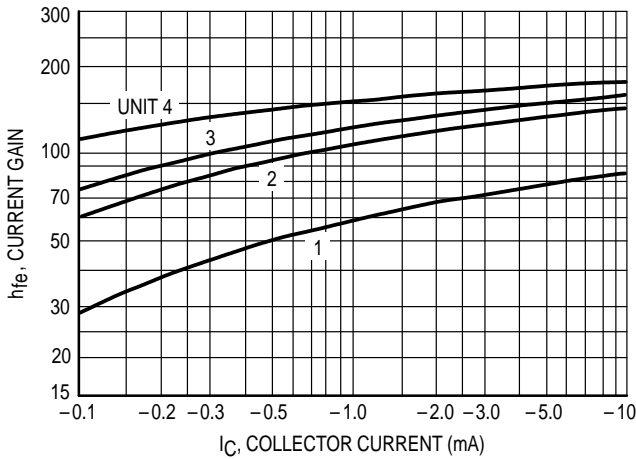


Figure 11. Current Gain

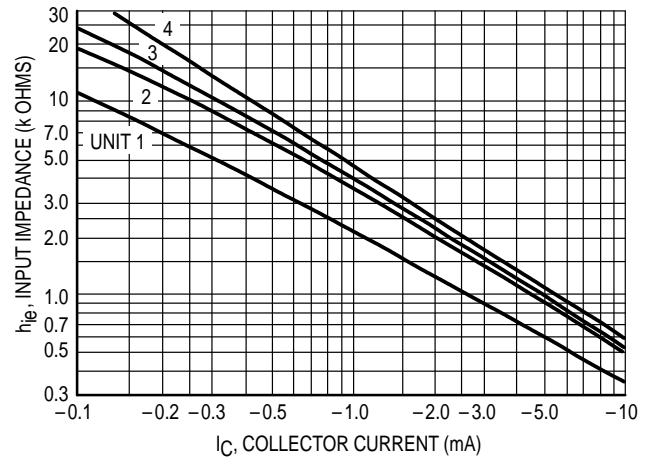


Figure 12. Input Impedance

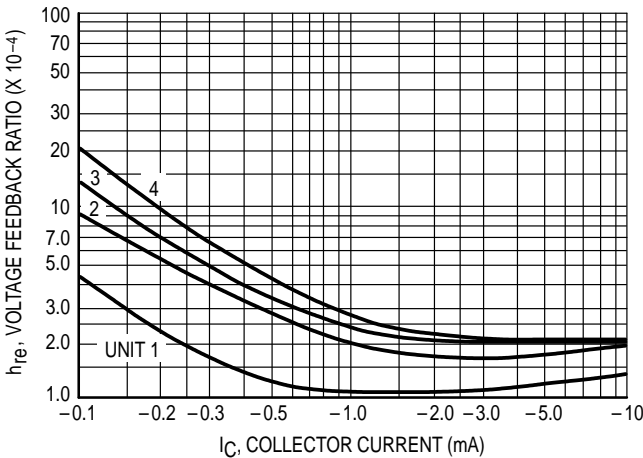


Figure 13. Voltage Feedback Ratio

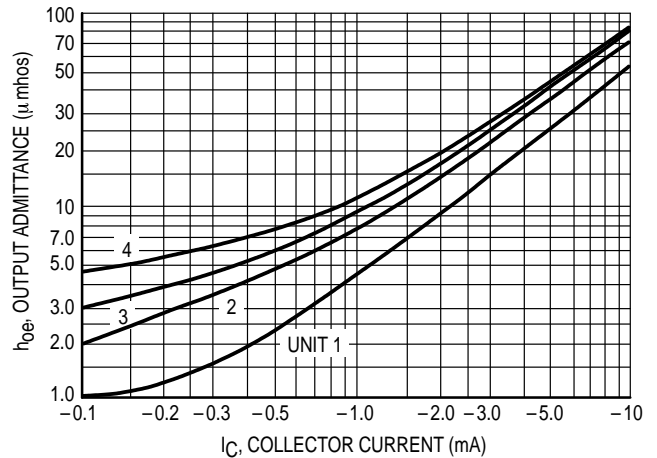


Figure 14. Output Admittance

STATIC CHARACTERISTICS

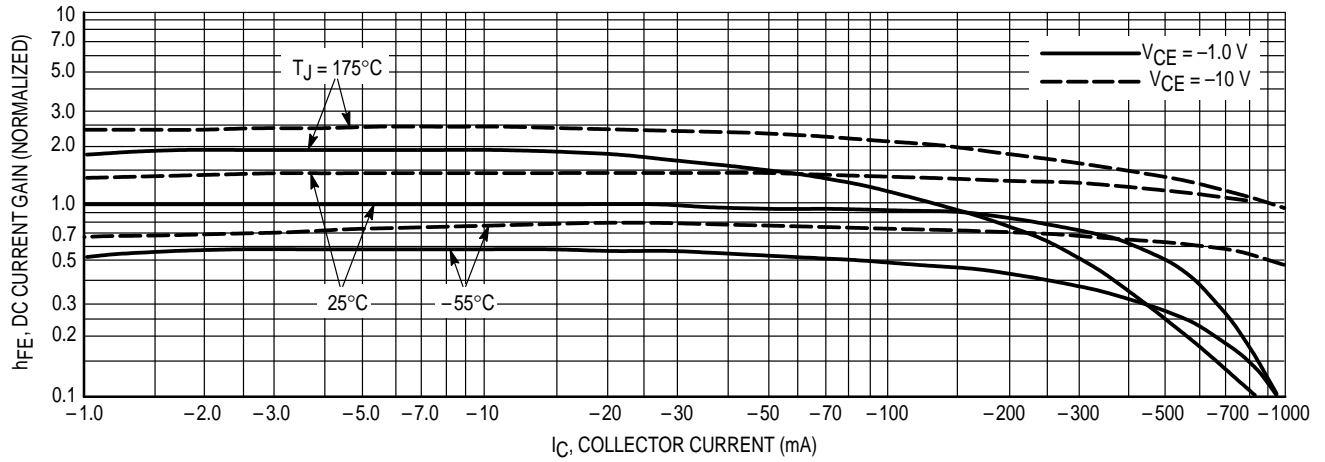


Figure 15. DC Current Gain

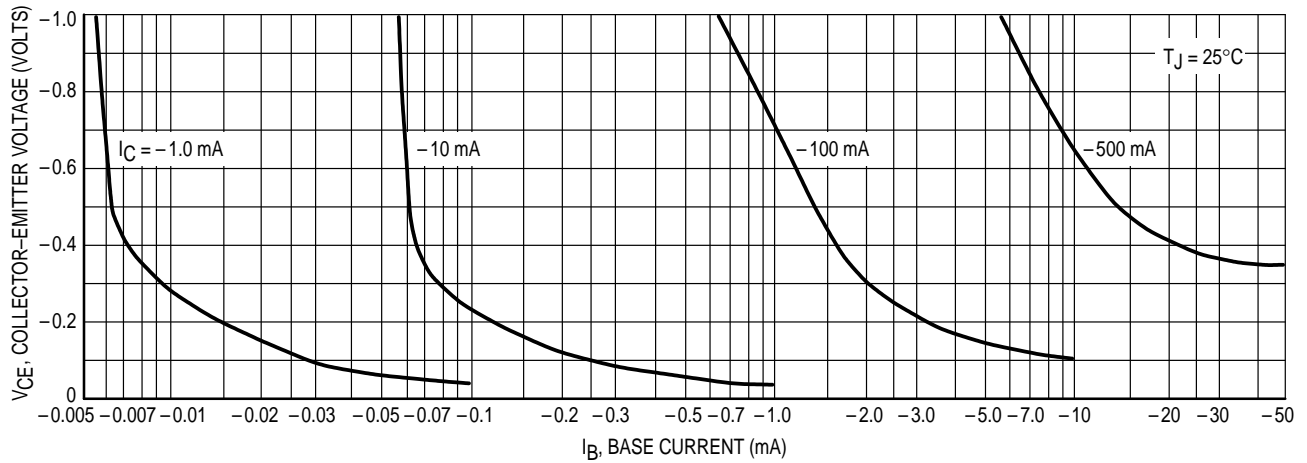


Figure 16. Collector Saturation Region

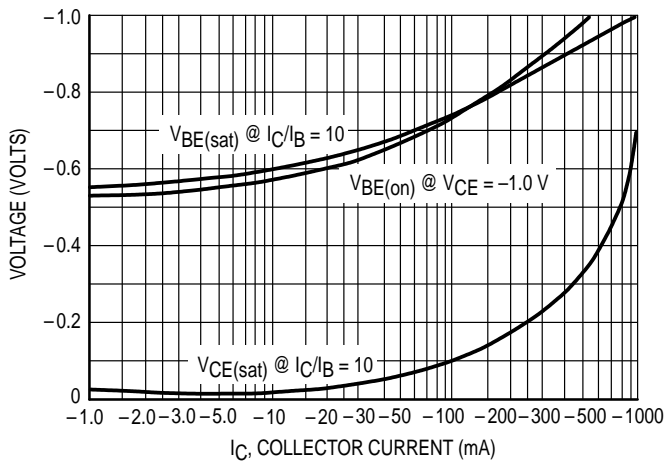


Figure 17. "On" Voltages


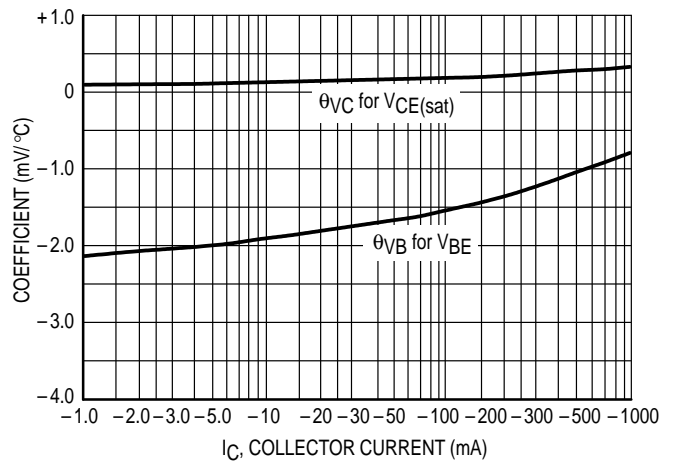


Figure 18. Temperature Coefficients

RATINGS AND THERMAL DATA

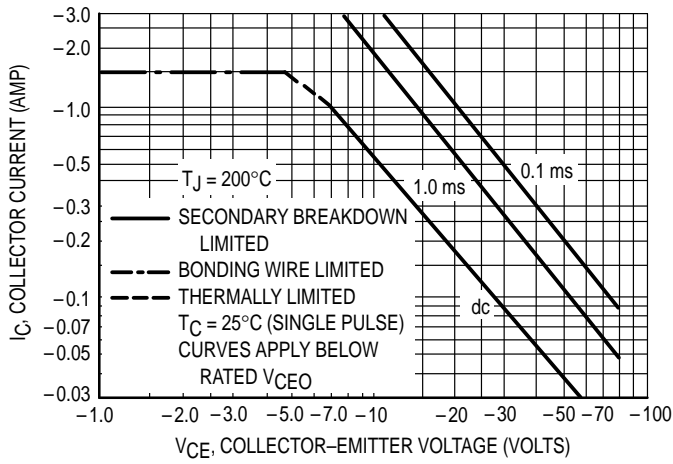


The safe operating area curves indicate I_C - V_{CE} limits of the transistor that must be observed for reliable operation. Collector load lines for specific circuits must fall below the limits indicated by the applicable curve.

The data of Figure 19 is based upon $T_{J(pk)} = 200^\circ\text{C}$; T_C is variable depending upon conditions. Pulse curves are valid for duty cycles to 10% provided $T_{J(pk)} \leq 200^\circ\text{C}$. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

Figure 19. Safe Operating Area

PACKAGE DIMENSIONS

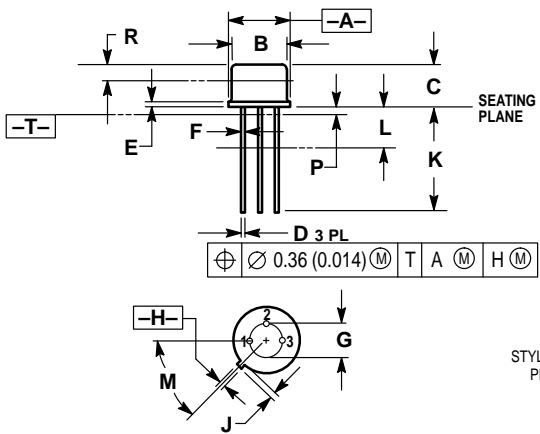


STYLE 1:
 PIN 1. EMITTER
 2. BASE
 3. COLLECTOR

**CASE 079-04
 (TO-205AD)
 ISSUE N**

- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
 2. CONTROLLING DIMENSION: INCH.
 3. DIMENSION J MEASURED FROM DIMENSION A MAXIMUM.
 4. DIMENSION B SHALL NOT VARY MORE THAN 0.25 (0.010) IN ZONE R. THIS ZONE CONTROLLED FOR AUTOMATIC HANDLING.
 5. DIMENSION F APPLIES BETWEEN DIMENSION P AND L. DIMENSION D APPLIES BETWEEN DIMENSION L AND K MINIMUM. LEAD DIAMETER IS UNCONTROLLED IN DIMENSION P AND BEYOND DIMENSION K MINIMUM.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.335	0.370	8.51	9.39
B	0.305	0.335	7.75	8.50
C	0.240	0.260	6.10	6.60
D	0.016	0.021	0.41	0.53
E	0.009	0.041	0.23	1.04
F	0.016	0.019	0.41	0.48
G	0.200 BSC		5.08 BSC	
H	0.028	0.034	0.72	0.86
J	0.029	0.045	0.74	1.14
K	0.500	0.750	12.70	19.05
L	0.250	—	6.35	—
M	45° BSC		45° BSC	
P	—	0.050	—	1.27
R	0.100	—	2.54	—

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters which may be provided in Motorola data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and  are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

Mfax is a trademark of Motorola, Inc.

How to reach us:

USA/EUROPE/Locations Not Listed: Motorola Literature Distribution;
P.O. Box 5405, Denver, Colorado 80217. 303-675-2140 or 1-800-441-2447

JAPAN: Nippon Motorola Ltd.; Tatsumi-SPD-JLDC, 6F Seibu-Butsuryu-Center,
3-14-2 Tatsumi Koto-Ku, Tokyo 135, Japan. 81-3-3521-8315

Mfax™: RMFAX0@email.sps.mot.com – TOUCHTONE 602-244-6609
– US & Canada ONLY 1-800-774-1848

ASIA/PACIFIC: Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park,
51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852-26629298

INTERNET: <http://motorola.com/sps>





LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.