

# AN8261

## Brushless Motor Driver

### ■ Overview


The AN8261 is a 3-phase full-wave brushless motor drive IC and optimum for driving the air conditioner fan motors, etc.

### ■ Features


- Operating supply voltage range :  $V_{CC}= 4.5$  to  $7V$
- 3-phase full-wave drive, external power transistor
- Built-in low-voltage protective circuit
- Built-in thermal protective comparator circuit
- Built-in Hall amplifiers with hysteresis

### ■ Applications

Driving the brushless motors such as air conditioner fan motors, etc.

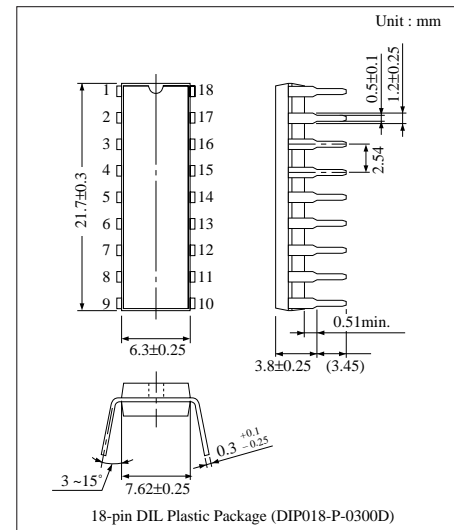

### ■ Block Diagram

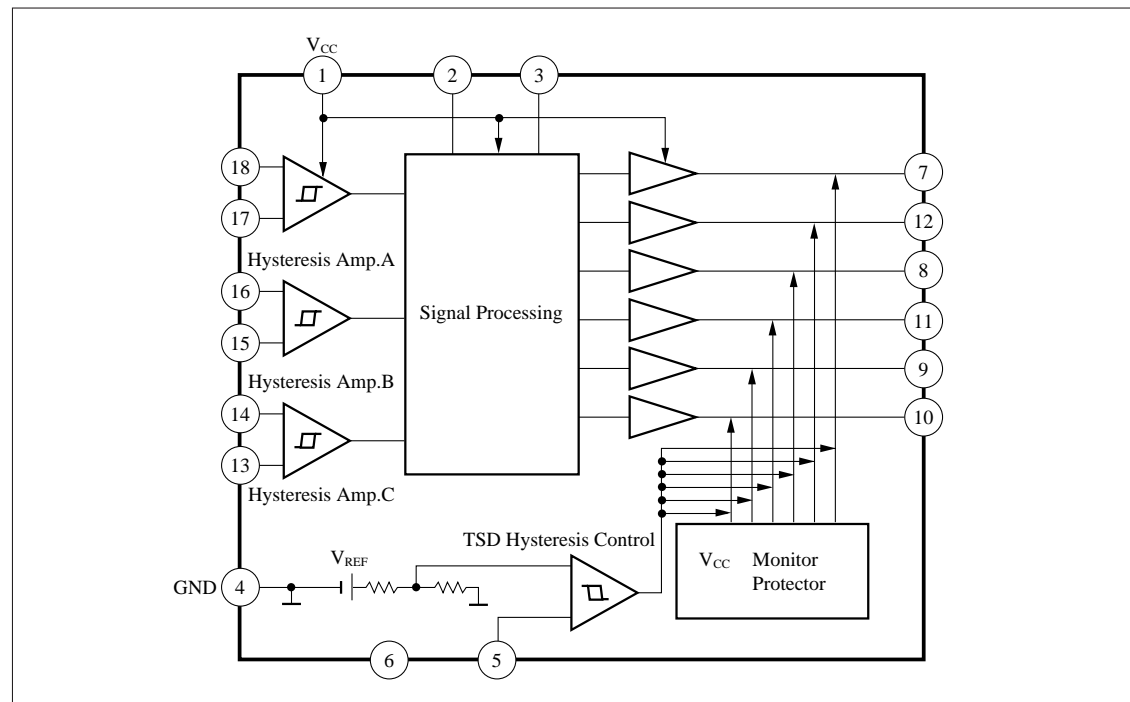

## ■ Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Unit
Supply voltage	V <sub>CC</sub>	7.5	V
Supply current	I <sub>CC</sub>	80	mA
Output drive current	I <sub>7, I<sub>8, I<sub>9</sub></sub> I<sub>10, I<sub>11, I<sub>12</sub></sub></sub></sub>	-7 to + 25	mA
Power dissipation	P <sub>D</sub>	800	mW
Operating ambient temperature	T <sub>opr</sub>	-20 to + 80	°C
Storage temperature	T <sub>stg</sub>	-55 to +150	°C


## ■ Recommended Operating Range (Ta=25°C)

Parameter	Symbol	Range
Operating supply voltage range	V <sub>CC</sub>	4.5V to 7V

## ■ Electrical Characteristics (Ta=25°C)

Parameter	Symbol	Condition	min	typ	max	Unit
Supply current 1	I <sub>CC1</sub>	V <sub>CC</sub> =5V	—	40	56	mA
Supply current 2	I <sub>CC2</sub>	V <sub>CC</sub> =3.5V	—	47	62	mA
Sensor amp. input voltage L to H	V <sub>SLH</sub>	V <sub>CC</sub> =5V	1	10	20	mV
Sensor amp. input voltage H to L	V <sub>SHL</sub>	V <sub>CC</sub> =5V	-20	-10	-1	mV
FG output voltage low level	V <sub>OL</sub>	V <sub>CC</sub> =5V, I <sub>PO</sub> =5mA	—	—	0.4	V
Power drive output voltage high level	V <sub>POH</sub>	V <sub>CC</sub> =5V, I <sub>PO</sub> =-3mA	3.6	—	—	V
Power drive output current high level	I <sub>POH</sub>	V <sub>CC</sub> =5V, V <sub>PO</sub> =2V	-8	-6	-4	mA
Power drive output voltage low level 1	V <sub>POL1</sub>	V <sub>CC</sub> =5V, I <sub>PO</sub> =10mA	—	—	0.4	V
Power drive output voltage low level 2	V <sub>POL2</sub>	V <sub>CC</sub> =5V, I <sub>PO</sub> =20mA	—	—	0.6	V
Power drive output voltage low level 3	V <sub>POL3</sub>	V <sub>CC</sub> =5V, I <sub>PO</sub> =15mA	—	—	0.6	V
Sensor amp. input voltage hysteresis width	V <sub>SW</sub>	V <sub>CC</sub> =5V	12	20	28	mV
FG output pull-up resistance value	R <sub>O</sub>	I <sub>W</sub> =30μA	8	10	12	kΩ
Protect reset voltage	V <sub>R</sub>		3.5	4	4.5	V
Temperature protect operating voltage	V <sub>T</sub>	V <sub>CC</sub> =5V	1	1.15	1.3	V
Temperature protect resetting voltage	V <sub>TR</sub>	V <sub>CC</sub> =5V	0.5	0.63	0.8	V
TSD bias current	I <sub>TSD</sub>	V <sub>CC</sub> =5V, V <sub>TSD</sub> =0.5V	—	—	10	μA
Reference voltage	V <sub>ref</sub>	V <sub>CC</sub> =5V	2	2.3	2.6	V
Reference voltage regulation	V <sub>refREGV</sub>	V <sub>CC</sub> =4V→7V	—	—	0.15	V
Reference voltage load regulation	V <sub>refREGV</sub>	V <sub>CC</sub> =5V, I <sub>O</sub> =0mA→10mA	—	—	0.1	V
V <sub>CC</sub> protect hysteresis width	V <sub>CCW</sub>		100	210	450	mV
Temperature protect operating voltage V <sub>ref</sub> ratio	V <sub>T</sub> /V <sub>ref</sub>	V <sub>CC</sub> =5V	48.5	50	51.5	%
Temperature protect operating voltage V <sub>R</sub> ratio	V <sub>R</sub> /V <sub>ref</sub>	V <sub>CC</sub> =5V	25.3	27.4	29.5	%

## Application Circuit

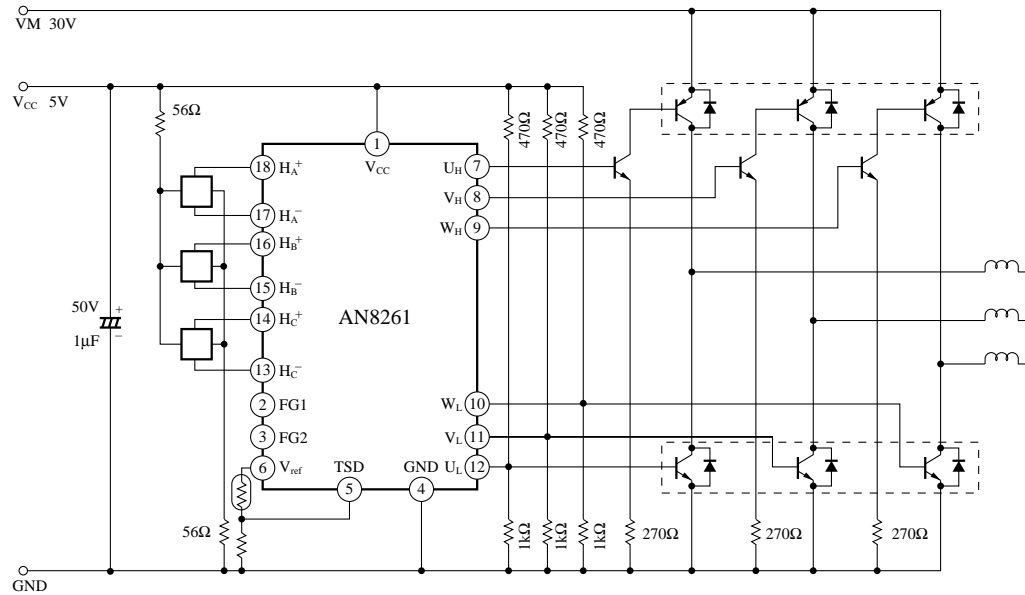

## Pin Descriptions

Pin No.	Pin name	Description	I/O	DC/waveform	Equivalent circuit
1	V <sub>CC</sub>	Supply voltage input pin	I	5V	—————
2	FG1	FG signal output pin	O		
3	FG2	FG signal output pin	O		
4	GND	GND pin	I	0V	—————
5	TSD	Temperature protect input signal pin	I	—	
6	V <sub>REF</sub>	Reference voltage output pin (TSD reference voltage)	O	2.3V	

## Pin Descriptions (cont.)

Pin No.	Pin name	Description	I/O	DC/waveform	Equivalent circuit
7	UH	Power driver output pin	O	—	
8	VH				
9	WH				
10	WL				
11	VL				
12	UL				
13	HC <sup>-</sup>	Hall element input pin	I	—	
14	HC <sup>+</sup>				
15	HB <sup>-</sup>				
16	HB <sup>+</sup>				
17	HA <sup>-</sup>				
18	HA <sup>+</sup>				

## Logic Diagram

Symbol		No.	1	2	3	4	5	6
		Pin No.						
Input	HA <sup>+</sup>	18	H	H	L	L	L	H
	HA <sup>-</sup>	17	L	L	H	H	H	L
	HB <sup>+</sup>	16	L	H	H	H	L	L
	HB <sup>-</sup>	15	H	L	L	L	H	H
	HC <sup>+</sup>	14	L	L	L	H	H	H
	HC <sup>-</sup>	13	H	H	H	L	L	L
Output	FG <sub>1</sub>	2	L	L	H	H	H	L
	FG <sub>2</sub>	3	L	H	L	H	L	H
	UH	7	L	L	H	H	L	L
	VH	8	L	L	L	L	H	H
	WH	9	H	H	L	L	L	L
	UL	12	H	L	L	L	L	H
	VL	11	L	H	H	L	L	L
WL	10	L	L	L	H	H	L	



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.