

AN8090, AN8090S

Overvoltage Protective Circuits Built-in Switching Power Supply


Overview

The AN8090 and the AN8090S enables high-speed control up to 500 kHz and have various protective functions for over-current, overvoltage, and thermal protection in order to improve reliability of the power supply.



Features

- 500 kHz PWM control frequency and miniaturized
- Capable of directly driving the large-capacity MOS FET
- Provided with 2-channel overcurrent protective function for positive side and negative side, and intermittent operating function as protection when an over-current state advanced further
- Provided with over-voltage protective and over-heat protective functions
- Provided with the ON/OFF function to start/stop operating the power supply with external signals and the error amplifier required for secondary control
- 16-DIP package for the AN8090 and SONF-20D for the AN8090S

Block Diagram

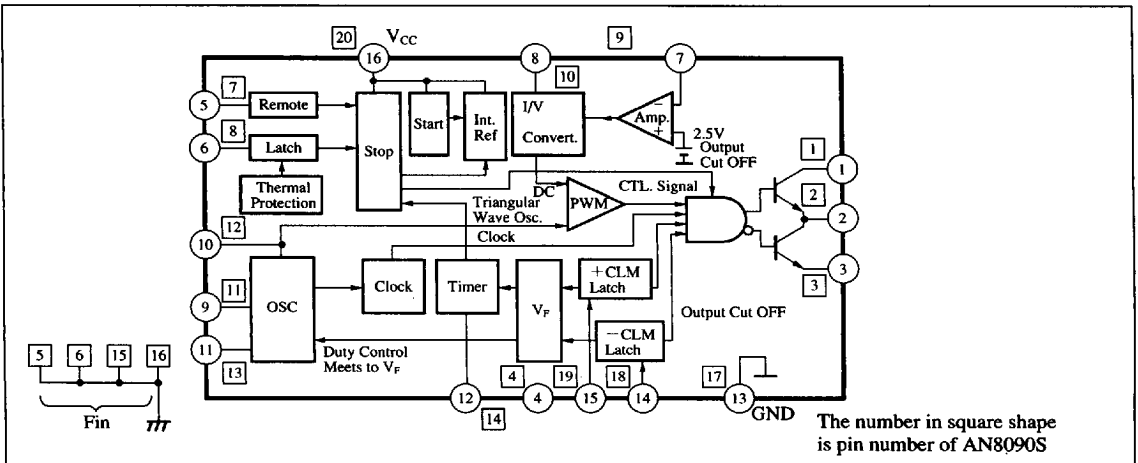

■ 6932852 0012772 171 ■

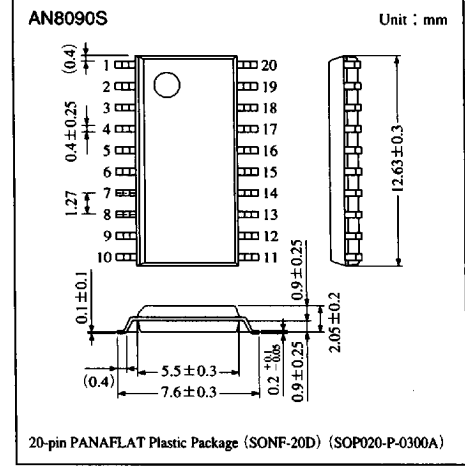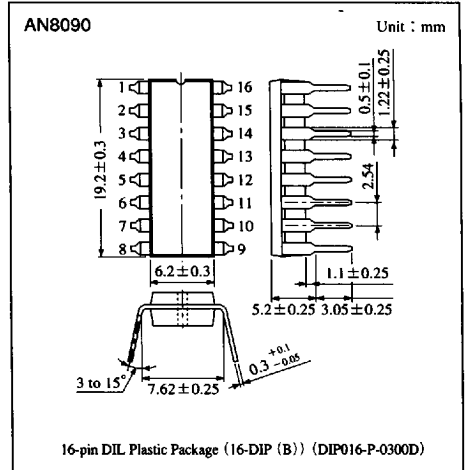

Voltage Regulators

■ Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Unit
Supply voltage	V _{CC}	35	V
Peak output current	I _{O(peak)}	±2	A
Maximum continuous output current	I _{O(max.)}	±0.15	A
Power dissipation	P _D	1.5 *	W
Operating ambient temperature	T _{opr}	-30 to +85	°C
Storage temperature	AN8090	-55 to +150	°C
	AN8090S	-40 to +125	

* For the AN8090S, Ta ≤ 25°C when mounting onto the glass epoxy substrate (substrate size = 5cm × 5cm × 0.45cm)

■ Recommended Operating Range (Ta=25°C)

Parameter	Symbol	Range
Operating supply voltage range	V _{CC}	Stop voltage to 34V

■ Electrical Characteristics (Ta=25°C)

Parameter	Symbol	Condition	min	typ	max	Unit
Operating voltage range	V _{CC}		—	—	34	V
Start voltage	V _{CC(start)}		15.2	16	17.2	V
Stop voltage	V _{CC(stop)}		9	10	10.9	V
Start/stop voltage difference	ΔV _{CC}	ΔV _{CC} = V _{CC(start)} - V _{CC(stop)}	5	6	7	V
Prestart circuit current	I _{CCL}	V _{CC} = 14.5V Ta = 25°C	50	80	120	μA
		V _{CC} = 14.5V -30°C ≤ Ta ≤ 85°C	40	80	160	μA
Circuit current	I _{CCO}	V _{CC} = 30V	10	15	21	mA
ON/OFF pin H threshold voltage	V _{TH ON/OFF}		2.1	2.6	3.1	V
ON/OFF pin L threshold voltage	V _{TL ON/OFF}		1.9	2.4	2.9	V
ON/OFF pin hysteresis voltage	ΔV _{T ON/OFF}		0.1	0.2	0.3	V
Oscillation frequency	f _{OSC}	R1 = 17kΩ, R2 = 22kΩ, CF = 220pF	180	200	220	kHz
Duty ratio	Γ _{DUTY}	R1 = 17kΩ, R2 = 22kΩ, CF = 220pF	45	48	51	%
Oscillation waveform upper limit voltage	V _{OSCH}		4	4.4	4.8	V
Oscillation waveform lower limit voltage	V _{OSCL}		1.8	2	2.2	V
Oscillation waveform upper/lower limit voltage difference	ΔV _{OSC}		2.1	2.4	2.7	V
Output low voltage	V _{OL1}	V _{CC} = 18V, I _O = 10mA	—	0.05	0.4	V
	V _{OL2}	V _{CC} = 18V, I _O = 100mA	—	0.7	1.4	V
	V _{OL3}	V _{CC} = 5V, I _O = 10mA	—	0.69	1	V
	V _{OL4}	V _{CC} = 5V, I _O = 100mA	—	1.3	2	V
Output high voltage	V _{OH1}	V _{CC} = 18V, I _O = -10mA	16	16.5	—	V
	V _{OH2}	V _{CC} = 18V, I _O = -100mA	15.5	16	—	V
Overheat protection operating temperature	T _{TS}		120	140	160	°C

■ 6932852 0012773 008 ■


Panasonic

■ Pin Descriptions

Pin No.		Symbol	Description
DIL	SO		
1	1	V_C	Pin to apply the supply voltage to the output transistor
2	2	V_{OUT}	IC output pin. Drives the MOS-FET or bipolar transistor.
3	3	$V_{OUT.COM}$	Output transistor ground pin
4	4	V_F	Detects the mean level of output pulses and provides output duty control and timer control.
5	7	ON/OFF	Pin to turn on/off the IC. The IC stops at "H" (output = "L") and starts at "L".
6	8	OVP	Detects an over-voltage and stops the IC; the stop state is held.
7	9	V_{IN}	Pin to feed back the output voltage of the power supply. It has internal gain.
8	10	I_{IN}	Pin to feed back the output voltage of the power supply.
9	11	T_{ON}	Pin to connect the resistor which determines the tilting of the charge period of an internally oscillated triangular wave.
10	12	C_F	Pin to connect the capacitance which determines the frequency of an internally oscillated triangular wave.
11	13	T_{OFF}	Pin to connect the resistor which determines the tilting of the discharge period of an internally oscillated triangular wave.
12	14	C_T	Pin to connect the capacitance which determines a timer control frequency.
13	17	GND	Ground pin for the system.
14	18	CLM ⁻	Overcurrent detection pin on the negative potential side.
15	19	CLM ⁺	Overcurrent detection pin on the positive potential side.
16	20	V_{CC}	Pin to apply the supply voltage. Detects the start and stop voltage.
—	5	FIN(GND)	Pin directly connected to the IC chip. Joint use for discharge and GND.
—	6	FIN(GND)	Pin directly connected to the IC chip. Joint use for discharge and GND.
—	15	FIN(GND)	Pin directly connected to the IC chip. Joint use for discharge and GND.
—	16	FIN(GND)	Pin directly connected to the IC chip. Joint use for discharge and GND.

■ Application Circuit

1) AN8090 flyback application

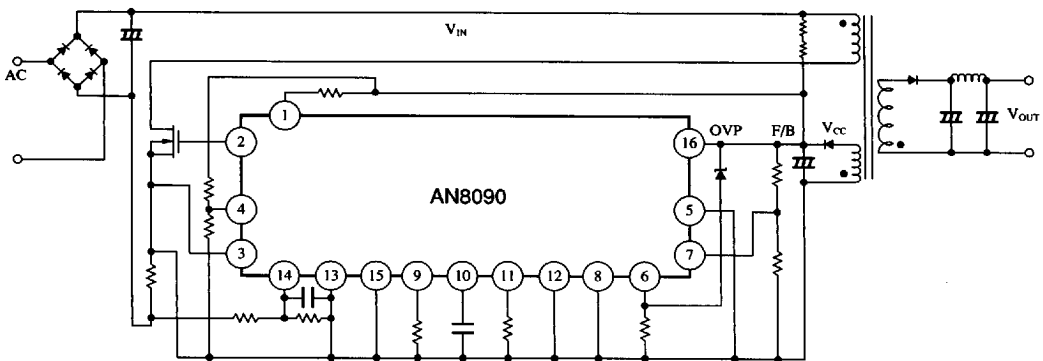


Voltage Regulators

■ 6932852 0012774 T44 ■

Panasonic



■ Application Circuit (cont.)

2) AN8090 feed-forward application

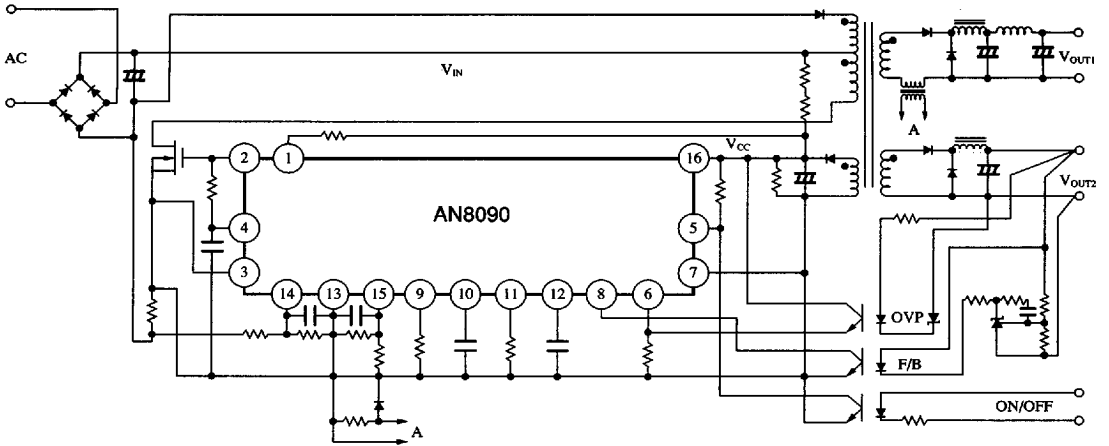

■ Supplementary Descriptions

● Characteristic Charts

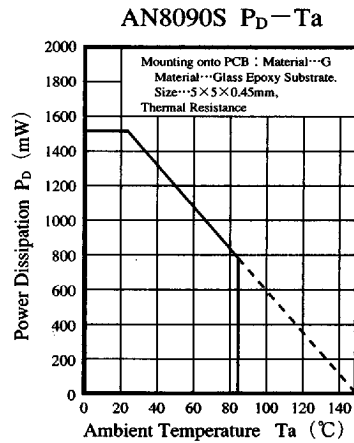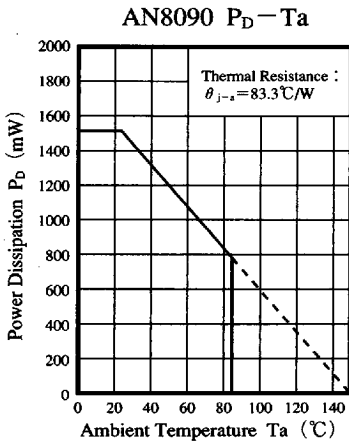


■ 6932852 0012775 980 ■

Panasonic


■ Supplementary Descriptions (cont.)

● Timing Charts

In Case of Normal Operation

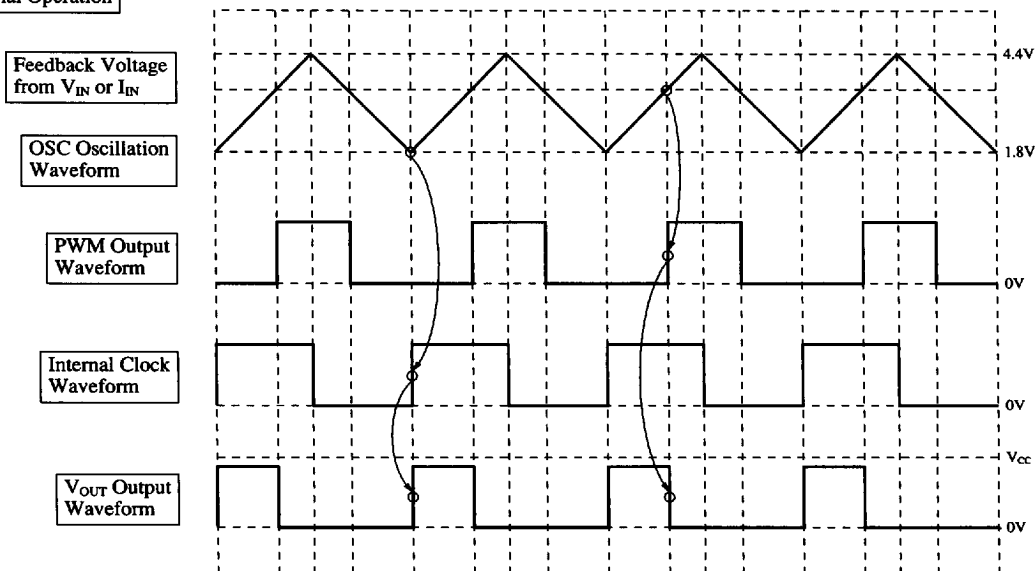

In Case of Current Limiting Operation (Note 1)

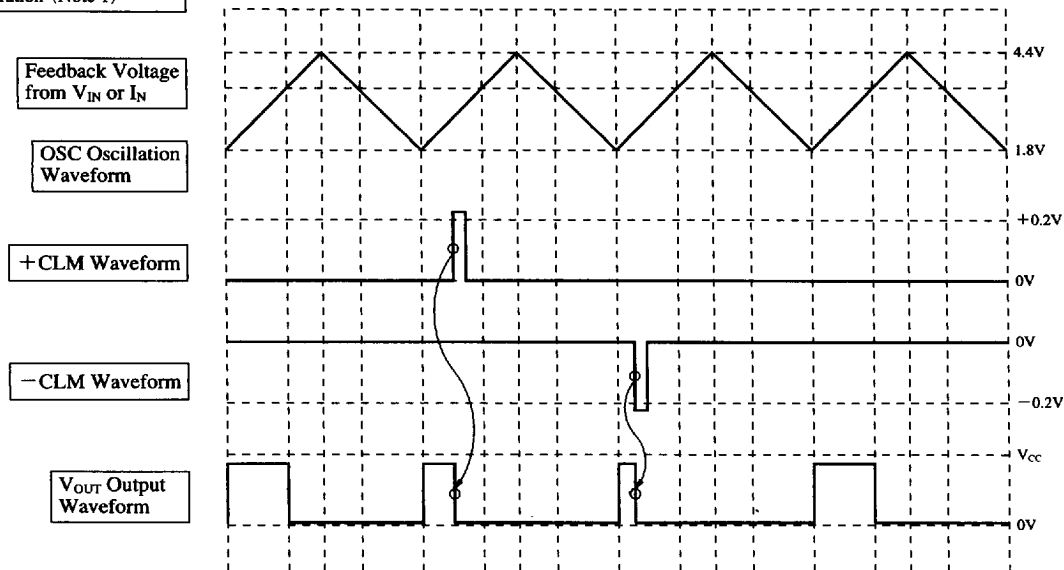

Note 1) The V_F pin voltage should be higher than the $T_{OFF(max)}$ control start voltage ($\leq 4V$).


■ 6932852 0012776 817 ■

Panasonic


■ Supplementary Descriptions (cont.)

● Timing Charts (cont.)

In Case of $T_{OFF(max)}$ Control Operation Note 2)

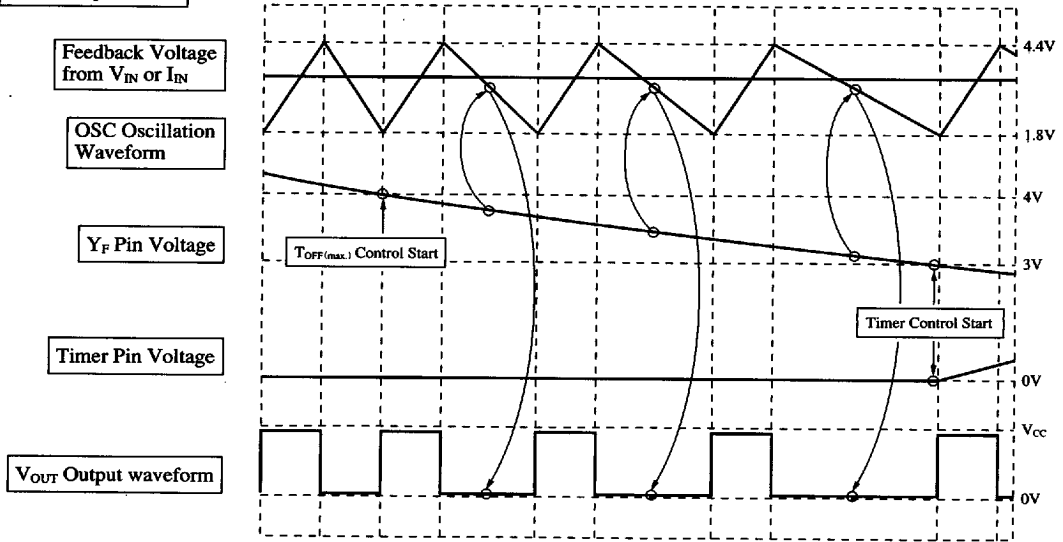

In Case of Timer Control Operation Note 3)

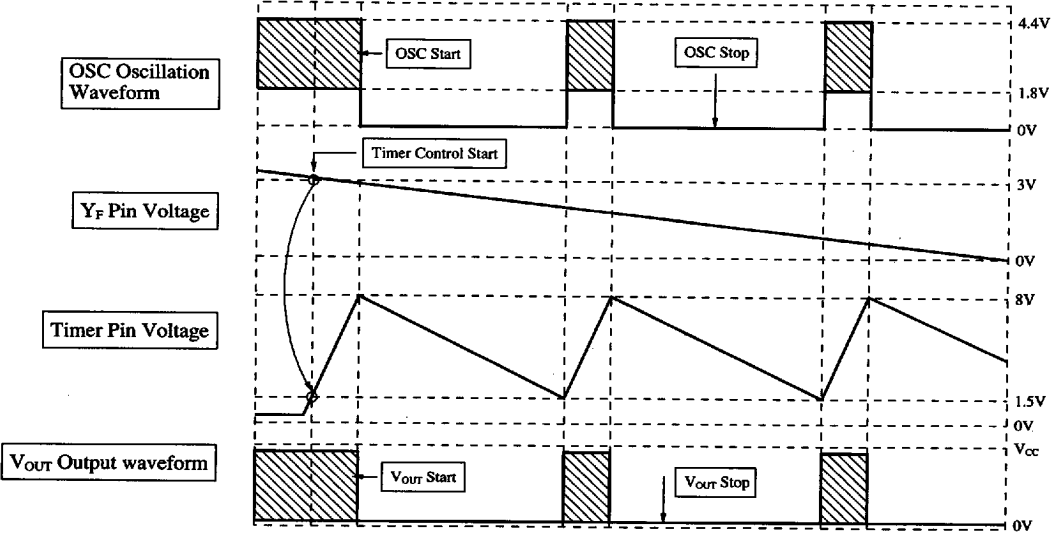

Note 2) In case of current limiting operation ($CLM+ \geq 0.2V$ and $CLM- \leq -0.2V$), $T_{OFF(max)}$ control and timer control work.
 Note 3) Even during timer control operation, the OFF period of OSC (V_{OUT}) is controlled by $T_{OFF(max)}$ control.

■ 6932852 0012777 753 ■

Panasonic



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.