

PHEMT GaAs IC SPDT Switch DC–2.5 GHz



AS182-73


Features

- $P_{1\text{ dB}}$ +30 dBm Typical @ +3 V
- IP3 43 dBm Typical @ +3 V
- Low Insertion Loss (0.3 dB @ 0.9 GHz)
- Low DC Power Consumption
- Ultra Miniature Low Cost SOT-6 Plastic Package

Description

The AS182-73 is an IC FET SPDT switch in a low cost SOT-6 plastic package. The AS182-73 features low insertion loss and positive voltage operation with very low DC power consumption. This switch is suitable for handset applications.

SOT-6

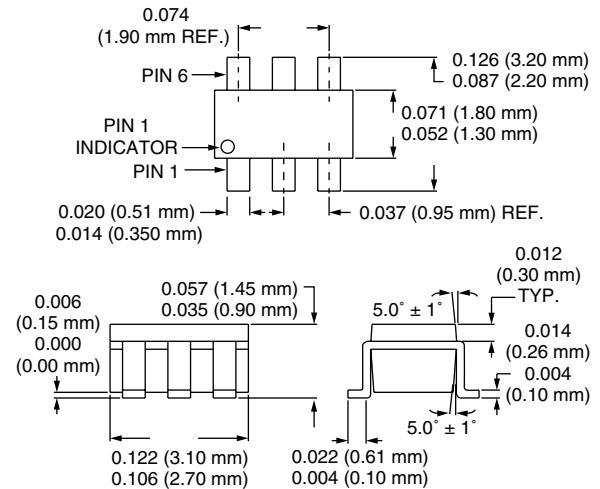

Electrical Specifications at 25°C (0, +3 V)


Parameter ¹	Frequency ²	Min.	Typ.	Max.	Unit
Insertion Loss ³	DC-1.0 GHz		0.30	0.4	dB
	DC-2.0 GHz		0.30	0.4	dB
	DC-2.5 GHz		0.55	0.6	dB
Isolation	DC-1.0 GHz	18	20		dB
	DC-2.0 GHz	12	14		dB
	DC-2.5 GHz	11	13		dB
VSWR ⁴	DC-2.5 GHz		1.2:1	1.6:1	

Operating Characteristics at 25°C (0, +3 V)


Parameter	Condition	Frequency	Min.	Typ.	Max.	Unit
Switching Characteristics ⁵	Rise, Fall (10/90% or 90/10% RF)			10		ns
	On, Off (50% CTL to 90/10% RF)			20		ns
	Video Feedthru			25		mV
Input Power for 1 dB Compression	0/+3 V	0.5–2.5 GHz		+30		dBm
	0/+5 V	0.5–2.5 GHz		+34		dBm
Intermodulation Intercept Point (IP3)	For Two-tone Input Power +15 dBm					
	0/+3 V	0.5–2.5 GHz		+43		dBm
	0/+5 V	0.5–2.5 GHz		+50		dBm
Control Voltages	$V_{\text{Low}} = 0 \text{ to } 0.2 \text{ V @ } 20 \mu\text{A Max.}$ $V_{\text{High}} = +3 \text{ V @ } 100 \mu\text{A Max. to } +5 \text{ V @ } 200 \mu\text{A Max.}$					

1. All measurements made in a 50 Ω system, unless otherwise specified.
2. DC = 300 kHz.
3. Insertion loss changes by 0.003 dB/°C.
4. Insertion loss state.
5. Video feedthru measured with 1 ns risetime pulse and 500 MHz bandwidth.


Typical Performance Data (0, +3 V)

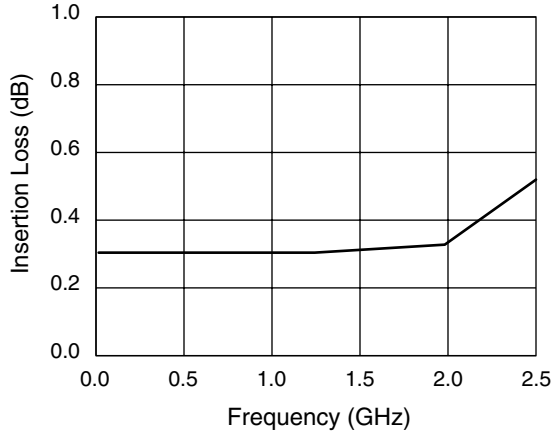

Insertion Loss vs. Frequency

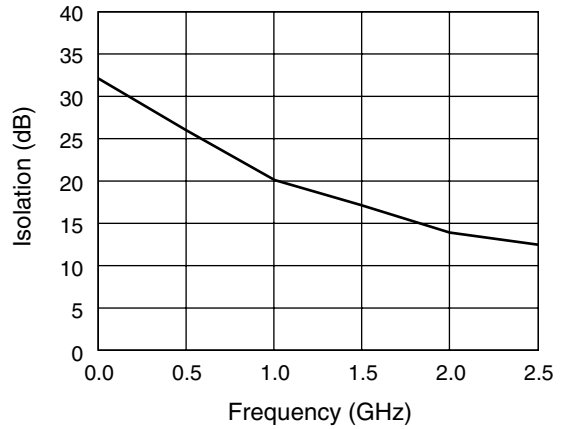

Isolation vs. Frequency

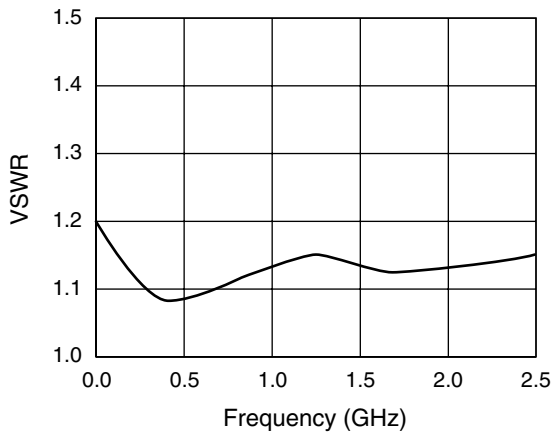

VSWR vs. Frequency

Truth Table


V ₁	V ₂	J ₁ -J ₂	J ₁ -J ₃
0	V _{High}	Isolation	Insertion Loss
V _{High}	0	Insertion Loss	Isolation

V_{High} = +3 to +5 V.

Absolute Maximum Ratings

Characteristic	Value
RF Input Power	6 W > 500 MHz 0/+7 V Control
Control Voltage	-0.2 V, +8 V
Operating Temperature	-40°C to +85°C
Storage Temperature	-65°C to +150°C
θ _{JC}	25°C/W

Pin Out

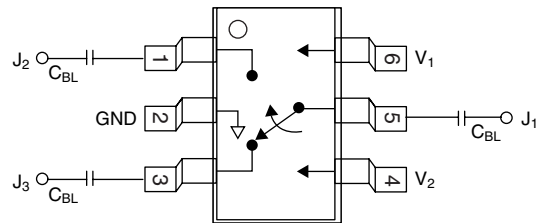

DC blocking capacitors (C_{BL}) must be supplied externally for positive voltage operation.
C_{BL} = 100 pF for operation >500 MHz.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.