

AN6535


4-pin Negative Adjustable Voltage Regulator

■ Overview


The AN6535 is a monolithic 4-pin negative adjustable voltage regulator. With an external resistor, it provides any stabilized output voltages between $-5V$ and $-30V$, and is optimum for the power circuits with a current capacitance of up to $0.5A$. With various protective circuits built in, it has high reliability and is provided in a 4-lead SIL plastic package.

■ Features

- Wide range of output voltages: $V_{O} = -5$ to $-30V$
- Internal thermal overload protection
- Internal short-circuit protection
- Output transistor safe area compensation

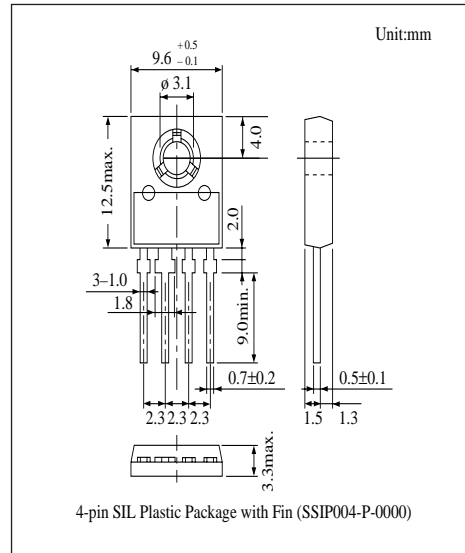

■ Block Diagram

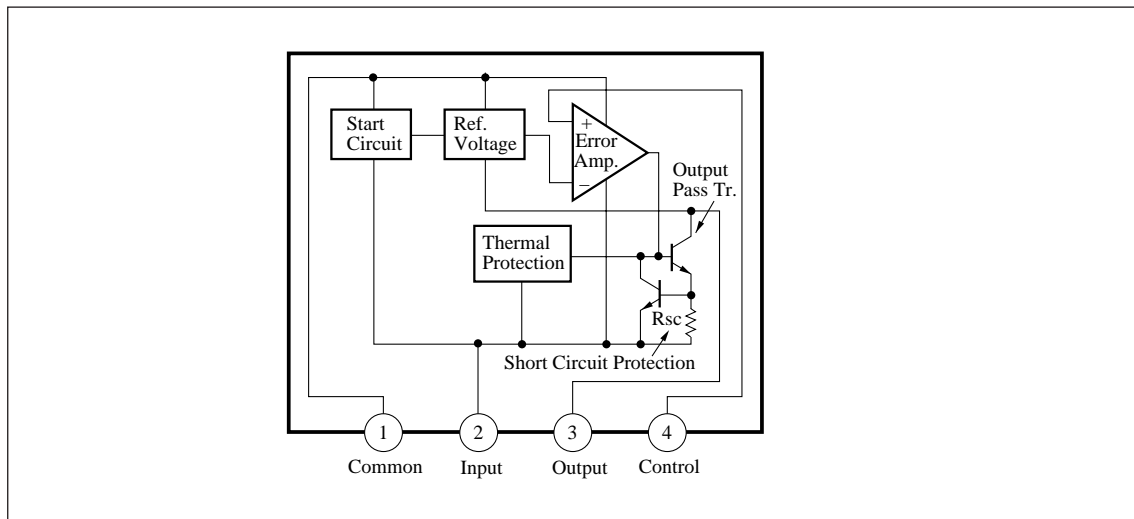

■ Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Unit
Supply voltage	V _{CC}	-40	V
Supply current	I _{CC} *1	1	A
Power dissipation	P _D	7.5	W
Operating ambient temperature	T _{opr}	-20 to +80	°C
Storage	T _{stg}	-55 to +150	°C

*1 The internal circuit is provided with a current limiting circuit.

*2 Maximum power dissipation value when there is no heat sink (The value varies depending on the external heat dissipation state)









■ Electrical Characteristics (Ta=25°C)

Parameter	Symbol	Condition	min	typ	max	Unit		
Output voltage tolerance	V _O	V _I =V _O -3V to V _O -15V, I _O =5 to 350mA, T _j =25°C	—	—	4	%		
Line regulation	REG _{IN}	V _O =-5V, I _O =200mA, V _I =-7.5 to -25V, T _j =25°C	—	—	1	%		
		V _O =-18V, I _O =5mA, V _I =-21 to -33V, T _j =25°C	—	—	0.75	%		
		V _O =-18V, I _O =200mA, V _I =-21 to -25V, T _j =25°C	—	—	0.67	%		
Load regulation	REG _L	I _O =5 to 500mA T _j =25°C	V _O =-5V, V _I =-12V V _O =-18V, V _I =-25V		—	—	1	%
Bias current	I _{Bias}	T _j =25°C	—	1.5	3	mA		
Control pin current	I _{cont}	T _j =25°C	—	—	3	μA		
Ripple rejection ratio	RR	V _I =-8 to -18V, V _O =-5V, f=120Hz	60	—	—	dB		
Output noise voltage	V _{no}	V _O =-5V, f=10Hz to 100kHz	—	40	—	μV		
Minimum input/output voltage difference	V _{DIF (min.)}	I _O =500mA, T _j =25°C	—	1.1	—	V		
Short-circuit current	I _{OS}	V _I =-35V, V _O =-5V, T _j =25°C	—	100	600	mA		
Peak output current	I _{OP}	V _O =-5V, T _j =25°C	0.4	0.8	1.4	A		
Output voltage temperature coefficient	ΔV _O /Ta	V _O =-5V I _O =5mA	T _j =-20 to +25°C	—	0.2	—	mV/°C	
			T _j =25 to 150°C	—	-0.3	—		
Control pin voltage	V _{cont}	T _j =25°C	-3.12	-3	-2.88	V		


Note 1) The specified condition T_j=25°C means that the test should be conducted with each test time reduced (within 10 ms) so that the drift in the characteristic value due to a temperature rise at chip junction can be ignored.

Note 2) Unless otherwise specified, V_I=-10V, V_O=-5V, I_O=350mA, C_I=2μF, and C_O=1μF

■ Characteristics Curve

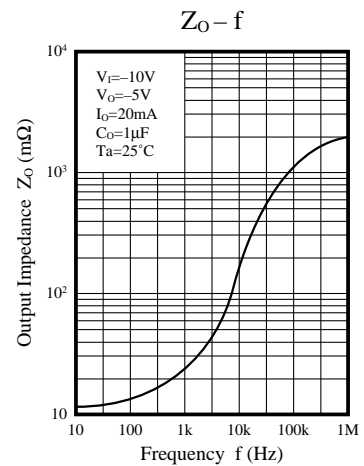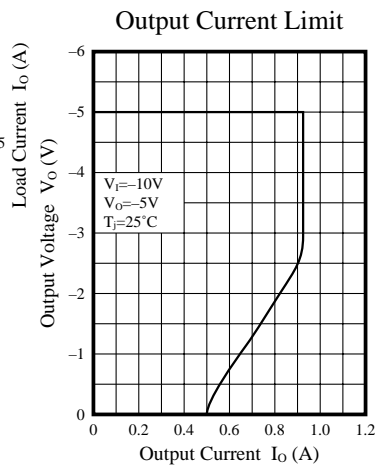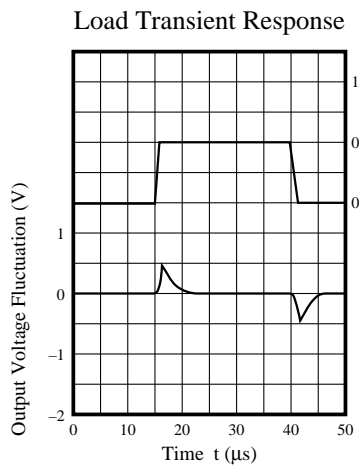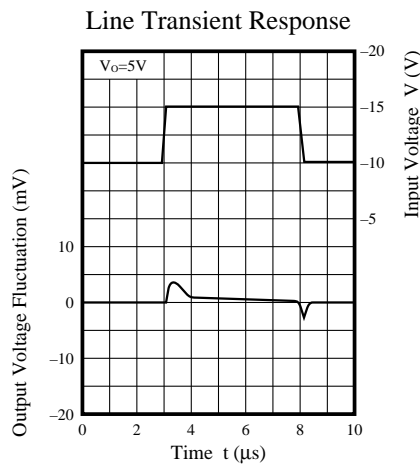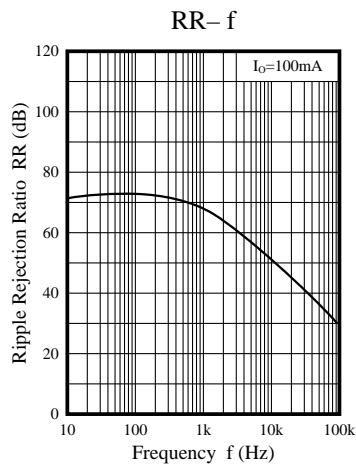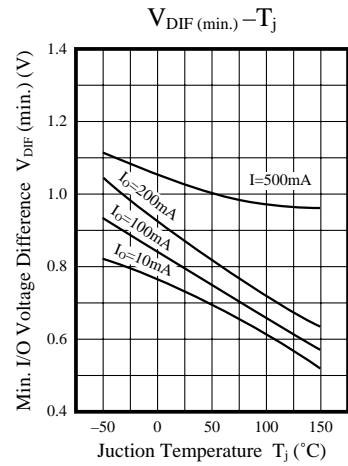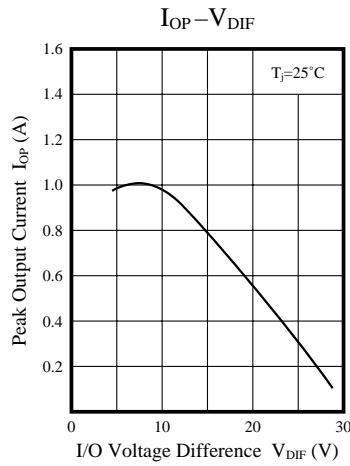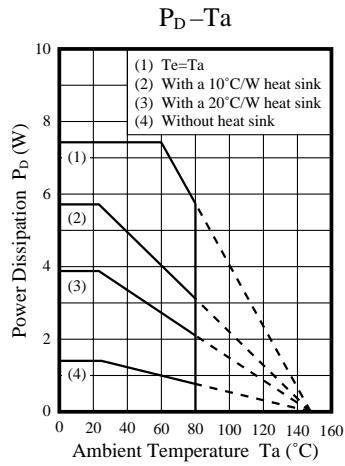

Basic Regulator Circuit



$$V_O = V_{\text{cont}} \left(\frac{R_1 + R_2}{R_1} \right)$$


$$(V_{\text{cont}} \cong 3\text{V}, R_1 = 3\text{k}\Omega)$$

C_1 : Necessary when the V_1 line is long.

C_0 : Improves the transient response.


Application Circuits

(1) Current Boost Circuit

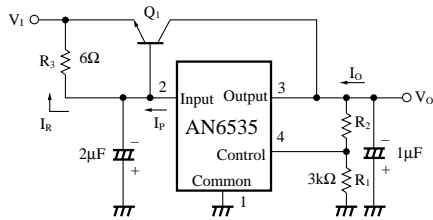

$$R_3 = \frac{V_{BE(Q1)} \cdot \beta}{(\beta + 1) I_P - I_O}$$

(2) Current Boost Circuit (With Current Limiting Circuit)

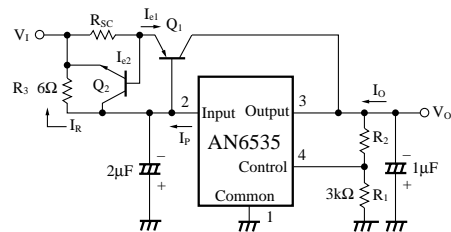

$$R_{SC} = \frac{V_{BE(Q1)}}{I_{E1(\text{max.})}}$$

$$R_3 = \frac{V_{BE(Q1)} + I_{E1} R_{SC}}{I_O - I_{E1}}$$

$$I_{E1(\text{max.})} = I_{P(\text{max.})} - \frac{V_{BE(Q1)} + V_{BE(Q1)}}{R_3}$$



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.