

PNP Transistors for Switching Applications


ASY 48
ASY 70

SIEMENS AKTIENGESELLSCHAFT


ASY 48 and ASY 70 are alloyed germanium PNP transistors in 1 A 3 DIN 41871 case (similar to TO 1). The leads are electrically insulated from the case. The collector terminal is marked by a red dot at the edge of the case. The transistors are particularly suitable for switching applications.

Not for new design

Type	Ordering code
ASY 48 ¹⁾	Q60118-Y82
ASY 48 IV	Q60118-Y48-D
ASY 48 V	Q60118-Y48-E
ASY 48 VI	Q60118-Y48-F
ASY 70 ¹⁾	Q60118-Y81
ASY 70 IV	Q60118-Y70-D
ASY 70 V	Q60118-Y70-E
ASY 70 VI	Q60118-Y70-F
Heat sink	Q62901-B1



Approx. weight 1 g



Dimensions in mm

Maximum ratings

	ASY 48	ASY 70	
Collector-emitter voltage	-V _{CEO} 45	30	V
Collector-emitter voltage (V _{BE} ≥ 0.2 V)	-V _{CEV} 64	32	V
Collector-base voltage	-V _{CBO} 64	32	V
Emitter-base voltage	-V _{EBO} 16	16	V
Collector current	-I _C 300	300	mA
Base current	-I _B 60	60	mA
Junction temperature	T _j 90	90	°C
Storage temperature range	T _{stg} -55 to +75	-55 to +75	°C
Total power dissipation (T _{case} = 45°C)	P _{tot} 900	900	mW

Thermal resistance

Junction to ambient air	R _{thJA} ≤ 300	≤ 300	K/W
Junction to case	R _{thJC} ≤ 50	≤ 50	K/W

Static characteristics (T_{amb} = 25°C)

	ASY 48	ASY 70	
Collector cutoff current (-V _{CBO} = 10 V)	-I _{CBO} < 10	3 (< 10)	μA
Collector cutoff current (-V _{CBO} = 32 V)	-I _{CBO} -	5 (< 18)	μA
Collector cutoff current (-V _{CBO} = 64 V)	-I _{CBO} 6 (< 18)	-	μA
Emitter cutoff current (-V _{EBO} = 5 V)	-I _{EBO} -	3	μA
Emitter cutoff current (-V _{EBO} = 16 V)	-I _{EBO} 4 (< 18)	4 (< 18)	μA
Collector cutoff current (-V _{CEV} = 32 V; V _{BE} ≥ 0.2 V)	-I _{CEV} -	5 (< 18)	μA
Collector cutoff current (-V _{CEV} = 64 V; V _{BE} ≥ 0.2 V)	-I _{CEV} 6 (< 18)	-	μA
Collector-emitter saturation voltage (I _C = 300 mA; I _B = 15 mA)	-V _{CEsat} 0.15 (< 0.25)	0.15 (< 0.25)	V

¹⁾ If the order does not include any exact indication of the current amplification group desired, a transistor of a current amplification group just available from stock will be delivered.

Static characteristics ($T_{amb} = 25^{\circ}\text{C}$)


The transistors are grouped according to the DC current gain h_{FE} at $-I_C = 100\text{ mA}$ and are marked by Roman numerals.

h_{FE} group		IV	V	VI	
$-I_C$ mA	$-V_{CE}$ V	h_{FE} I_C/I_B	h_{FE} I_C/I_B	h_{FE} I_C/I_B	$-V_{BE}$ V
2	0.5	47	79	114	0.13 (<0.20)
100	0.5	45 (30 to 60)	75 (50 to 100)	110 (75 to 150)	0.32 (<0.55)
300	0.5	35	58	86	0.44 (<0.80)

Dynamic characteristics ($T_{amb} = 25^{\circ}\text{C}$)


	ASY 48	ASY 70	
Transition frequency $-I_C = 5\text{ mA}$; $-V_{CE} = 5\text{ V}$	f_T 1.2	1.5	MHz
Base intrinsic resistance	$r_{bb'}$ 75 (<200)	75 (<200)	Ω
Collector-base capacitance $-V_{CBO} = 5\text{ V}$	C_{CBO} 25 (<40)	25 (<40)	pF
Switching times			
Current selection			
Operating point: $-I_C = 100\text{ mA}$; $U = 1.5$ to 3 ; $a = 1$ to 2 ; $-V_{CC} = 10\text{ V}$	t_{on} 3.5 (<10)	3.5 (<10)	μs
	t_s 1.1 (<3)	1.1 (<3)	μs
	t_f 2.1 (<7)	2.1 (<7)	μs
Voltage selection			
Operating point: $-I_C = 100\text{ mA}$; $-V_{BBE1} = 4\text{ V}$; $V_{BBE2} = 1\text{ V}$; $R_{BB} = 100\ \Omega$	t_{on} 0.25 (<1)	0.15 (<1)	μs
	t_s 1.3 (<2.5)	1.3 (<2.5)	μs
	t_f 0.5 (<1.5)	0.5 (<1.5)	μs

Total perm. power dissipation versus temperature $P_{tot} = f(T)$; R_{th} = parameter

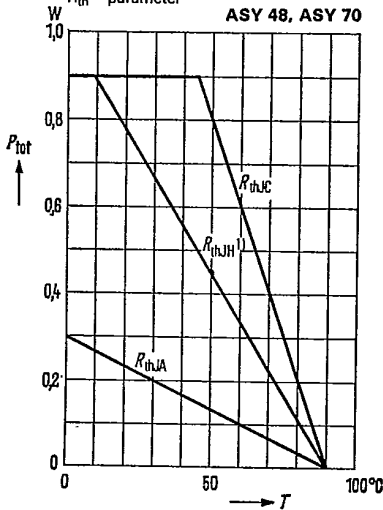

1) Heat sink aluminum 12.5 cm² x 2 mm

Permissible pulse load $r_{thJC} = f(t)$ v = parameter

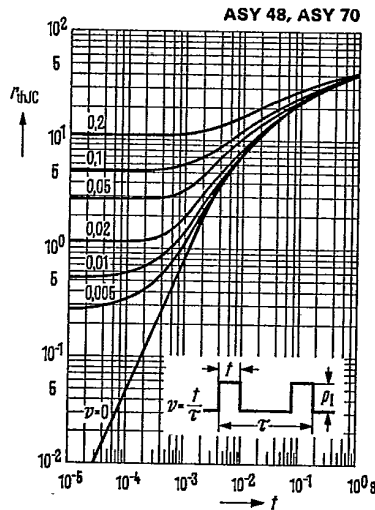



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.