

GaAs IC 4 Bit Digital Attenuator 3 dB LSB DC–1 GHz



AT001D6-25


Features

- Attenuation in 3 dB Steps to 45 dB
- Low DC Power Consumption
- Low Cost SOIC-16 Plastic Package

Description

The AT001D6-25 is an IC FET digital attenuator consisting of four monolithic attenuators with LSB of 3 dB and a total attenuation of 45 dB with all attenuators connected. The attenuator is packaged in the plastic 16 lead surface mount package for low cost commercial cellular radio applications.

SOIC-16

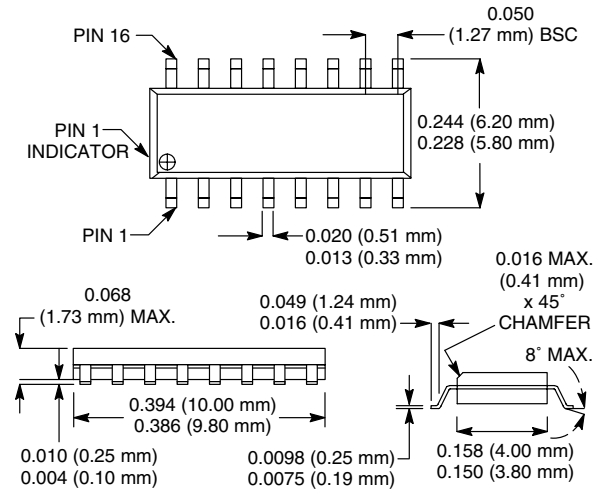

Electrical Specifications at 25°C (0, -5 V)


Parameter ¹	Frequency ²	Min.	Typ.	Max.	Unit
Insertion Loss ³	DC–0.5 GHz		2.5	3.2	dB
	DC–1.0 GHz		3.5	4.0	dB
Attenuation Range ⁴	DC–1.0 GHz	10% or ± 0.5 dB Whichever is Greater 12% for 45 dB Attenuation			
VSWR (I/O)	DC–0.5 GHz		1.4:1	1.6:1	
	DC–1.0 GHz		1.6:1	1.8:1	

Operating Characteristics at 25°C (0, -5 V)


Parameter	Condition	Frequency	Min.	Typ.	Max.	Unit
Switching Characteristics ⁵	Rise, Fall (10/90% or 90/10% RF) On, Off (50% CTL to 90/10% RF) Video Feedthru			10		ns
				20		ns
				20		mV
Input Power for 1 dB Compression		0.50–1.0 GHz		+24		dBm
		0.05 GHz		+14		dBm
Intermodulation Intercept Point (IP3)	For Two-tone Input Power +13 dBm	0.50–1.0 GHz		+43		dBm
		0.05 GHz		+32		dBm
Control Voltages	V _{Low} = 0 to -0.2 V @ 20 μA Max. V _{High} = -5 V @ 50 μA to -8 V at 200 μA Max.					

1. All measurements made in a 50 Ω system, unless otherwise specified.
2. DC = 300 kHz.
3. Insertion loss changes by 0.003 dB/°C.
4. Attenuation referenced to insertion loss.
5. Video feedthru measured with 1 ns risetime pulse and 500 MHz bandwidth.


Typical Performance Data (0, -5 V)

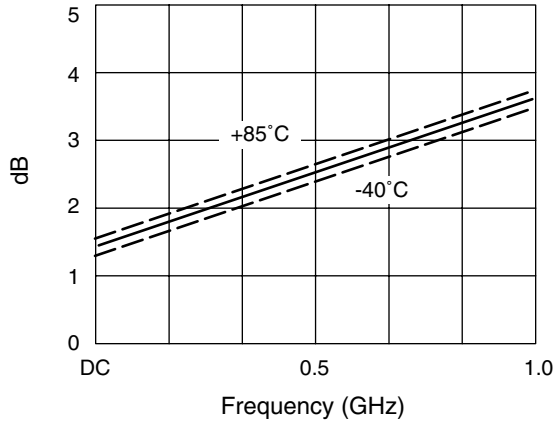


Insertion Loss vs. Frequency

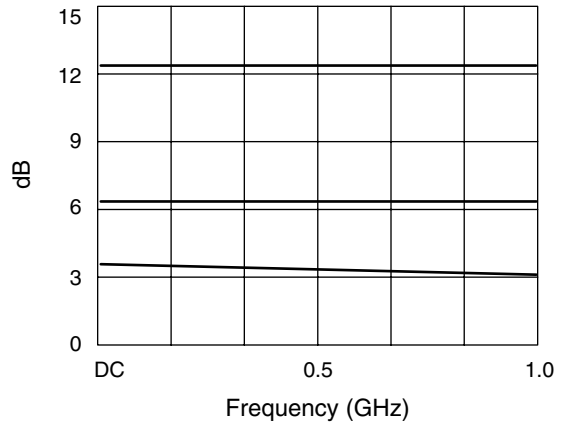

3, 6, 12 dB States

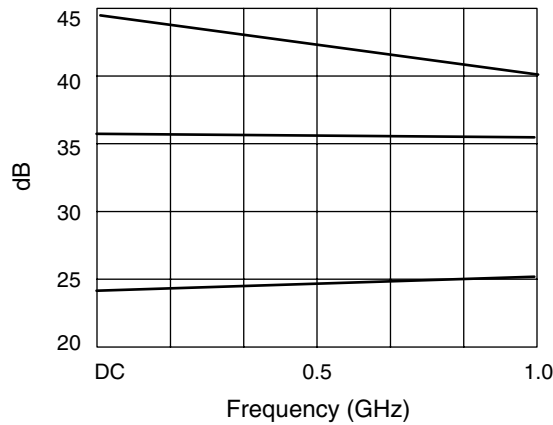

24, 36, 45 dB States

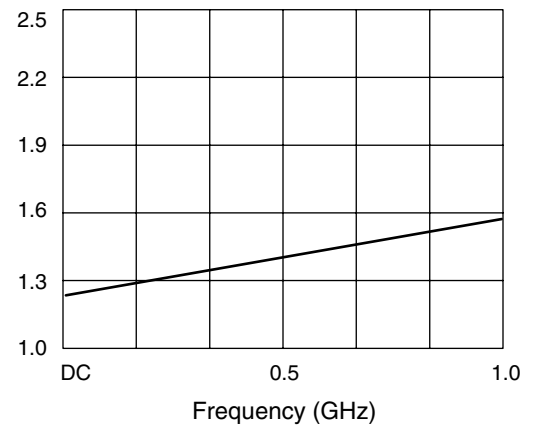


VSWR vs. Frequency (All States)

Absolute Maximum Ratings

Characteristic	Value
RF Input Power	2 W > 500 MHz 0/-8 V 0.5 W @ 50 MHz 0/-8 V
Control Voltage	+0.2 V, -8 V
Operating Temperature	-40°C to +85°C
Storage Temperature	-65°C to +150°C
θ_{JC}	25°C/W

Note: Exceeding these parameters may cause irreversible damage.

Pin Out

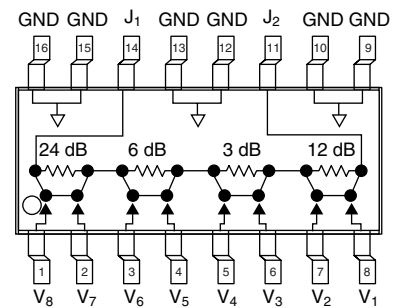

Truth Table

V ₁	V ₂	V ₃	V ₄	V ₅	V ₆	V ₇	V ₈	Attenuation
12 dB	3 dB	6 dB	24 dB	Reference I.L.				
-5	0	-5	0	0	-5	0	-5	3 dB
-5	0	-5	0	-5	0	0	-5	6 dB
0	-5	-5	0	0	-5	0	-5	12 dB
-5	0	-5	0	0	-5	-5	0	24 dB
0	-5	0	-5	-5	0	-5	0	45 dB



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.