

AN5313NK, AN5313NS

Color TV Video and Chrominance Signal Processing Circuits



■ Outline

The AN5313NK and The AN5313NS are integrated circuits designed for all color TV video and chrominance signal processing circuits.

■ Features

- The AN5313NK and AN5313NS provide total video and chrominance signal processing circuit, allow compact set design
- Low voltage operation (4.0V~5.6V)
- Incorporates luminance signal mixing circuit and provides R. G. B. color output
- All DC control system for simplicity of wiring (color, tint, contrast picture, luminance)

■ Block Diagram

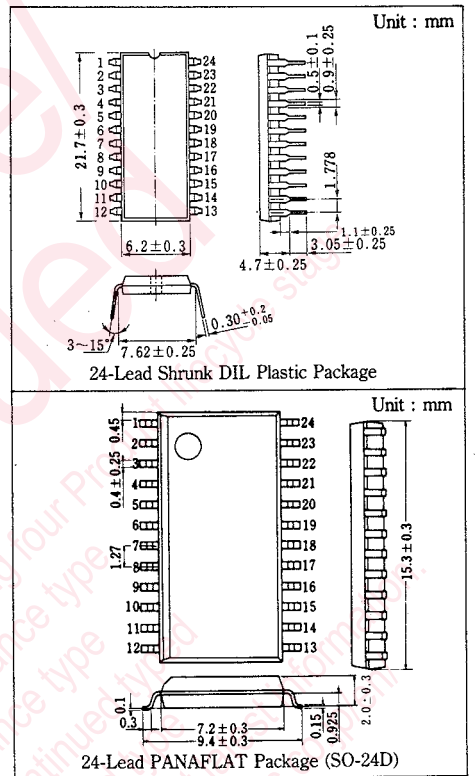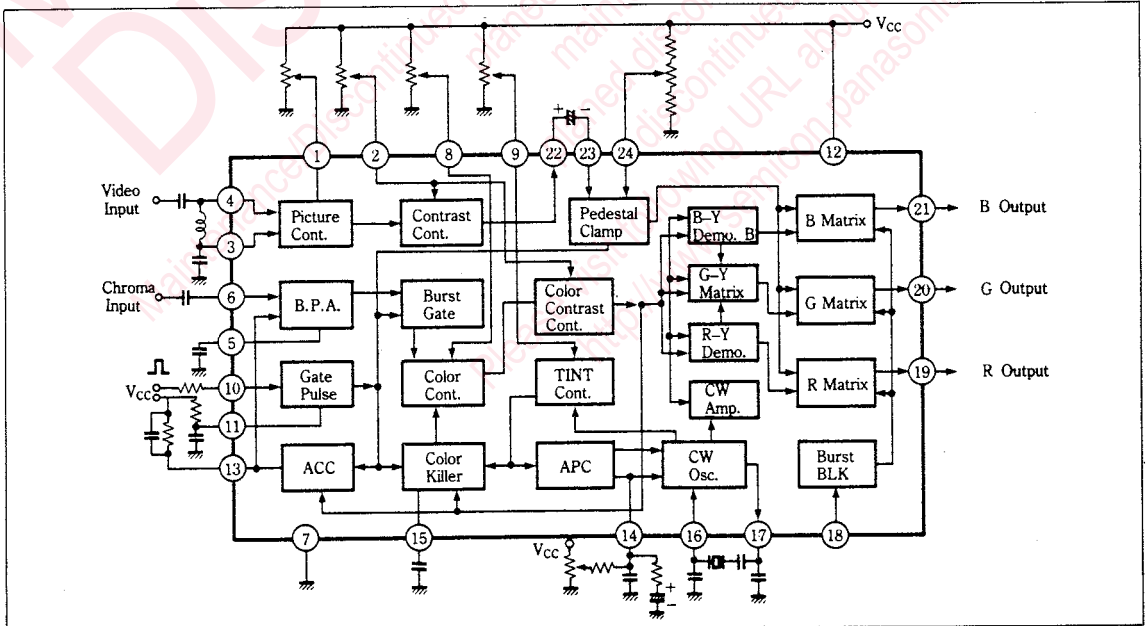

■ Pin

Pin No.	Pin Name	Pin No.	Pin Name
1	Picture Control	13	ACC Filter
2	Contrast Control	14	APC Filter
3	Video Input(1)	15	Color Killer Filter
4	Video Input(2)	16	3.58MHz Oscillator Input
5	Chrominance By-Pass	17	3.58MHz Oscillator Output
6	Chrominance Input	18	Blanking Pulse Input
7	GND	19	R Output
8	Color Control	20	G Output
9	Tint Control	21	B Output
10	Hor. Sync Input	22	Y Output
11	Burst Gate Pulse Width Adjustment	23	Y Input
12	V _{cc}	24	Brightness Control

■ Absolute Maximum Ratings (T_a=25°C)

Item	Symbol	Rating		Unit	
Voltage	Supply Voltage	V _{cc}	6.0		V
	Circuit Voltage	V ₁₂₋₇	0	6.0	V
		V _{1, 2, 8, 9, 24-7}	0	V ₁₂₋₇	V
		V ₁₀₋₇	-2	V ₁₂₋₇	V
	V ₁₈₋₇	-3	V ₁₂₋₇	V	
Current	Circuit Current	I	-30	+5	mA
Power Dissipation(T _a =70°C)		P _D	400		mW
Temperature	Operating Ambient Temperature	T _{opr}	-20~+70		°C
	Storage Temperature	T _{stg}	-55~+150		°C

■ Typical Operation Condition (T_a=25°C)


Item	Symbol	typ.		Unit
Supply Voltage	V _{cc}	4.8		V
Chroma Input Signal (Burst Signal)	v ₆	typ. 75	max. 150	mV _{P-P}
Video Input Signal (Sync.~White Level)	v _{3, v4}	typ. 0.2	max. 0.3	V _{P-P}
Horizontal Sync. Signal Input (Burst Gate Pulse)	V _{P10}	3.0/4.7μs		V _{O-P}
Blanking Pulse	V _{P18}	3.0/12μs		V _{O-P}
Color Control Voltage	V ₈	0~4.8		V
Tint Control Voltage	V ₉	0~4.8		V
Contrast Control Voltage	V ₂	0~4.8		V
Picture Control Voltage	V ₁	0~4.8		V
Brightness Control Voltage	V ₂₄	1.4~2.6		V

■ Electrical Characteristics ($V_{CC}=12V$, $T_a=25^{\circ}C$)


Item	Symbol	Test Circuit	Condition	min.	typ.	max.	Unit	
Total Circuit Current	I_{tot}	1	$V_{CC}=4.8V$	27	37	47	mA	
Color Difference Output Voltage (1)	$e_{o(1)}$	2	Rainbow 75mVp-p, Color Center, Contrast max.	0.5	0.7	0.9	V_{P-P}	
ACC Characteristics	ACC	2	Rainbow 15mVp-p, Color Center, Contrast max.	0.7	0.9	1.1	times	
Color Difference Output Voltage (2)	$e_{o(2)}$	2	Rainbow 75mVp-p, Color max., Contrast max.	1.6	2.2	3.1	V_{P-P}	
Color Leak	e_{LC}	2	Rainbow 75mVp-p, Color min., Contrast max.		10	40	mVp-p	
Oscillation Frequency	f_{osc}	3	Pin⑩input invalid signal, Trimmer to be set by standard samples			± 170	Hz	
Control Sensitivity(VCO)	β	3	Frequency change when V_1 (3.4V) and V_2 (3.6V) are applied to Pin⑨	2.7	3.0	3.3	Hz/mV	
Phase Detector Sensitivity (APC)	μ	3	Apply $\Delta\theta$ changed frequency for burst phase to Pin⑨ of 10' Pin⑨ voltage change	19	23	27	mV/deg.	
APC Pull-in Range	f_{APC}	3	Rainbow 75mVp-p, measured by changing burst frequency	± 450	± 550		Hz	
Tint Variable Range	$\theta_{(Tint)}$	2	Rainbow 75mVp-p, Color center, Tint min.~max.	+17	+27	+37	deg.	
				-48	-58	-68		
Demodulation Output Ratio(1)	R/B	4	Pin⑥3.58MHz, 75mVp-p Pin⑦3.59MHz, 500mVp-p Measure beat frequency of Pins⑧, ⑨, and⑩.	0.86	0.94	1.04	times	
Demodulation Output Ratio(2)	G/B	4	Measure beat frequency of Pins⑧, ⑨, and⑩.	0.25	0.30	0.35	times	
Demodulation Angle(1)	$\angle R$	4	Pin⑥3.58MHz, 75mVp-p Pin⑦3.59MHz, 500mVp-p Measure beat frequency of Pins⑧, ⑨, and⑩. $\angle B=0$ degree	94	97.5	103	deg.	
Demodulation Angle(2)	$\angle G$	4	Measure beat frequency of Pins⑧, ⑨, and⑩. $\angle B=0$ degree	228	235	242	deg.	
Demodulation Output Residual Carrier	e_{car}	3	Input invalid signal, 3.58MHz of each output Carrier leak element		40	60	mVp-p	
Color Difference Output Contrast Ratio	Δe_{oc}	2	Rainbow 75mVp-p, Color center, Tint center, Contrast min.~max.	3.0	3.7	4.25	times	
Color Killer Level	e_k	2	Rainbow 75mVp-p, Color center, Tint center, Contrast min.~max.	-39	-34	-28	dB	
Voltage Amplification(Video)	A_V	5	$f=20kHz$	Picture min. Contrast max.	6.1	6.9	7.7	times
Video Output Contrast Ratio	Δe_{vc}	5	Sine wave input 0.1 Vp-p	Picture min. Contrast variable	3.5	4.3	5.0	times
Picture Variable Range	Δf_{vp}	5	$f=2.5MHz$, 0.2 Vp-p input, Picture max./min.	18	21	24	dB	
DC Transfer Rate	T_{DC}	5	Video input 0.2 Vp-p, APL10~90%	92	97		%	
Y Output DC Voltage	E_O	3	Video input invalid signal, Contrast max.	1.2	2.0	2.8	V	
E_c Change with Ambient Temperature	$\Delta E_c - \gamma / \Delta T_a$	3	$T_a = -20 \sim 70^{\circ}C$		-3.6		mV/ $^{\circ}C$	

Note: Operating supply voltage range is $V_{CC(opr)} = 4.0 \sim 5.6V$


Test Circuit 1 (I_{tot})

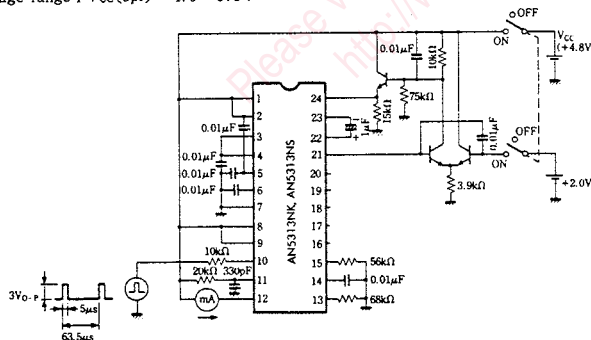


Test Circuit 2 ($e_{O(1)}$, ACC, $e_{O(2)}$, eLC, $Q(Tint)$, Δe_{OC} , e_k)

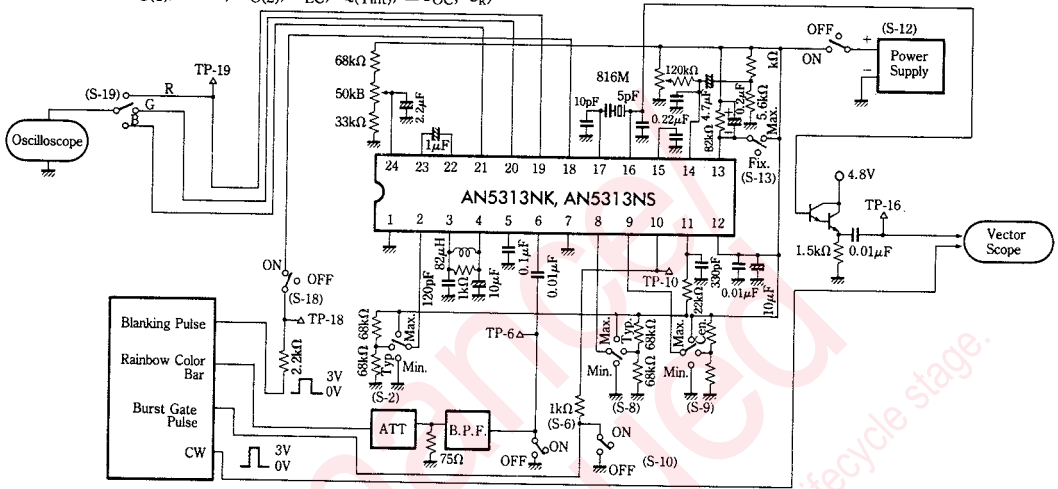

Test Circuit 3 (f_{osc} , β , μ , f_{APC} , e_{car} , E_0)

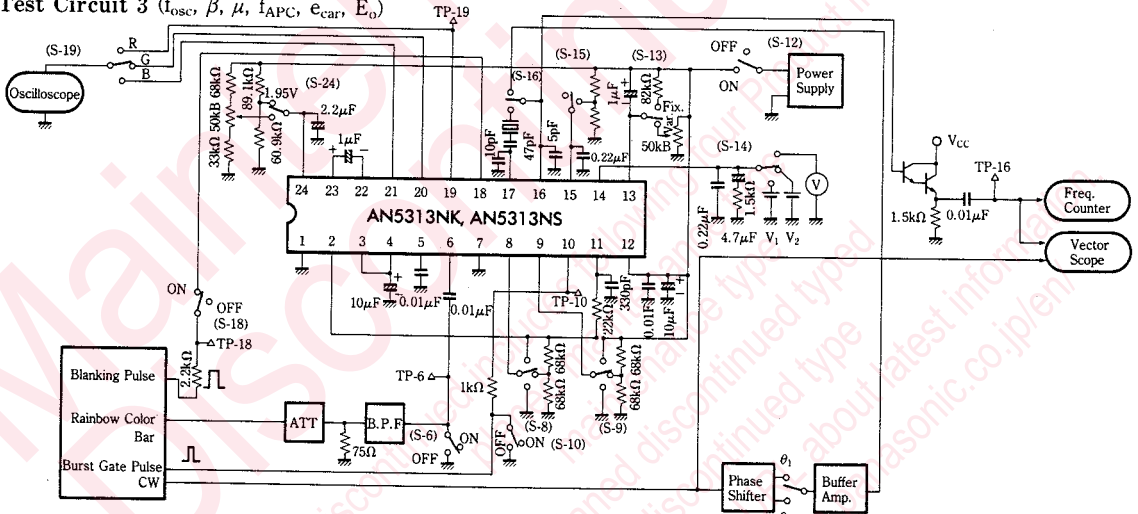

Test Circuit 4 (R/B, G/B, $\angle R$, $\angle G$)

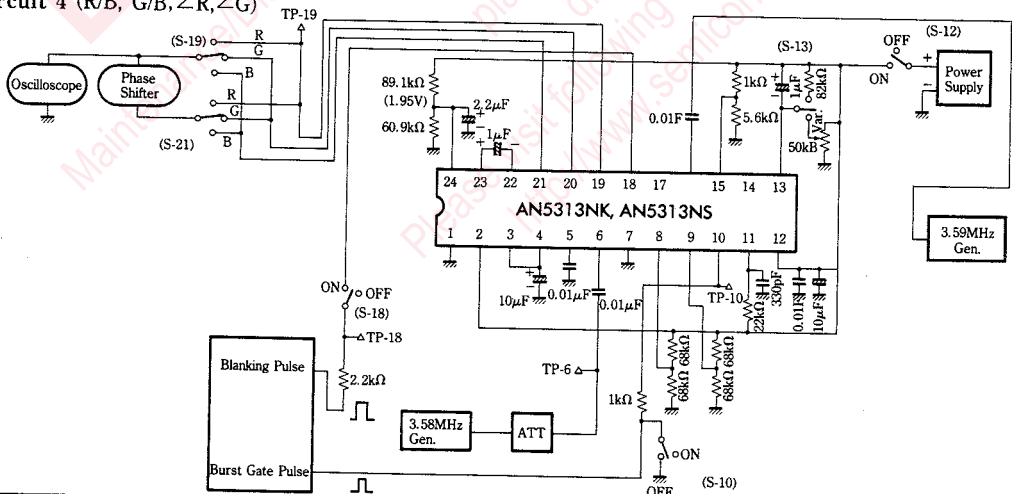

Request for your special attention and precautions in using the technical information and semiconductors described in this book

- (1) If any of the products or technical information described in this book is to be exported or provided to non-residents, the laws and regulations of the exporting country, especially, those with regard to security export control, must be observed.
- (2) The technical information described in this book is intended only to show the main characteristics and application circuit examples of the products. No license is granted in and to any intellectual property right or other right owned by Panasonic Corporation or any other company. Therefore, no responsibility is assumed by our company as to the infringement upon any such right owned by any other company which may arise as a result of the use of technical information described in this book.
- (3) The products described in this book are intended to be used for standard applications or general electronic equipment (such as office equipment, communications equipment, measuring instruments and household appliances).
Consult our sales staff in advance for information on the following applications:
 - Special applications (such as for airplanes, aerospace, automobiles, traffic control equipment, combustion equipment, life support systems and safety devices) in which exceptional quality and reliability are required, or if the failure or malfunction of the products may directly jeopardize life or harm the human body.
 - Any applications other than the standard applications intended.
- (4) The products and product specifications described in this book are subject to change without notice for modification and/or improvement. At the final stage of your design, purchasing, or use of the products, therefore, ask for the most up-to-date Product Standards in advance to make sure that the latest specifications satisfy your requirements.
- (5) When designing your equipment, comply with the range of absolute maximum rating and the guaranteed operating conditions (operating power supply voltage and operating environment etc.). Especially, please be careful not to exceed the range of absolute maximum rating on the transient state, such as power-on, power-off and mode-switching. Otherwise, we will not be liable for any defect which may arise later in your equipment.
 - Even when the products are used within the guaranteed values, take into the consideration of incidence of break down and failure mode, possible to occur to semiconductor products. Measures on the systems such as redundant design, arresting the spread of fire or preventing glitch are recommended in order to prevent physical injury, fire, social damages, for example, by using the products.
- (6) Comply with the instructions for use in order to prevent breakdown and characteristics change due to external factors (ESD, EOS, thermal stress and mechanical stress) at the time of handling, mounting or at customer's process. When using products for which damp-proof packing is required, satisfy the conditions, such as shelf life and the elapsed time since first opening the packages.
- (7) This book may be not reprinted or reproduced whether wholly or partially, without the prior written permission of our company.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.