


Features

- IEEE 802.11b-compliant Wireless Standard
- Wireless LAN MAC Unit with ARM7TDMI™ RISC Processor
- Integrated 128-byte Transmit and 128-byte Receive FIFOs, for Wireless MAC Layer Functions
- Delivers Standard Wireless Networking to Any Host that Supports a Full-speed (12 Mbps) USB Interface
- Glueless SRAM Interface for All MAC Operations, Supporting up to 1M Byte of External Memory
- Integrated 6K x 32-bit Internal SRAM, Used for Fast Program Code Execution and Temporary Storage of Data
- Glueless Flash Memory Interface, Supporting up to 1M Bytes of Nonvolatile Memory for Permanent Storage of Program Code
- Wired Equivalent Privacy (WEP) in Hardware Supporting 64-bit and 128-bit Encryption
- The Integrated Physical Attachment Interface (PAI) Fully Supports Direct-sequence Spread Spectrum and Frequency-hopping Spread Spectrum Physical-layer Interfaces
- The WLAN and Inter-networking Functions can be Changed and Updated Easily to New Requirements Since They are Implemented in Micro Code
- Supports 11 Mbps Data Rate with Automatic Fallback to 5.5, 2 and 1 Mbps
- 128-lead, 14 x 14 mm TQFP Package
- Low-voltage Operation (3.3V)
- Internal ROM Contains Hardwired USB Control Software for Automatic Configuration when Card is Inserted in the USB Slot
- Device Firmware Upgrade is also Included in the Internal ROM for Downloading Firmware into Internal SRAM
- Offers SPI Interface and Five GPIO Pins
- AT76C503A Offers the Option to Download the Whole Code from SPI Flash

Block Diagram

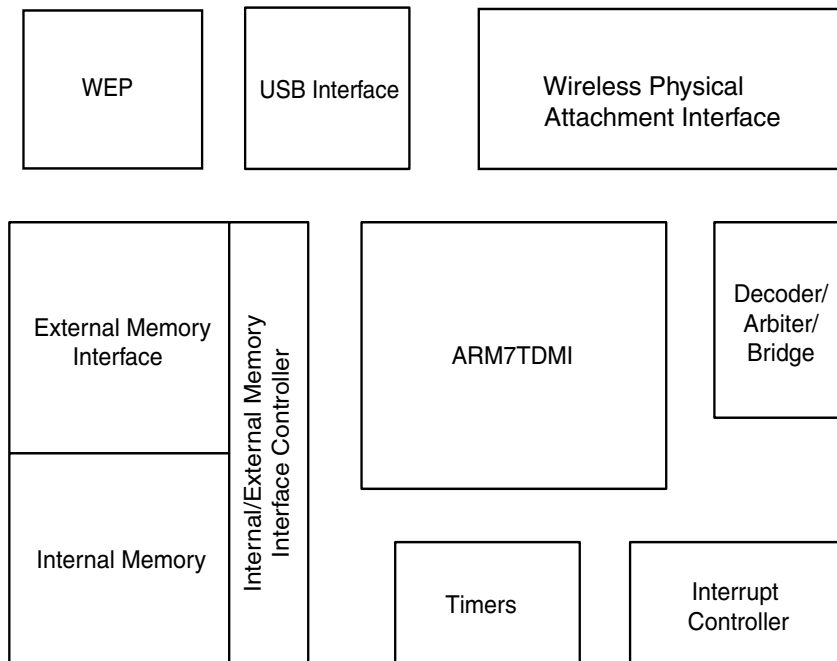

Universal Serial Bus 11-megabit WLAN Media Access Controller

AT76C503A

Summary

Rev. 1949CS-WLAN-06/02



Note: This is a summary document. A complete document is available under NDA. For more information, please contact your local Atmel sales office.

Description

AT76C503A is a single-chip controller that provides all processing and functionality needed for the MAC protocol of wireless LANs (focusing on, but not limited to the IEEE 802.11b standard). AT76C503A provides a glueless interface conforming to 12-Mbit Universal Serial Bus (USB) specification and can control a variety of wireless physical interfaces.

The AT76C503A chip contains a USB interface, a MAC control unit, and a PAI. The PAI supports 5.5- and 11-Mbit WLAN physical interfaces and the IEEE 802.11 (1 or 2 Mbps) direct-sequence spread spectrum and frequency-hopping spread spectrum physical interfaces, providing flexibility to end users.

The ARM7TDMI core supports two alternative instruction sets. Powerful 32-bit code can be executed by the processor in ARM® operating mode; however, a 16-bit instruction subset is also available in Thumb® mode. Thumb mode can be selected to exploit full processor power with limited external memory resources. Note that ARM7TDMI operating mode can be changed at run time with negligible overhead.



Atmel Headquarters

Corporate Headquarters

2325 Orchard Parkway
San Jose, CA 95131
TEL 1(408) 441-0311
FAX 1(408) 487-2600

Europe

Atmel Sarl
Route des Arsenaux 41
Case Postale 80
CH-1705 Fribourg
Switzerland
TEL (41) 26-426-5555
FAX (41) 26-426-5500

Asia

Room 1219
Chinachem Golden Plaza
77 Mody Road Tsimshatsui
East Kowloon
Hong Kong
TEL (852) 2721-9778
FAX (852) 2722-1369

Japan

9F, Tonetsu Shinkawa Bldg.
1-24-8 Shinkawa
Chuo-ku, Tokyo 104-0033
Japan
TEL (81) 3-3523-3551
FAX (81) 3-3523-7581

Atmel Operations

Memory

2325 Orchard Parkway
San Jose, CA 95131
TEL 1(408) 441-0311
FAX 1(408) 436-4314

Microcontrollers

2325 Orchard Parkway
San Jose, CA 95131
TEL 1(408) 441-0311
FAX 1(408) 436-4314

La Chantrerie
BP 70602
44306 Nantes Cedex 3, France
TEL (33) 2-40-18-18-18
FAX (33) 2-40-18-19-60

ASIC/ASSP/Smart Cards

Zone Industrielle
13106 Rousset Cedex, France
TEL (33) 4-42-53-60-00
FAX (33) 4-42-53-60-01

1150 East Cheyenne Mtn. Blvd.
Colorado Springs, CO 80906
TEL 1(719) 576-3300
FAX 1(719) 540-1759

Scottish Enterprise Technology Park
Maxwell Building
East Kilbride G75 0QR, Scotland
TEL (44) 1355-803-000
FAX (44) 1355-242-743

RF/Automotive

Theresienstrasse 2
Postfach 3535
74025 Heilbronn, Germany
TEL (49) 71-31-67-0
FAX (49) 71-31-67-2340

1150 East Cheyenne Mtn. Blvd.
Colorado Springs, CO 80906
TEL 1(719) 576-3300
FAX 1(719) 540-1759

Biometrics/Imaging/Hi-Rel MPU/ High Speed Converters/RF Datacom

Avenue de Rochepleine
BP 123
38521 Saint-Egreve Cedex, France
TEL (33) 4-76-58-30-00
FAX (33) 4-76-58-34-80

e-mail

literature@atmel.com

Web Site

<http://www.atmel.com>

© Atmel Corporation 2002.

Atmel Corporation makes no warranty for the use of its products, other than those expressly contained in the Company's standard warranty which is detailed in Atmel's Terms and Conditions located on the Company's web site. The Company assumes no responsibility for any errors which may appear in this document, reserves the right to change devices or specifications detailed herein at any time without notice, and does not make any commitment to update the information contained herein. No licenses to patents or other intellectual property of Atmel are granted by the Company in connection with the sale of Atmel products, expressly or by implication. Atmel's products are not authorized for use as critical components in life support devices or systems.

ATMEL® and DataFlash® are the registered trademark of Atmel.

ARM7TDMI®, ARM®, and Thumb® are the registered trademarks of ARM, Ltd. AMBA™ is the trademark of ARM, Ltd.

Microsoft®, Windows® 98/CE and Windows NT® are the registered trademarks of Microsoft Corporation; Sun-Solaris™ is trademark of Sun Corporation. Other terms and product names may be the trademarks of others.



Printed on recycled paper.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.