

CS92B  
CS92D  
CS92M  
CS92N

SILICON CONTROLLED RECTIFIER  
0.8 AMP, 200 THRU 800 VOLTS



TO-92 CASE

**Central**<sup>TM</sup>  
**Semiconductor Corp.**

**DESCRIPTION:**

The CENTRAL SEMICONDUCTOR CS92B series type is an epoxy molded Silicon Controlled Rectifier designed for sensing circuit applications and control systems.

**MARKING CODE: FULL PART NUMBER**

**MAXIMUM RATINGS:** ( $T_C=25^\circ\text{C}$  unless otherwise noted)

	<u>SYMBOL</u>	<u>CS92B</u>	<u>CS92D</u>	<u>CS92M</u>	<u>CS92N</u>	<u>UNITS</u>
Peak Repetitive Off-State Voltage	$V_{DRM}, V_{RRM}$	200	400	600	800	V
RMS On-State Current ( $T_C=90^\circ\text{C}$ )	$I_T(\text{RMS})$		0.8			A
Peak One Cycle Surge ( $t=10\text{ms}$ )	$I_{TSM}$		10			A
$I^2t$ Value for Fusing ( $t=10\text{ms}$ )	$I^2t$		0.24			A <sup>2</sup> s
Peak Gate Power ( $t_p=10\mu\text{s}$ )	$P_{GM}$		2.0			W
Average Gate Power Dissipation	$P_G (\text{AV})$		0.1			W
Peak Gate Current ( $t_p=10\mu\text{s}$ )	$I_{GM}$		1.0			A
Peak Gate Voltage ( $t_p=10\mu\text{s}$ )	$V_{GM}$		8.0			V
Storage Temperature	$T_{stg}$		-40 to +150			$^\circ\text{C}$
Junction Temperature	$T_J$		-40 to +125			$^\circ\text{C}$
Thermal Resistance	$\theta_{JA}$		200			$^\circ\text{C/W}$
Thermal Resistance	$\theta_{JC}$		100			$^\circ\text{C/W}$


**ELECTRICAL CHARACTERISTICS:** ( $T_C=25^\circ\text{C}$  unless otherwise noted)

<u>SYMBOL</u>	<u>TEST CONDITIONS</u>	<u>MIN</u>	<u>TYP</u>	<u>MAX</u>	<u>UNITS</u>
$I_{DRM}, I_{RRM}$	Rated $V_{DRM}, V_{RRM}, R_{GK}=1\text{K}\Omega$			1.0	$\mu\text{A}$
$I_{DRM}, I_{RRM}$	Rated $V_{DRM}, V_{RRM}, R_{GK}=1\text{K}\Omega, T_C=125^\circ\text{C}$			100	$\mu\text{A}$
$I_{GT}$	$V_D=12\text{V}$			200	$\mu\text{A}$
$I_H$	$I_T=100\text{mA}, R_{GK}=1\text{K}\Omega$			5.0	mA
$V_{GT}$	$V_D=12\text{V}$			0.8	V
$V_{TM}$	$I_{TM}=1.0\text{A}, t_p=380\mu\text{s}$			1.7	V
dv/dt	$V_D=2/3 V_{DRM}, R_{GK}=1\text{K}\Omega, T_C=125^\circ\text{C}$	25			V/ $\mu\text{s}$

R3 (22-April 2004)

**SILICON CONTROLLED RECTIFIER**  
**0.8 AMP, 200 THRU 800 VOLTS**

**TO-92 CASE - MECHANICAL OUTLINE**

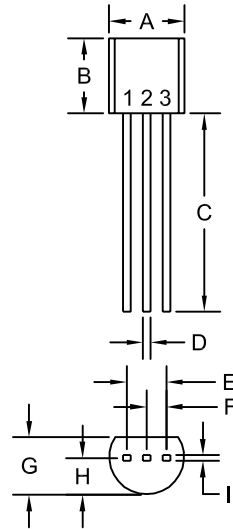

R1

**LEAD CODE:**

- 1) CATHODE
- 2) GATE
- 3) ANODE

**MARKING CODE:**

**FULL PART NUMBER**

SYMBOL	DIMENSIONS			
	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A (DIA)	0.175	0.205	4.45	5.21
B	0.170	0.210	4.32	5.33
C	0.500	-	12.70	-
D	0.016	0.022	0.41	0.56
E	0.100		2.54	
F	0.050		1.27	
G	0.125	0.165	3.18	4.19
H	0.080	0.105	2.03	2.67
I	0.015		0.38	

TO-92 (REV: R1)

R3 (22-April 2004)



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

**[LittleDiode.com](http://LittleDiode.com)**

Looking forward to providing you with the best possible service.