

DATA SHEET

For a complete data sheet, please also download:

- The IC06 74HC/HCT/HCU/HCMOS Logic Family Specifications
- The IC06 74HC/HCT/HCU/HCMOS Logic Package Information
- The IC06 74HC/HCT/HCU/HCMOS Logic Package Outlines

74HC/HCT354

**8-input multiplexer/register with
transparent latches; 3-state**

Product specification
File under Integrated Circuits, IC06

December 1990

8-input multiplexer/register with transparent latches; 3-state

74HC/HCT354

FEATURES

- Transparent data latches
- Transparent address latch
- Easily expanding
- Complementary outputs
- Output capability: bus driver
- I_{CC} category: MSI

GENERAL DESCRIPTION

The 74HC/HCT354 are high-speed Si-gate CMOS devices and are pin compatible with low power Schottky TTL

(LSTTL). They are specified in compliance with JEDEC standard no. 7A.

The 74HC/HCT354 data selectors/multiplexers contain full on-chip binary decoding, to select one-of-eight data sources. The data select address is stored in transparent latches that are enabled by a LOW on the latch enable input (\overline{LE}).

The transparent 8-bit data latches are enabled when the active LOW data enable input (\overline{E}) is LOW. When the output enable input $\overline{OE}_1 = \text{HIGH}$, $\overline{OE}_2 = \text{HIGH}$ or $\overline{OE}_3 = \text{LOW}$, the outputs go to the high impedance OFF-state.

Operation of these output enable inputs does not affect the state of the latches.

QUICK REFERENCE DATA

GND = 0 V; T_{amb} = 25 °C; t_r = t_f = 6 ns

SYMBOL	PARAMETER	CONDITIONS	TYPICAL		UNIT
			HC	HCT	
t _{PHL} / t _{PLH}	propagation delay	C _L = 15 pF; V _{CC} = 5 V			
	D _n , \overline{E} to Y, \overline{Y}		20	22	ns
	S _n , \overline{LE} to Y, \overline{Y}		24	27	ns
C _I	input capacitance		3.5	3.5	pF
C _{PD}	power dissipation capacitance per latch	notes 1 and 2	68	71	pF

Notes

1. C_{PD} is used to determine the dynamic power dissipation (P_D in μW):

$$P_D = C_{PD} \times V_{CC}^2 \times f_i + \sum (C_L \times V_{CC}^2 \times f_o) \text{ where:}$$

f_i = input frequency in MHz

f_o = output frequency in MHz

∑ (C_L × V_{CC}² × f_o) = sum of outputs

C_L = output load capacitance in pF

V_{CC} = supply voltage in V

2. For HC the condition is V_I = GND to V_{CC}
For HCT the condition is V_I = GND to V_{CC} – 1.5 V

ORDERING INFORMATION




See "74HC/HCT/HCU/HCMOS Logic Package Information".

8-input multiplexer/register with transparent latches; 3-state

74HC/HCT354

PIN DESCRIPTION

PIN NO.	SYMBOL	NAME AND FUNCTION
8, 7, 6, 5, 4, 3, 2, 1	D ₀ to D ₇	data inputs
9	\bar{E}	data enable input (active LOW)
10	GND	ground (0 V)
11	\bar{LE}	address latch enable inputs (active LOW)
14, 13, 12	S ₀ , S ₁ , S ₂	select inputs
15, 16	\overline{OE}_1 , \overline{OE}_2	output enable input (active LOW)
17	OE ₃	output enable input (active HIGH)
18	\bar{Y}	3-state multiplexer output (active LOW)
19	Y	3-state multiplexer output (active HIGH)
20	V _{CC}	positive supply voltage

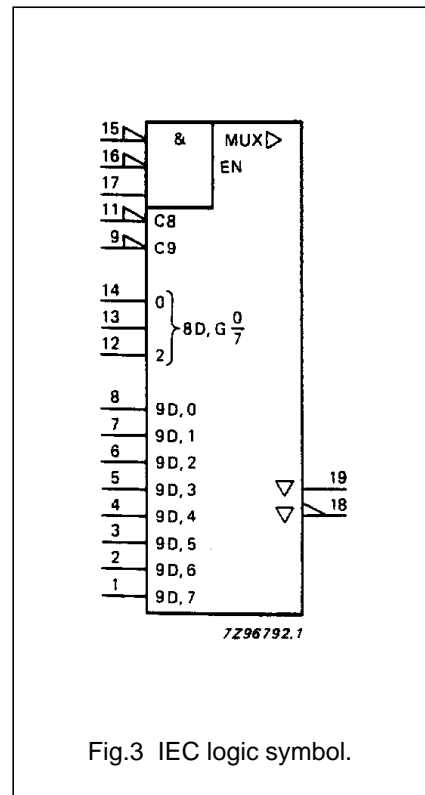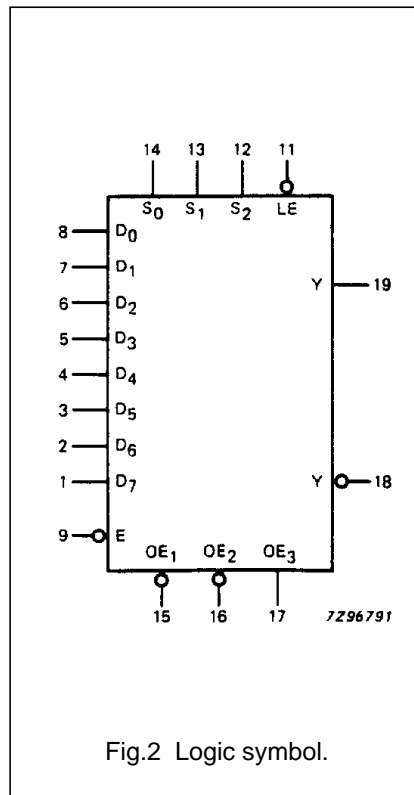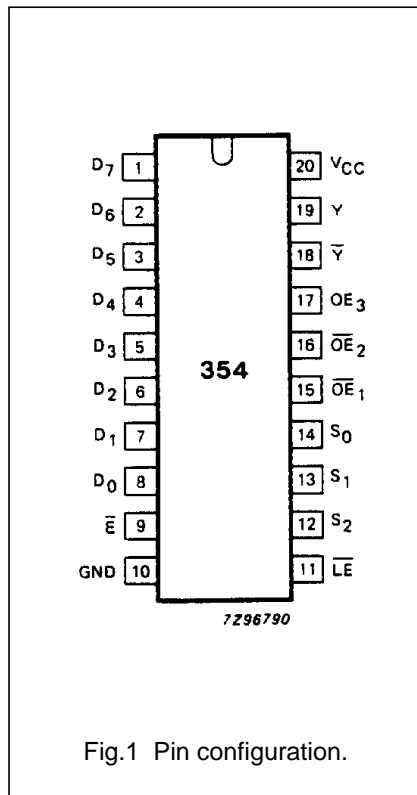

8-input multiplexer/register with
transparent latches; 3-state

74HC/HCT354

FUNCTION TABLE

INPUTS							OUTPUTS		DESCRIPTION
ADDRESS ⁽¹⁾			\overline{E}	OUTPUT ENABLE			Y	\overline{Y}	
S ₂	S ₁	S ₀		\overline{OE}_1	\overline{OE}_2	OE ₃			
X	X	X	X	H	X	X	Z	Z	outputs in high impedance OFF-state
X	X	X	X	X	H	X	Z	Z	
X	X	X	X	X	X	L	Z	Z	
L	L	L	L	L	L	H	D ₀	\overline{D}_0	data latch is transparent
L	L	H	L	L	L	H	D ₁	\overline{D}_1	
L	H	L	L	L	L	H	D ₂	\overline{D}_2	
L	H	H	L	L	L	H	D ₃	\overline{D}_3	
H	L	L	L	L	L	H	D ₄	\overline{D}_4	
H	L	H	L	L	L	H	D ₅	\overline{D}_5	
H	H	L	L	L	L	H	D ₆	\overline{D}_6	
H	H	H	L	L	L	H	D ₇	\overline{D}_7	
L	L	L	H	L	L	H	D _{0n}	\overline{D}_{0n}	data is latched
L	L	H	H	L	L	H	D _{1n}	\overline{D}_{1n}	
L	H	L	H	L	L	H	D _{2n}	\overline{D}_{2n}	
L	H	H	H	L	L	H	D _{3n}	\overline{D}_{3n}	
H	L	L	H	L	L	H	D _{4n}	\overline{D}_{4n}	
H	L	H	H	L	L	H	D _{5n}	\overline{D}_{5n}	
H	H	L	H	L	L	H	D _{6n}	\overline{D}_{6n}	
H	H	H	H	L	L	H	D _{7n}	\overline{D}_{7n}	

Notes

- This column shows the input address set-up with $\overline{LE} = \text{LOW}$ (address latch is transparent).
- D₀ to D₇ = data at inputs D₀ to D₇
D_{0n} to D_{7n} = data at inputs D₀ to D₇ before the most recent LOW-to-HIGH transition of \overline{E}
H = HIGH voltage level
L = LOW voltage level
X = don't care
Z = high impedance OFF-state

8-input multiplexer/register with transparent latches; 3-state

74HC/HCT354

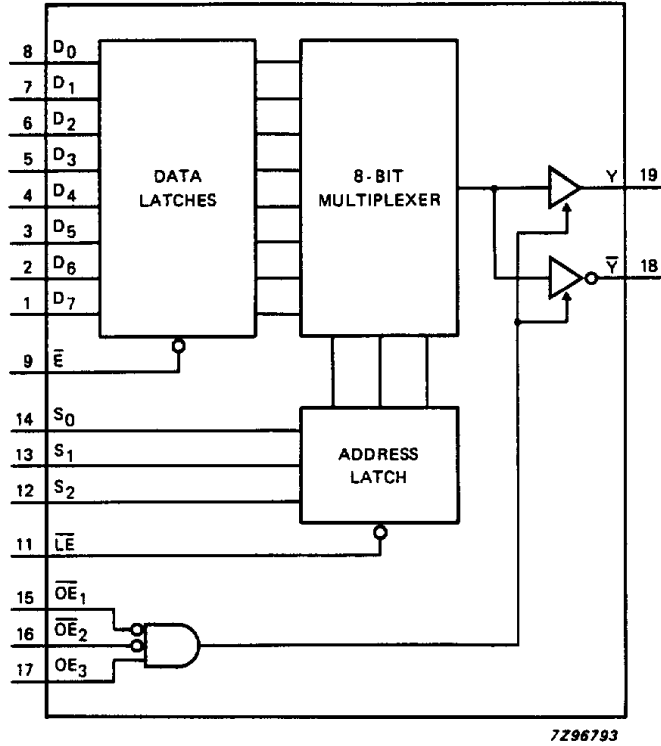


Fig.4 Functional diagram.

8-input multiplexer/register with transparent latches; 3-state

74HC/HCT354

DC CHARACTERISTICS FOR 74HC

For the DC characteristics see *"74HC/HCT/HCU/HCMOS Logic Family Specifications"*.

Output capability: bus driver

I_{CC} category: MSI

AC CHARACTERISTICS FOR 74HC

GND = 0 V; t_r = t_f = 6 ns; C_L = 50 pF

SYMBOL	PARAMETER	T _{amb} (°C)						UNIT	TEST CONDITIONS		
		74HC							V _{CC} (V)	WAVEFORMS	
		+25			-40 to +85		-40 to +125				
		min.	typ.	max.	min.	max.	min.				max.
t _{PHL} / t _{PLH}	propagation delay D _n to Y, \bar{Y}		61 22 18	210 42 36		265 53 45		315 63 54	ns	2.0 4.5 6.0	Fig.7
t _{PHL} / t _{PLH}	propagation delay E to Y, \bar{Y}		63 23 18	250 50 43		315 63 54		375 75 64	ns	2.0 4.5 6.0	Fig.6
t _{PHL} / t _{PLH}	propagation delay S _n to Y, \bar{Y}		77 28 22	260 52 44		325 65 55		390 78 66	ns	2.0 4.5 6.0	Fig.8
t _{PHL} / t _{PLH}	propagation delay \overline{LE} to Y, \bar{Y}		77 28 22	290 58 49		365 73 62		435 87 74	ns	2.0 4.5 6.0	Fig.9
t _{PZH} / t _{PZL}	3-state output enable time OE _n to Y, \bar{Y}		39 14 11	125 25 21		155 31 26		190 38 32	ns	2.0 4.5 6.0	Fig.10
t _{PZH} / t _{PZL}	3-state output enable time OE ₃ to Y, \bar{Y}		44 16 13	135 27 23		170 34 29		205 41 35	ns	2.0 4.5 6.0	Fig.10
t _{PHZ} / t _{PLZ}	3-state output disable time OE _n to Y, \bar{Y}		50 18 14	155 31 26		195 39 33		235 47 40	ns	2.0 4.5 6.0	Fig.10
t _{PHZ} / t _{PLZ}	3-state output disable time OE ₃ to Y, \bar{Y}		55 20 16	155 31 26		195 39 33		235 47 40	ns	2.0 4.5 6.0	Fig.10
t _{THL} / t _{TLH}	output transition time		14 5 4	60 12 10		75 15 13		90 18 15	ns	2.0 4.5 6.0	Figs 7, 8 and 9
t _w	data enable pulse width \bar{E} LOW	80 16 14	17 6 5		100 20 17		120 24 20		ns	2.0 4.5 6.0	Fig.6
t _w	latch enable pulse width \bar{LE} LOW	80 16 14	17 6 5		100 20 17		120 24 20		ns	2.0 4.5 6.0	Fig.9

8-input multiplexer/register with
transparent latches; 3-state

74HC/HCT354

SYMBOL	PARAMETER	T _{amb} (°C)						UNIT	TEST CONDITIONS		
		74HC							V _{CC} (V)	WAVEFORMS	
		+25			-40 to +85		-40 to +125				
		min.	typ.	max.	min.	max.	min.				max.
t _{su}	set-up time D _n to \overline{E}	50 10 9	11 4 3		65 13 11		75 15 13		ns	2.0 4.5 6.0	Fig.10
t _{su}	set-up time S _n to \overline{LE}	50 10 9	14 5 4		65 13 11		75 15 13		ns	2.0 4.5 6.0	Fig.10
t _h	hold time D _n to \overline{E}	5 5 5	-6 -2 -2		5 5 5		5 5 5		ns	2.0 4.5 6.0	Fig.11
t _h	hold time S _n to \overline{LE}	5 5 5	-8 -3 -2		5 5 5		5 5 5		ns	2.0 4.5 6.0	Fig.10

**8-input multiplexer/register with
transparent latches; 3-state**

74HC/HCT354**DC CHARACTERISTICS FOR 74HCT**

For the DC characteristics see *"74HC/HCT/HCU/HCMOS Logic Family Specifications"*.

Output capability: bus driver

I_{CC} category: MSI

Note to HCT types

The value of additional quiescent supply current (ΔI_{CC}) for a unit load of 1 is given in the family specifications. To determine ΔI_{CC} per input, multiply this value by the unit load coefficient shown in the table below.

INPUT	UNIT LOAD COEFFICIENT
D _n , S _n	0.2
OE ₃	0.25
\overline{LE}	0.5
\overline{E} , \overline{OE}_n	1.0

8-input multiplexer/register with
transparent latches; 3-state

74HC/HCT354

AC CHARACTERISTICS FOR 74HCT

GND = 0 V; $t_r = t_f = 6$ ns; $C_L = 50$ pF

SYMBOL	PARAMETER	T _{amb} (°C)						UNIT	TEST CONDITIONS		
		74HCT							V _{CC} (V)	WAVEFORMS	
		+25			-40 to +85		-40 to +125				
		min.	typ.	max.	min.	max.	min.				max.
t _{PHL} / t _{PLH}	propagation delay D _n to Y, \bar{Y}		25	47		59		71	ns	4.5	Fig.7
t _{PHL} / t _{PLH}	propagation delay \bar{E} to Y, \bar{Y}		26	54		68		81	ns	4.5	Fig.6
t _{PHL} / t _{PLH}	propagation delay S _n to Y, \bar{Y}		30	59		74		89	ns	4.5	Fig.8
t _{PHL} / t _{PLH}	propagation delay \bar{LE} to Y, \bar{Y}		31	63		79		95	ns	4.5	Fig.9
t _{PZH} / t _{PZL}	3-state output enable time \bar{OE}_n to Y, \bar{Y}		18	34		43		51	ns	4.5	Fig.10
t _{PZH} / t _{PZL}	3-state output enable time OE ₃ to Y, \bar{Y}		18	34		43		51	ns	4.5	Fig.10
t _{PHZ} / t _{PLZ}	3-state output disable time \bar{OE}_n to Y, \bar{Y}		18	33		41		50	ns	4.5	Fig.10
t _{PHZ} / t _{PLZ}	3-state output disable time OE ₃ to Y, \bar{Y}		21	39		49		59	ns	4.5	Fig.10
t _{THL} / t _{TLH}	output transition time		5	12		15		18	ns	4.5	Figs 7, 8 and 9
t _W	data enable pulse width \bar{E} LOW	16	6		20		24		ns	4.5	Fig.6
t _W	latch enable pulse width \bar{LE} LOW	16	6		20		24		ns	4.5	Fig.9
t _{su}	set-up time D _n to \bar{E}	10	4		13		15		ns	4.5	Fig.11
t _{su}	set-up time S _n to \bar{LE}	10	5		13		15		ns	4.5	Fig.10
t _h	hold time D _n to \bar{E}	9	0		11		14		ns	4.5	Fig.11
t _h	hold time S _n to \bar{LE}	9	-3		11		14		ns	4.5	Fig.10

8-input multiplexer/register with transparent latches; 3-state

74HC/HCT354

AC WAVEFORMS

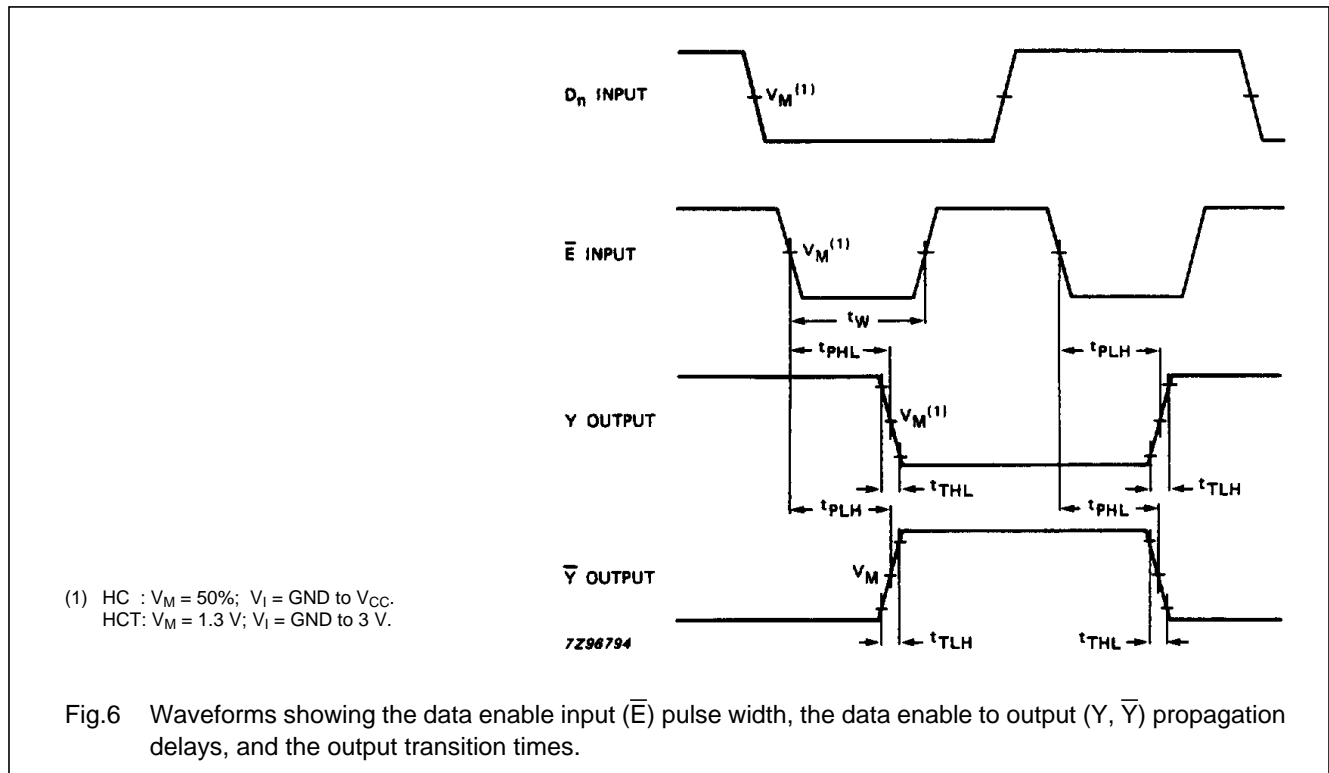


Fig.6 Waveforms showing the data enable input (\bar{E}) pulse width, the data enable to output (Y , \bar{Y}) propagation delays, and the output transition times.



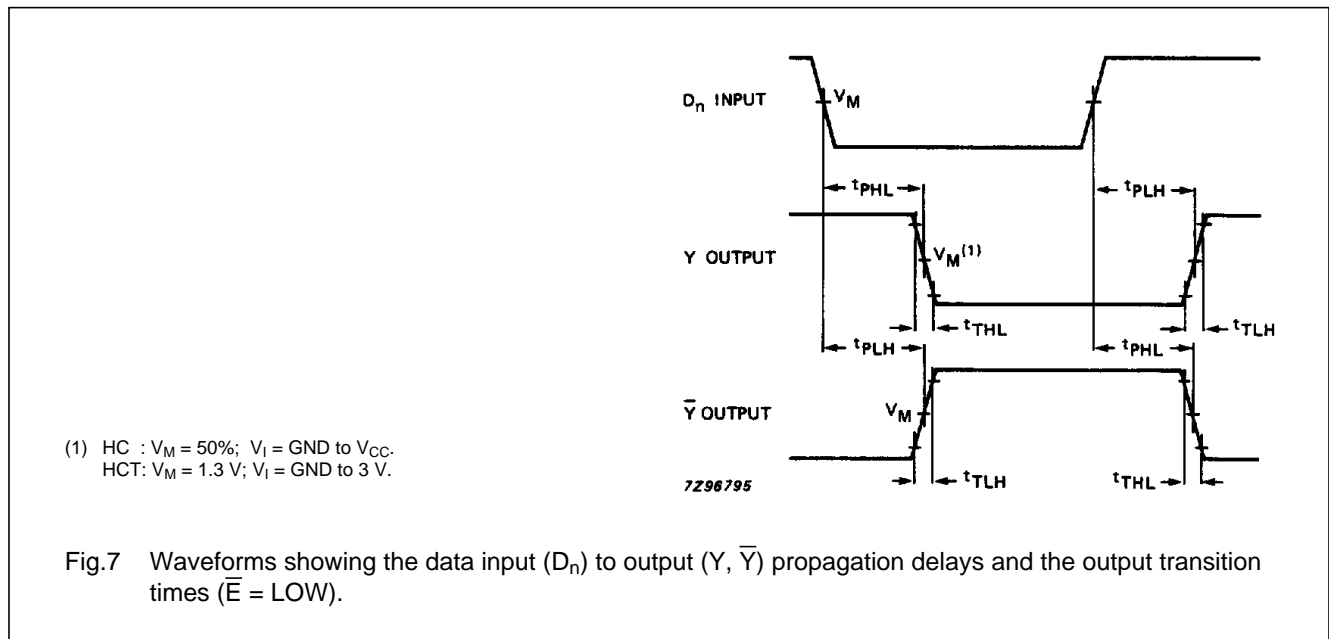


Fig.7 Waveforms showing the data input (D_n) to output (Y , \bar{Y}) propagation delays and the output transition times ($\bar{E} = \text{LOW}$).




8-input multiplexer/register with transparent latches; 3-state

74HC/HCT354

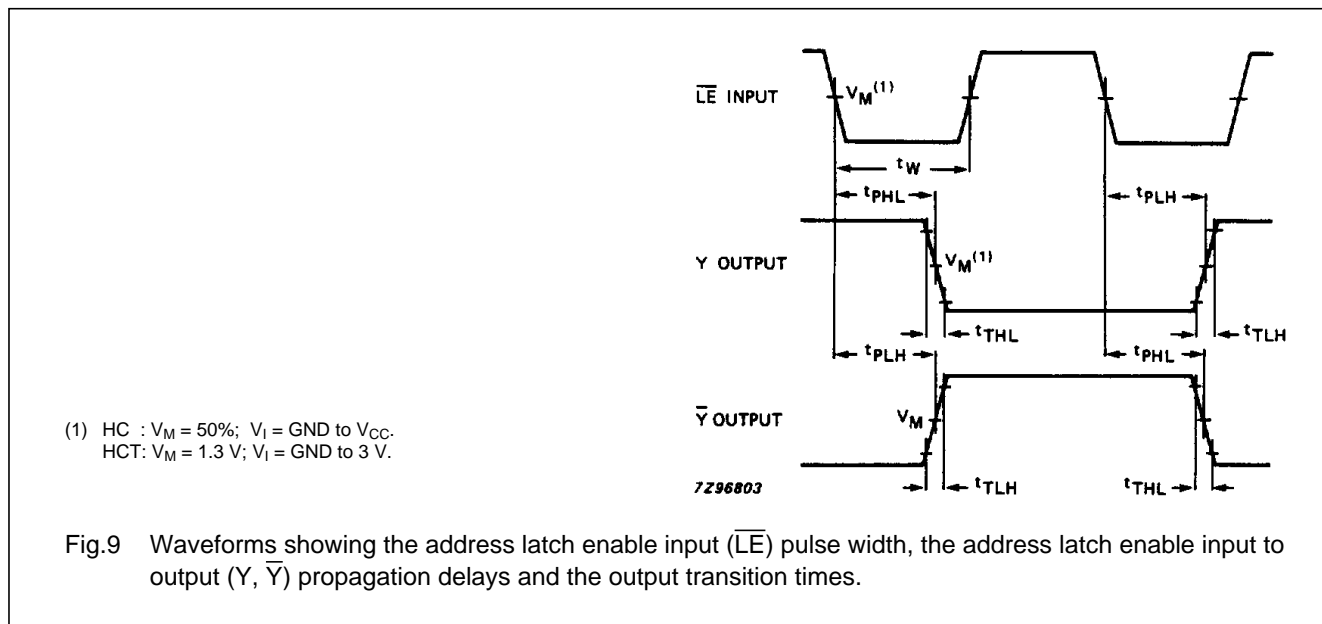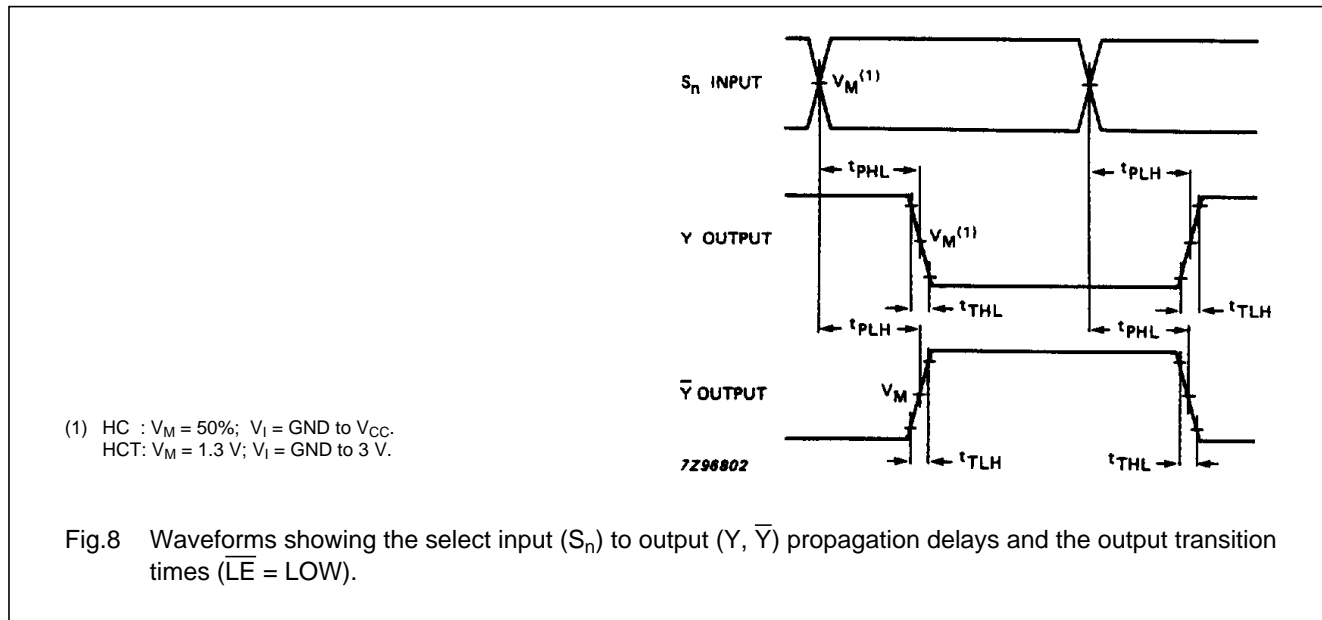

8-input multiplexer/register with transparent latches; 3-state

74HC/HCT354

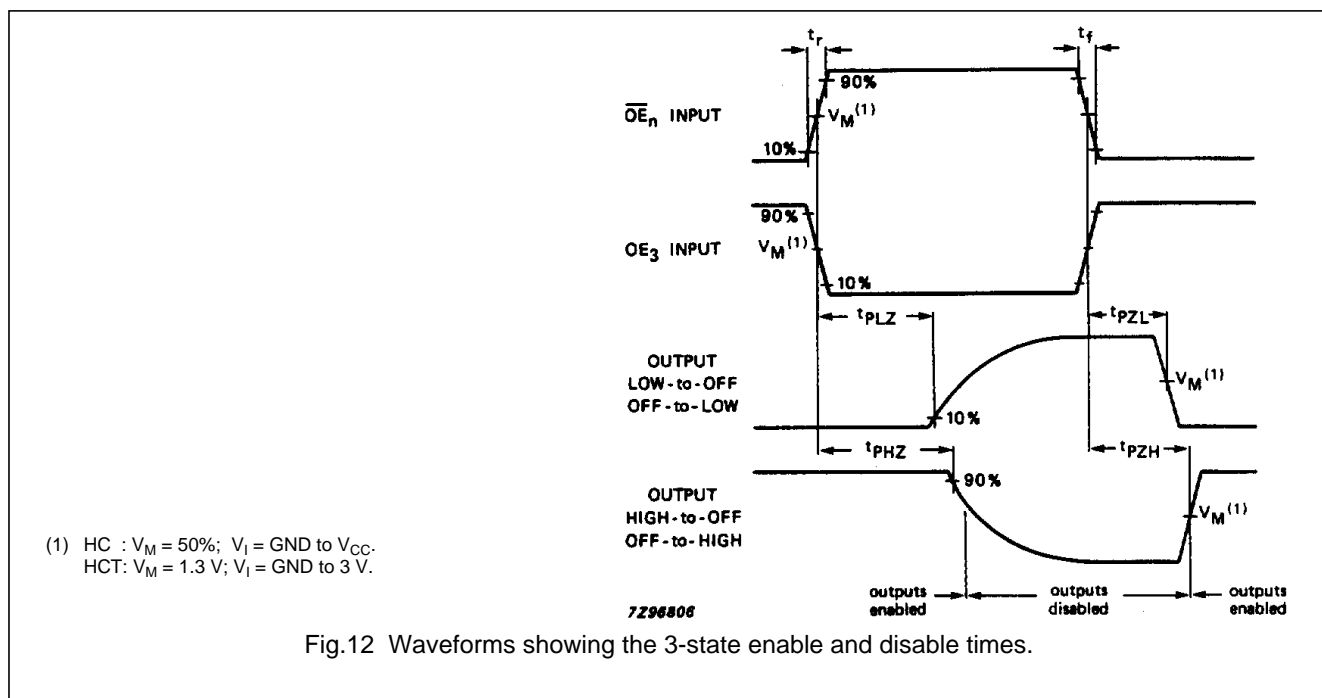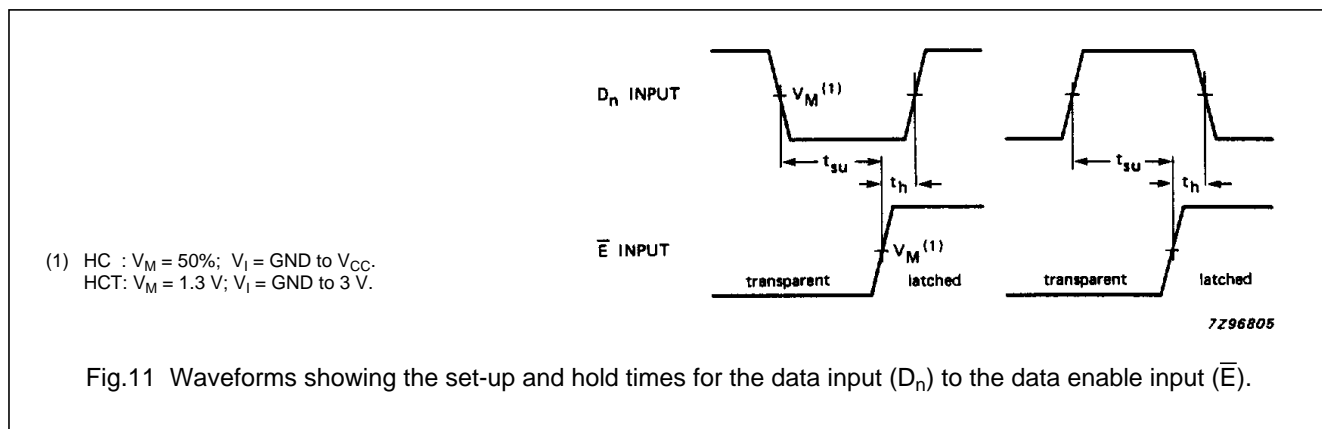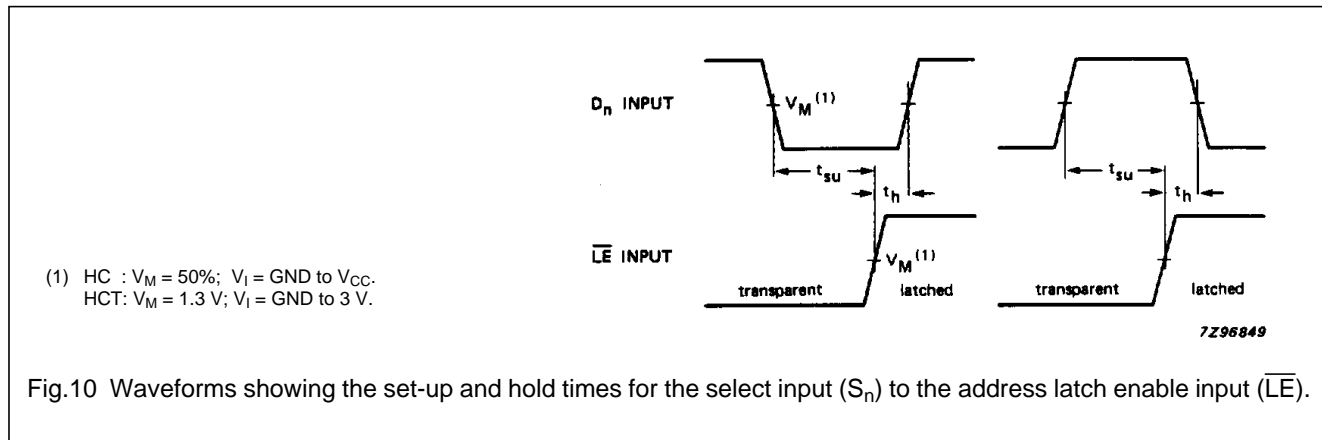

8-input multiplexer/register with
transparent latches; 3-state

74HC/HCT354

PACKAGE OUTLINES

See *"74HC/HCT/HCU/HCMOS Logic Package Outlines"*.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.