


PNP Silicon AF Power Transistors

- For AF driver and output stages
- High current gain
- Low collector-emitter saturation voltage
- Complementary types: BDP951...BDP955 (NPN)

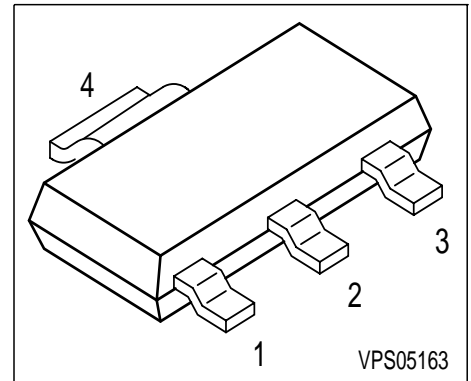

Type	Marking	Pin Configuration				Package
BDP952	BDP 952	1 = B	2 = C	3 = E	4 = C	SOT223
BDP954	BDP 954	1 = B	2 = C	3 = E	4 = C	SOT223
BDP956	BDP 956	1 = B	2 = C	3 = E	4 = C	SOT223

Maximum Ratings

Parameter	Symbol	BDP952	BDP954	BDP956	Unit
Collector-emitter voltage	V_{CEO}	80	100	120	V
Collector-base voltage	V_{CBO}	100	120	140	
Emitter-base voltage	V_{EBO}	5	5	5	
DC collector current	I_C	3			A
Peak collector current	I_{CM}	5			
Base current	I_B	200			mA
Peak base current	I_{BM}	500			
Total power dissipation, $T_S = 99\text{ °C}$	P_{tot}	3			W
Junction temperature	T_j	150			°C
Storage temperature	T_{stg}	-65 ... 150			

Thermal Resistance

Junction - soldering point ¹⁾	R_{thJS}	≤17	K/W
--	------------	-----	-----


¹⁾For calculation of R_{thJA} please refer to Application Note Thermal Resistance

Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified.


Parameter	Symbol	Values			Unit
		min.	typ.	max.	
DC Characteristics					
Collector-emitter breakdown voltage $I_C = 10\text{ mA}, I_B = 0$	$V_{(BR)CEO}$				V
BDP952		80	-	-	
BDP954		100	-	-	
BDP956		120	-	-	
Collector-base breakdown voltage $I_C = 100\ \mu\text{A}, I_B = 0$	$V_{(BR)CBO}$				
BDP952		100	-	-	
BDP954		120	-	-	
BDP956		140	-	-	
Emitter-base breakdown voltage $I_E = 10\ \mu\text{A}, I_C = 0$	$V_{(BR)EBO}$	5	-	-	
Collector cutoff current $V_{CB} = 100\text{ V}, I_E = 0$	I_{CBO}	-	-	100	nA
Collector cutoff current $V_{CB} = 100\text{ V}, I_E = 0, T_A = 150\ ^\circ\text{C}$	I_{CBO}	-	-	20	μA
Emitter cutoff current $V_{EB} = 4\text{ V}, I_C = 0$	I_{EBO}	-	-	100	nA
DC current gain 1) $I_C = 10\text{ mA}, V_{CE} = 5\text{ V}$ $I_C = 500\text{ mA}, V_{CE} = 1\text{ V}$ $I_C = 2\text{ A}, V_{CE} = 2\text{ V}$	h_{FE}	25 40 15	- - -	- 475 -	-
Collector-emitter saturation voltage 1) $I_C = 2\text{ A}, I_B = 0.2\text{ A}$	V_{CEsat}	-	-	0.8	V
Base-emitter saturation voltage 1) $I_C = 2\text{ A}, I_B = 0.2\text{ A}$	V_{BEsat}	-	-	1.5	
AC Characteristics					
Transition frequency $I_C = 50\text{ mA}, V_{CE} = 10\text{ V}, f = 100\text{ MHz}$	f_T	-	100	-	MHz
Collector-base capacitance $V_{CB} = 10\text{ V}, f = 1\text{ MHz}$	C_{cb}	-	40	-	pF

 1) Pulse test: $t \leq 300\ \mu\text{s}$, $D = 2\%$

Total power dissipation $P_{tot} = f(T_S)$

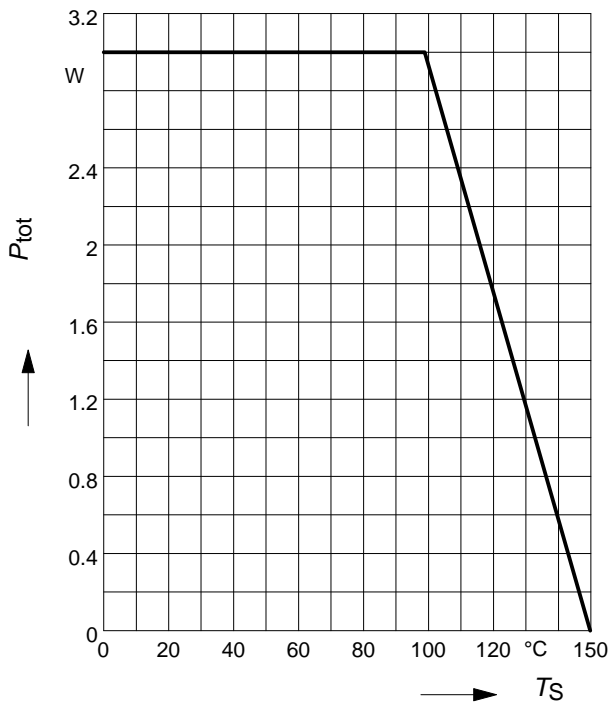


Permissible Pulse Load $R_{thJS} = f(t_p)$

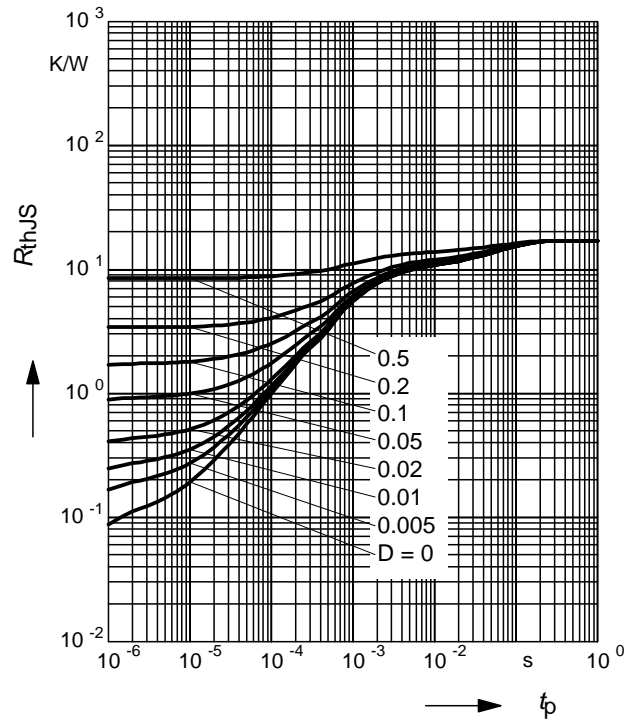


Permissible Pulse Load

$P_{totmax} / P_{totDC} = f(t_p)$

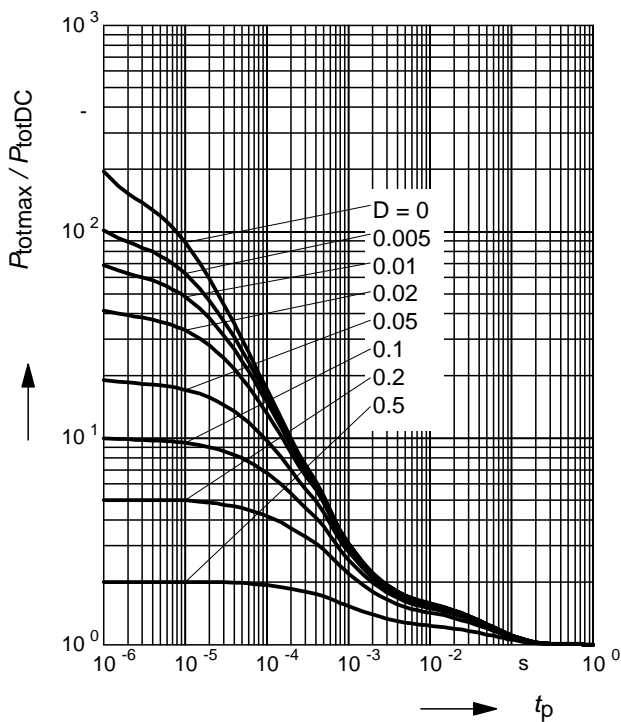


DC current gain $h_{FE} = f(I_C)$

$V_{CE} = 2V$

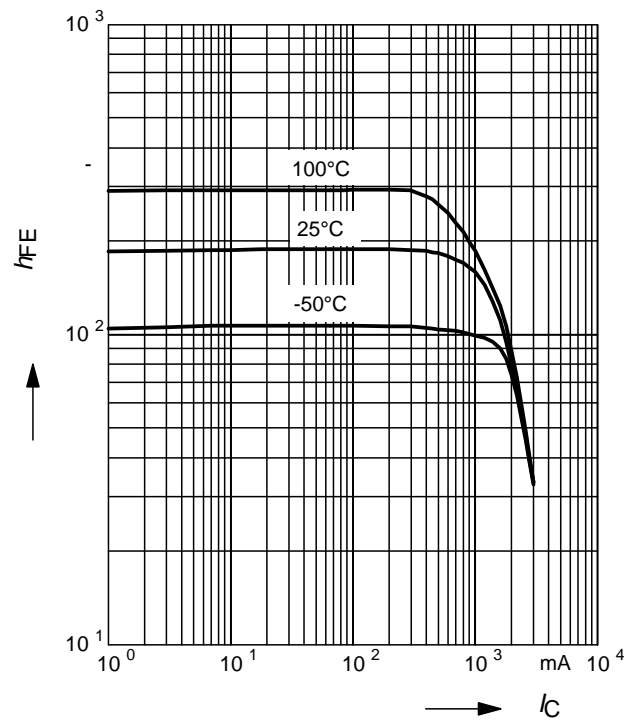


Collector cutoff current $I_{CBO} = f(T_A)$

$V_{CB} = 45V$

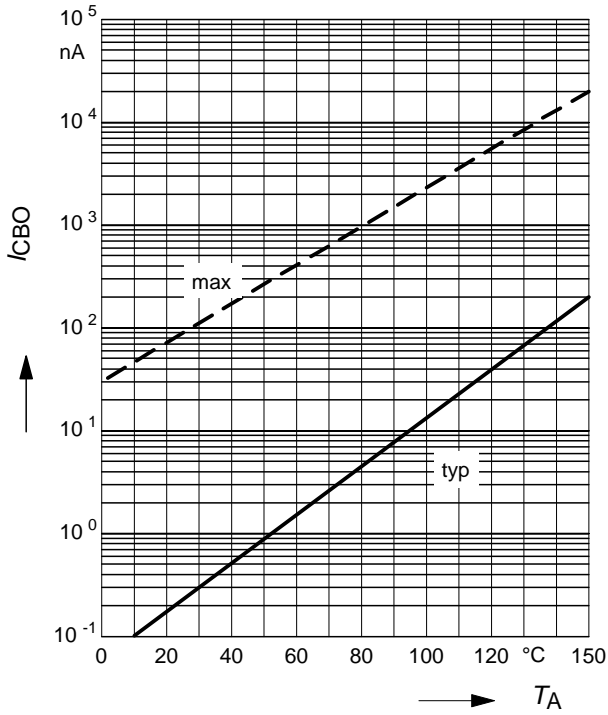


Collector-emitter saturation voltage

$I_C = f(V_{CEsat}), h_{FE} = 10$

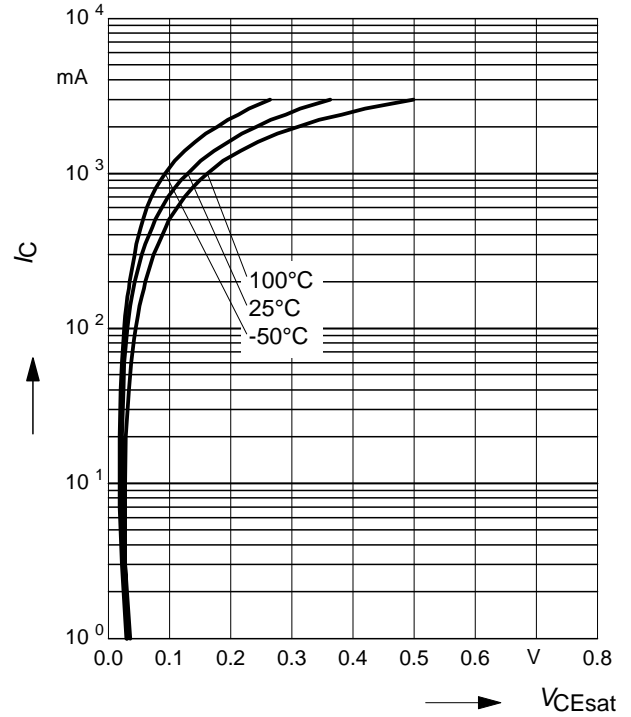


Base-emitter saturation voltage

$I_C = f(V_{BEsat}), h_{FE} = 10$

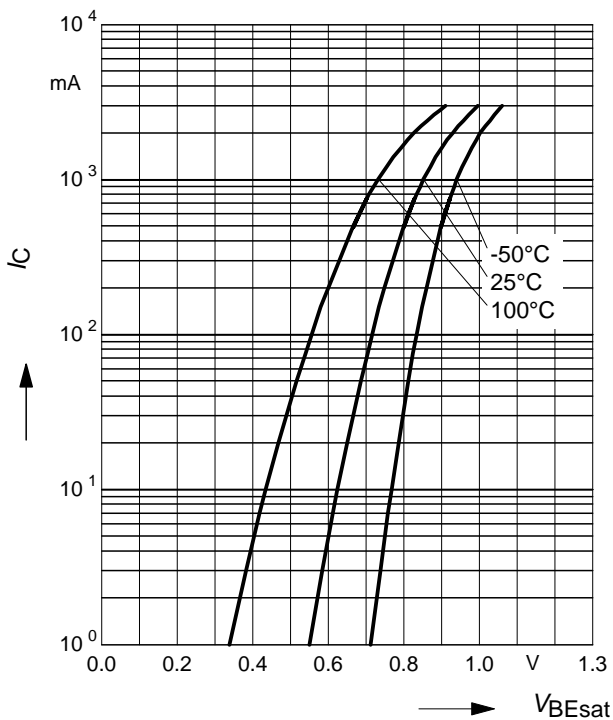

Collector current $I_C = f(V_{BE})$

$V_{CE} = 2V$

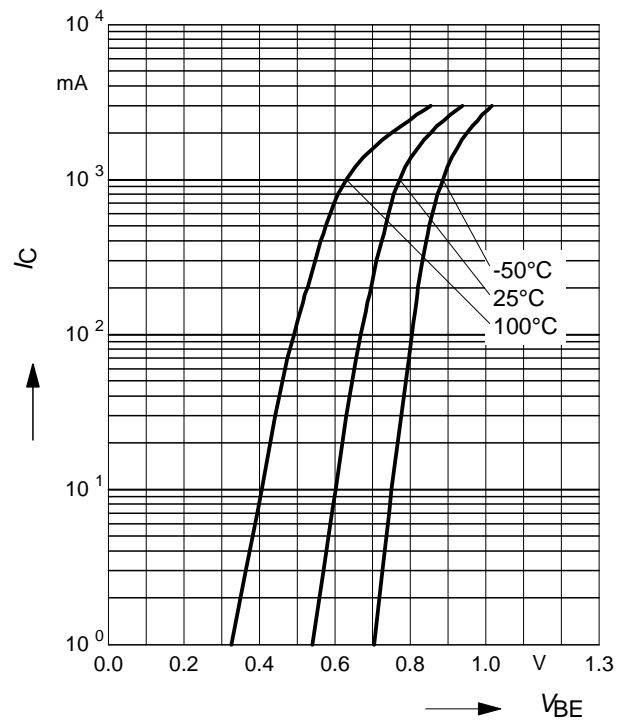



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.