
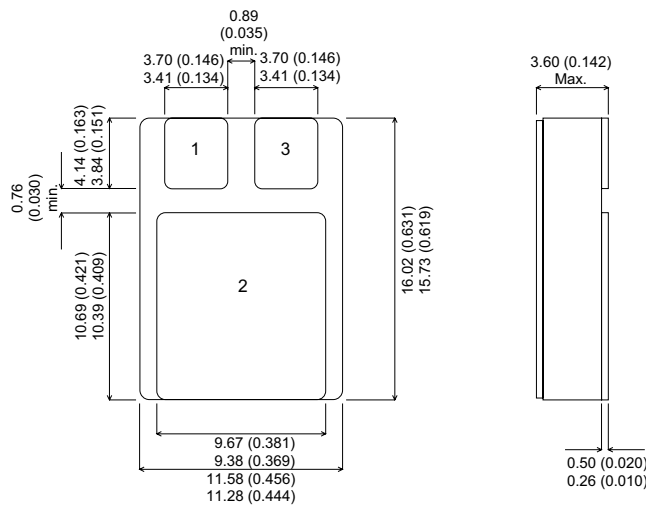


MECHANICAL DATA
 Dimensions in mm

**SILICON PNP
 EPITAXIAL BASE IN
 TO220 METAL AND
 SMD1 CERAMIC SURFACE
 MOUNT PACKAGES**

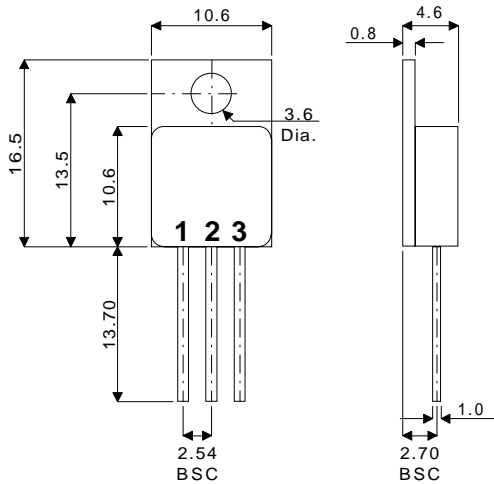

FEATURES

- HERMETIC METAL OR CERAMIC PACKAGES
- HIGH RELIABILITY
- MILITARY AND SPACE OPTIONS
- SCREENING TO CECC LEVELS
- FULLY ISOLATED (METAL VERSION)

APPLICATIONS

- POWER LINEAR AND SWITCHING APPLICATIONS
- GENERAL PURPOSE POWER

TO220M - TO220 Metal Package - Isolated
SMD1 - SMD1 Ceramic Surface Mount Package

Pin 1 – Base **Pin 2** – Collector **Pin 3** – Emitter

ABSOLUTE MAXIMUM RATINGS ($T_{case}=25^{\circ}C$ unless otherwise stated)		BDS18	BDS19
V_{CBO}	Collector - Base voltage ($I_E = 0$)	-120V	-150V
V_{CEO}	Collector - Emitter voltage ($I_B = 0$)	-120V	-150V
V_{EBO}	Emitter - Base voltage ($I_C = 0$)	-5V	
I_E, I_C	Emitter, Collector current	-8A	
I_B	Base current	-2A	
P_{tot}	Total power dissipation at $T_{case} \leq 75^{\circ}C$	50W	
T_{stg}	Storage Temperature	-65 TO 200°C	
T_j	Junction Temperature	200°C	

ELECTRICAL CHARACTERISTICS ($T_{case} = 25^{\circ}C$ unless otherwise stated)

Parameter	Test Conditions	Min.	Typ.	Max.	Unit
I_{CBO}	Collector cut-off current ($I_E = 0$)	BDS18 $V_{CB} = -120V$ BDS19 $V_{CB} = -150V$			μA
I_{CEO}	Collector cut-off current ($I_B = 0$)	BDS18 $V_{CE} = -60V$ BDS19 $V_{CE} = -75V$			mA
I_{EBO}	Emitter cut-off current ($I_C = 0$)	$V_{EB} = -5V$			μA
$V_{CEO(sus)^*}$	Collector - Emitter sustaining voltage ($I_B = 0$)	BDS18 BDS19 $I_C = -100mA$	-120 -150		V
$V_{CE(sat)^*}$	Collector - Emitter saturation voltage	$I_C = -1A$ $I_B = -0.1A$		-0.5	V
$V_{BE(on)^*}$	Base - Emitter voltage	$I_C = -1A$ $V_{CE} = -2V$		-1.0	V
h_{FE}^*	DC Current gain	$I_C = -0.5A$ $V_{CE} = -2V$ $I_C = -4A$ $V_{CE} = -2V$	40 15	250 150	
f_T	Transition frequency	$I_C = -0.5A$ $V_{CE} = -10V$	30		MHz






*Pulsed : Pulse duration = 300 μs , duty cycle = 1.5%

SWITCHING CHARACTERISTICS

Parameter	Test Conditions	Max.	Unit
t_{on}	On Time ($t_d + t_r$)	0.5	μs
t_s	Storage Time	1.5	μs
t_f	Fall Time	0.3	μs

THERMAL DATA

$R_{THj-case}$	Thermal resistance junction - case	Max. 2.5°C/W
R_{THj-a}	Thermal resistance junction - ambient	Max. 62.5°C/W

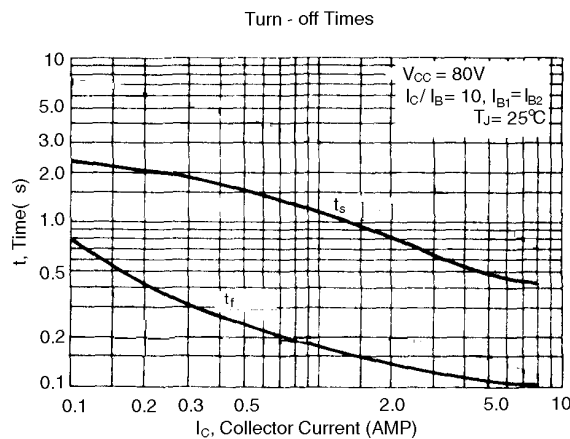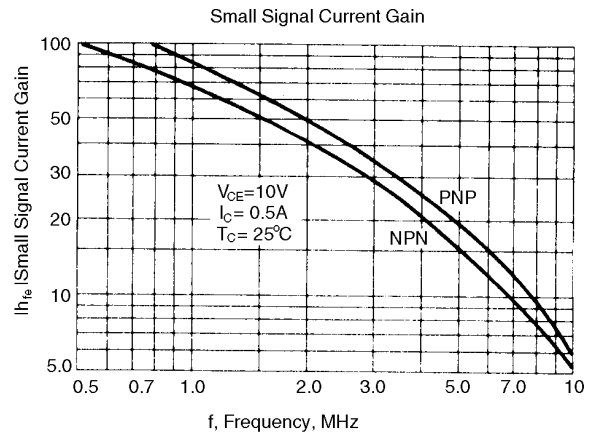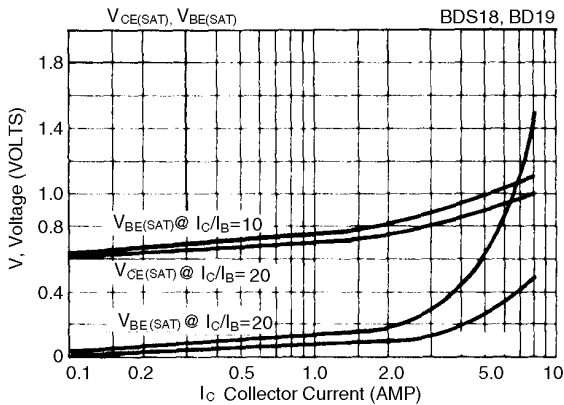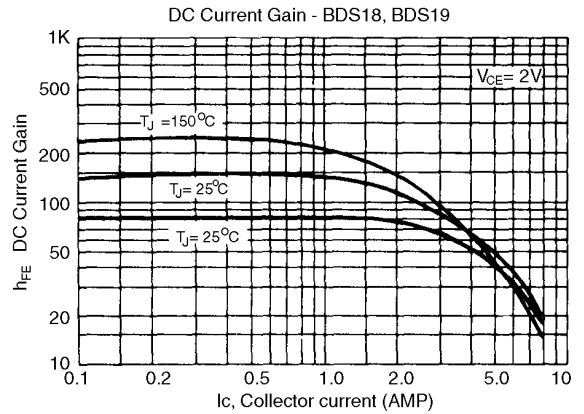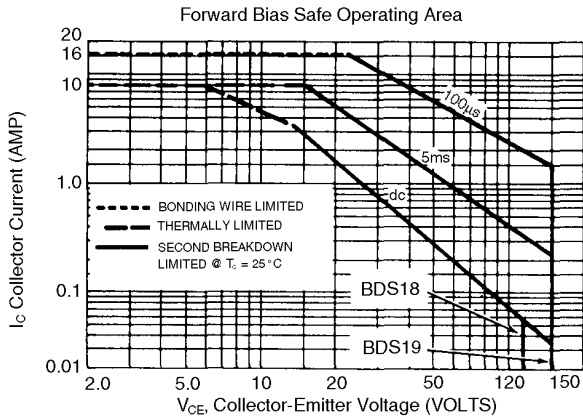



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.