

CQ92B  
CQ92D  
CQ92M  
CQ92N

TRIAC  
1.0 AMP, 200 THRU 800 VOLTS



TO-92 CASE

# Central<sup>TM</sup> Semiconductor Corp.

## DESCRIPTION:

The CENTRAL SEMICONDUCTOR CQ92B Series are epoxy molded silicon Triacs designed for full wave AC control applications featuring gate triggering in all four (4) quadrants.

MARKING CODE: FULL PART NUMBER

MAXIMUM RATINGS: ( $T_C=25^\circ\text{C}$  unless otherwise noted)


	SYMBOL	CQ92B	CQ92D	CQ92M	CQ92N	UNITS
Peak Repetitive Off-State Voltage	$V_{DRM}$	200	400	600	800	V
RMS On-State Current ( $T_C=50^\circ\text{C}$ )	$I_T(\text{RMS})$		1.0			A
Peak One Cycle Surge ( $t=10\text{ms}$ )	$I_{TSM}$		20			A
$I^2t$ Value for Fusing ( $t=10\text{ms}$ )	$I^2t$		2.0			$\text{A}^2\text{s}$
Peak Gate Power ( $t_p=10\mu\text{s}$ )	$P_{GM}$		3.0			W
Average Gate Power Dissipation	$P_G(\text{AV})$		0.2			W
Peak Gate Current ( $t_p=10\mu\text{s}$ )	$I_{GM}$		1.2			A
Peak Gate Voltage ( $t_p=10\mu\text{s}$ )	$V_{GM}$		8.0			V
Storage Temperature	$T_{stg}$		-40 to +150			$^\circ\text{C}$
Junction Temperature	$T_J$		-40 to +125			$^\circ\text{C}$
Thermal Resistance	$\theta_{JA}$		180			$^\circ\text{C/W}$
Thermal Resistance	$\theta_{JC}$		90			$^\circ\text{C/W}$

ELECTRICAL CHARACTERISTICS: ( $T_C=25^\circ\text{C}$  unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	MAX	UNITS
$I_{DRM}$	Rated $V_{DRM}$ , $R_{GK}=1\text{K}\Omega$		5.0	$\mu\text{A}$
$I_{DRM}$	Rated $V_{DRM}$ , $R_{GK}=1\text{K}\Omega$ , $T_C=125^\circ\text{C}$		200	$\mu\text{A}$
$I_{GT}$	$V_D=12\text{V}$ , QUAD I, II, III, IV		5.0	mA
$I_H$	$I_T=100\text{mA}$ , $R_{GK}=1\text{K}\Omega$		5.0	mA
$V_{GT}$	$V_D=12\text{V}$ , QUAD I, II, III, IV		2.0	V
$V_{TM}$	$I_{TM}=1.2\text{A}$ , $t_p=380\mu\text{s}$		1.26	V
dv/dt	$V_D=2/3 V_{DRM}$ , $T_C=125^\circ\text{C}$	30		V/ $\mu\text{s}$

R1 (03-June 2004)

TO-92 CASE - MECHANICAL OUTLINE

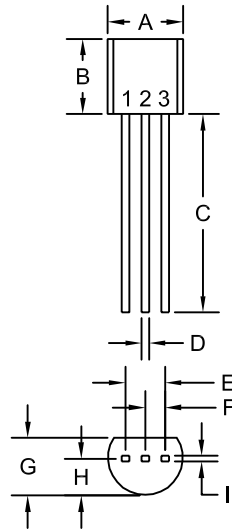

**LEAD CODE:**

- 1) MT1
- 2) GATE
- 3) MT2

**MARKING CODE:**

**FULL PART NUMBER**

SYMBOL	DIMENSIONS			
	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A (DIA)	0.175	0.205	4.45	5.21
B	0.170	0.210	4.32	5.33
C	0.500	-	12.70	-
D	0.016	0.022	0.41	0.56
E	0.100		2.54	
F	0.050		1.27	
G	0.125	0.165	3.18	4.19
H	0.080	0.105	2.03	2.67
I	0.015		0.38	

TO-92 (REV: R1)



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.