

AN5622


PAL System Color TV Chrominance Signal Processing Circuit

■ Outline


The AN5622 is an integrated circuit designed for PAL system color TV chrominance signal processing circuit.

■ Features

- Incorporating a total chrominance signal processing circuitry for PAL system color TV receivers on a single chip
- Fewer external components and easier circuit design
- PAL/SECAM compatible receivers can be realized when this circuit is used in combination with the AN5612 (AN5613) and AN5630N

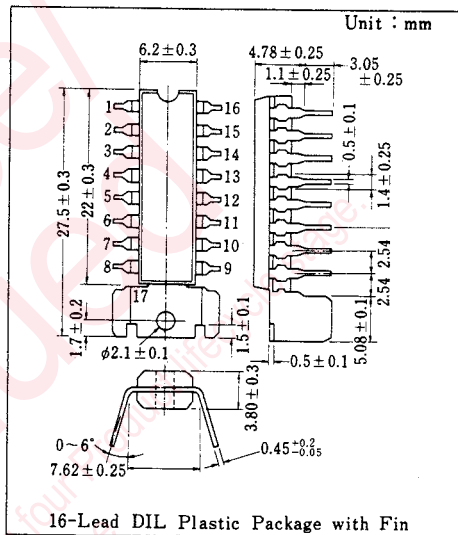

■ Block Diagram

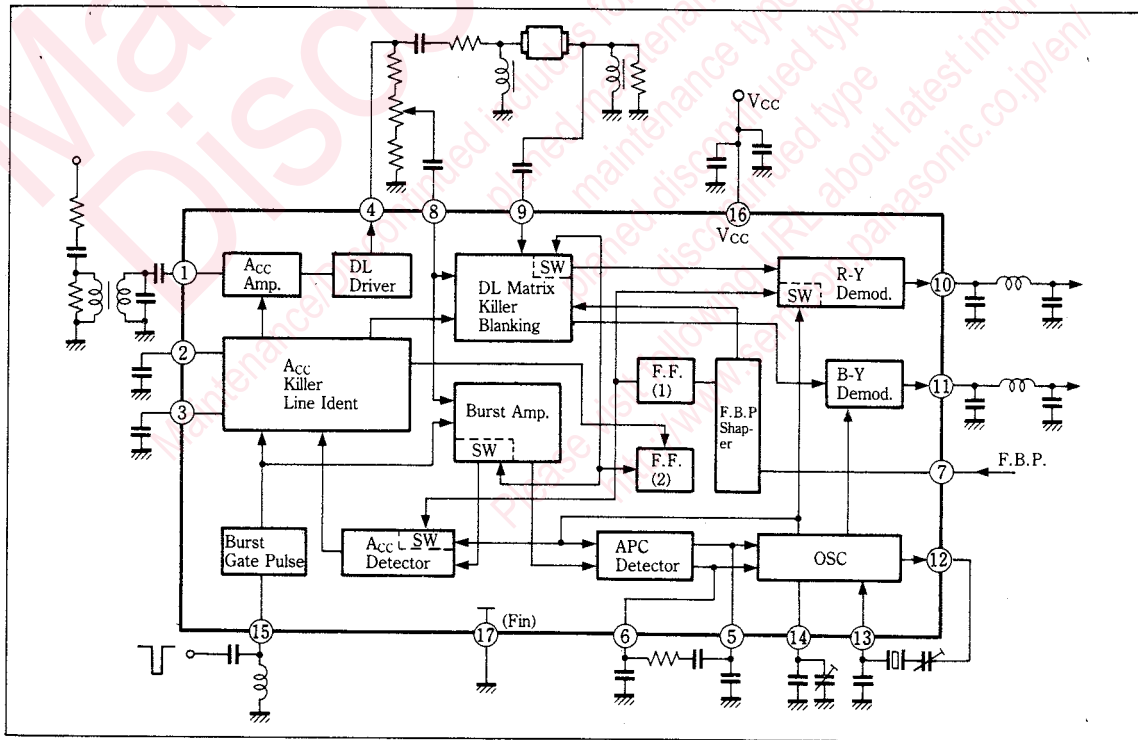

■ Absolute Maximum Ratings (Ta=25°C)


Item		Symbol	Rating		Unit
Voltage	Supply Voltage	V _{cc}	14.4		V
	Circuit Voltage	V ₁₋₁₇	0	V ₁₆₋₁₇	V
		V ₁₅₋₁₇	0	+ 4	V
Current	Circuit Current	I ₄	-20		mA
		I ₁₀	- 1	+ 5	mA
		I ₁₁	- 1	+ 5	mA
Power Dissipation (Ta=70°C)		P _D	1100		mW
Temperature	Operating Ambient Temperature	T _{opr}	-20~+70		°C
	Storage Temperature	T _{stg}	-55~+150		°C

Note : ⊕ and ⊖ are flow-in and flow-out currents to/from the circuit, respectively.


■ Electrical Characteristics (Ta=25°C)

Item	Symbol	Test Circuit	Condition	min.	typ.	max.	Unit
Total Circuit Current	I _{tot}	1	V _{cc} =12V	37	50	63	mA
Circuit Current	V ₁₀₋₁₇	1	V _{cc} =12V	9.7	10.5	11.3	V
	V ₁₁₋₁₇	1	V _{cc} =12V	0.45	0.60	0.75	V
Output Voltage(Burst)	e _b	2	TYP input (burst 100 mV _{p-p}) Pin ④ burst output Level	0.45	0.60	0.75	V _{p-p}
ACC Characteristics	ACC	2	-20dB input (burst 10mV _{p-p})	- 6	- 4	- 1	dB
Output Voltage (B-Y)	e _{o(1)}	2	Standard color bar, burst 100mV _{p-p}	0.8	1.2	1.6	V _{p-p}
Output Voltage (R-Y)	e _{o(2)}	2		0.7	1.1	1.5	V _{p-p}
Killer Color Leak(R-Y)	e _{1,K}	2	Standard color bar, signal level Killer ON	—	—	10	mV _{p-p}
Color Killer Level	e _K	2	Chroma input level When Killer ON (Attenuation from TYP input Level)	-40	-35	-30	dB
System Switch OFF Characteristics	e _{LOFF}	2	PNP EF of demodulator output at standard operation Signal element for Cut off	—	—	10	mV _{p-p}
Oscillation Frequency	f _o	4	V _{s-6} =0V displacement from 4.433618MHz	-250	—	250	Hz
fosc Change with Supply Voltage	Δf _o -V _{cc}	4	V _{cc} =12V ±20%, V _{s-6} = 0 V	-80	—	80	Hz
fosc Change with Ambient Temperature	Δf _o -Ta	4	V _{s-6} = 0 V, Ta=-20~+70°C	100	—	100	Hz
Oscillation Starting Supply Voltage	V _{osc}	4	UP from V _{cc} : Low side, V _{cc} for the start of oscillation	—	—	8.0	V
VCO Control Sensitivity	β	4	Oscillation frequency for V _{s-6} =±50mV	0.4	0.9	1.4	Hz/mV
Phase Detection Sensitivity (APC)	μ	4	Burst relative phase ±15° for SC	50	75	100	mV/deg.
APC Pull-in Range	f _p	4	Burst frequency change of Pin ⑧ alternating burst	±0.4	±0.6	—	kHz
Phase Hold Characteristics	Δφ	4	Output phase change for variation of burst frequency	0.00	0.03	0.13	deg./Hz


Test Circuit 1 (I_{tot} , V_{10-17} , V_{11-17})

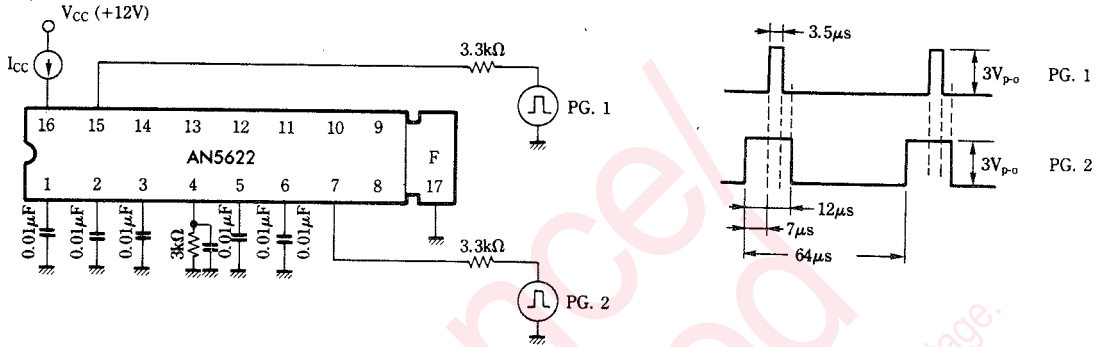

Test Circuit 2 (e_b , ACC, e_o , e_{LK} , $e_{L OFF}$, B-Y/R-Y)

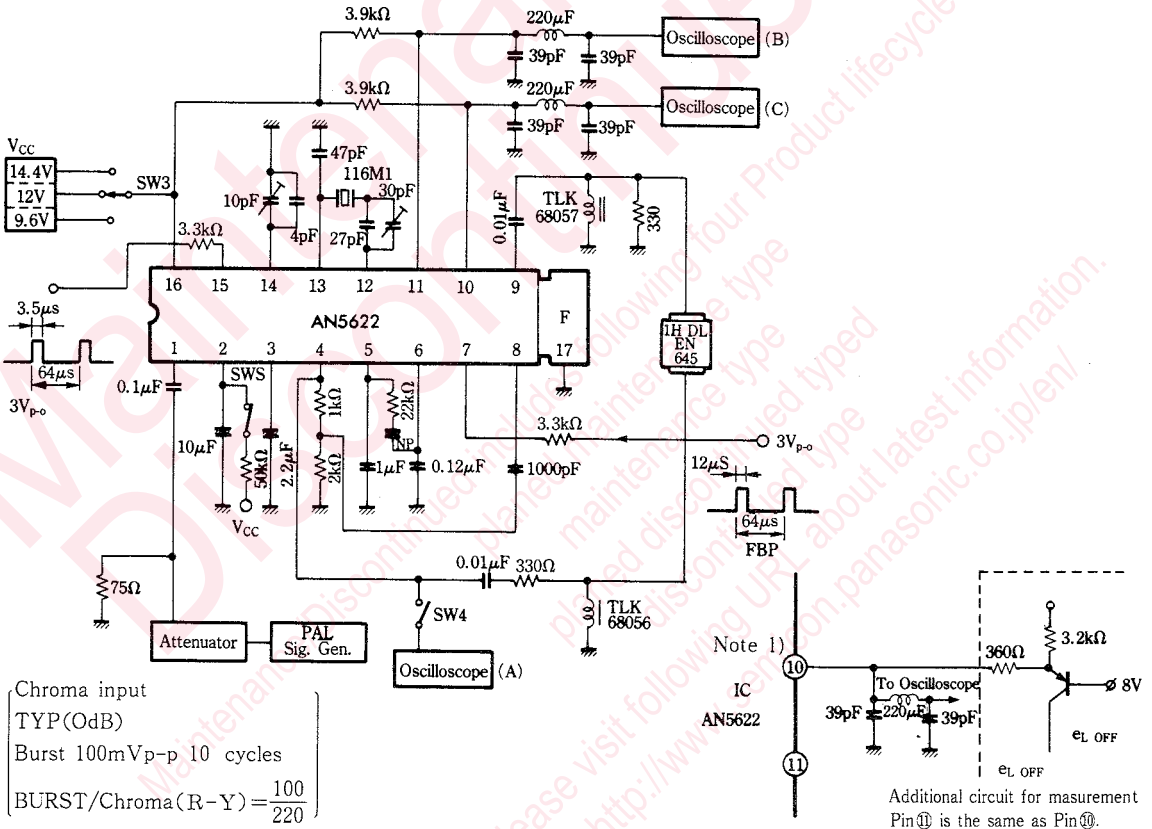


Chroma input
TYP(OdB)
Burst 100mV_{p-p} 10 cycles
 $BURST/Chroma(R-Y) = \frac{100}{220}$

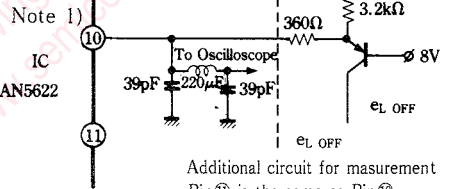

Item	e_b	ACC	$e_o, B-Y / R-Y$	e_{LK}	e_K	$e_{L OFF}$
SW3	②	②	②	②	②	②
SW4	ON	ON	OFF	OFF	OFF	OFF
SW5	OFF	OFF	OFF	ON	OFF	OFF
Chroma Input	OdB	-20dB	OdB	OdB	Chroma input attenuation	OdB
Oscilloscope	A	A	B/C	B/C	B	Note 1)

↑
Input level at Killer ON


Test Circuit 3 (f_o , Δf_o-V_{CC} , Δf_o-T_a , V_{OSC} , β , μ , f_p , $\Delta \phi$)

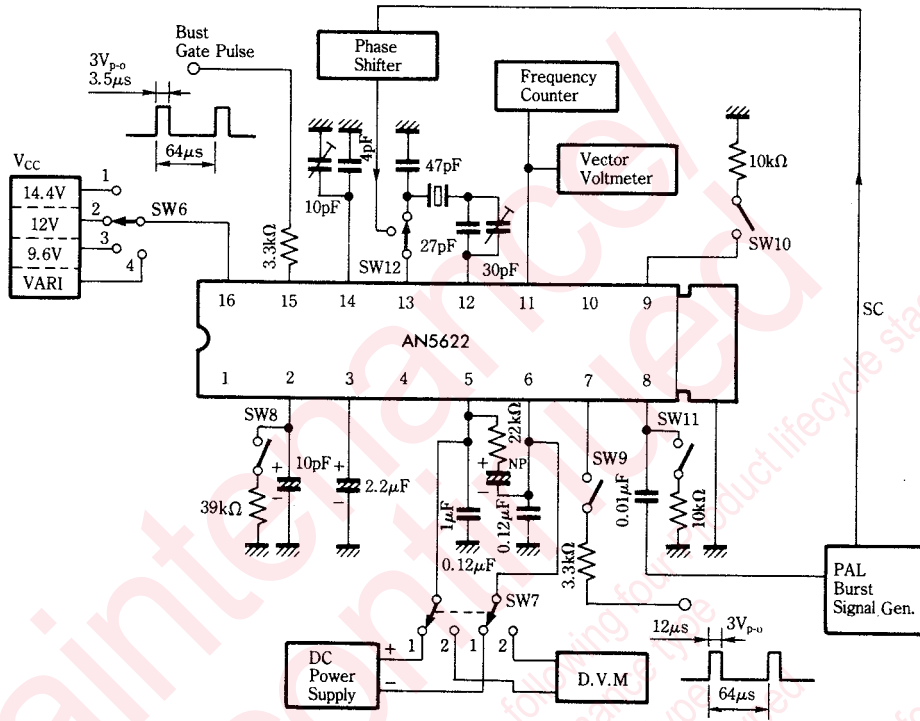

Note : Locked to burst frequency for PAL burst signal

Item	f_o	Δf_o-V_{CC}	Δf_o-T_a	V_{osc}	β	μ	f_p	$\Delta \phi$
SW6	②	①/③	②	④	②	②	②	②
SW7	①	①	①	①	①	②	②	②
SW8	ON	ON	ON	ON	ON	OFF	OFF	ON
SW9	OFF	OFF	OFF	OFF	OFF	ON	ON	ON
SW10/11	ON	ON	ON	ON	ON	OFF	ON	ON
SW12	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON
Measuring Equipment	Frequency Counter	Frequency Counter	Frequency Counter	Frequency Counter	Frequency Counter	D. V. M	Osc. Pin ⑩	Vector Voltmeter

Application Circuit (Combined Use of the AN5612/the AN5613 and the AN5630N)

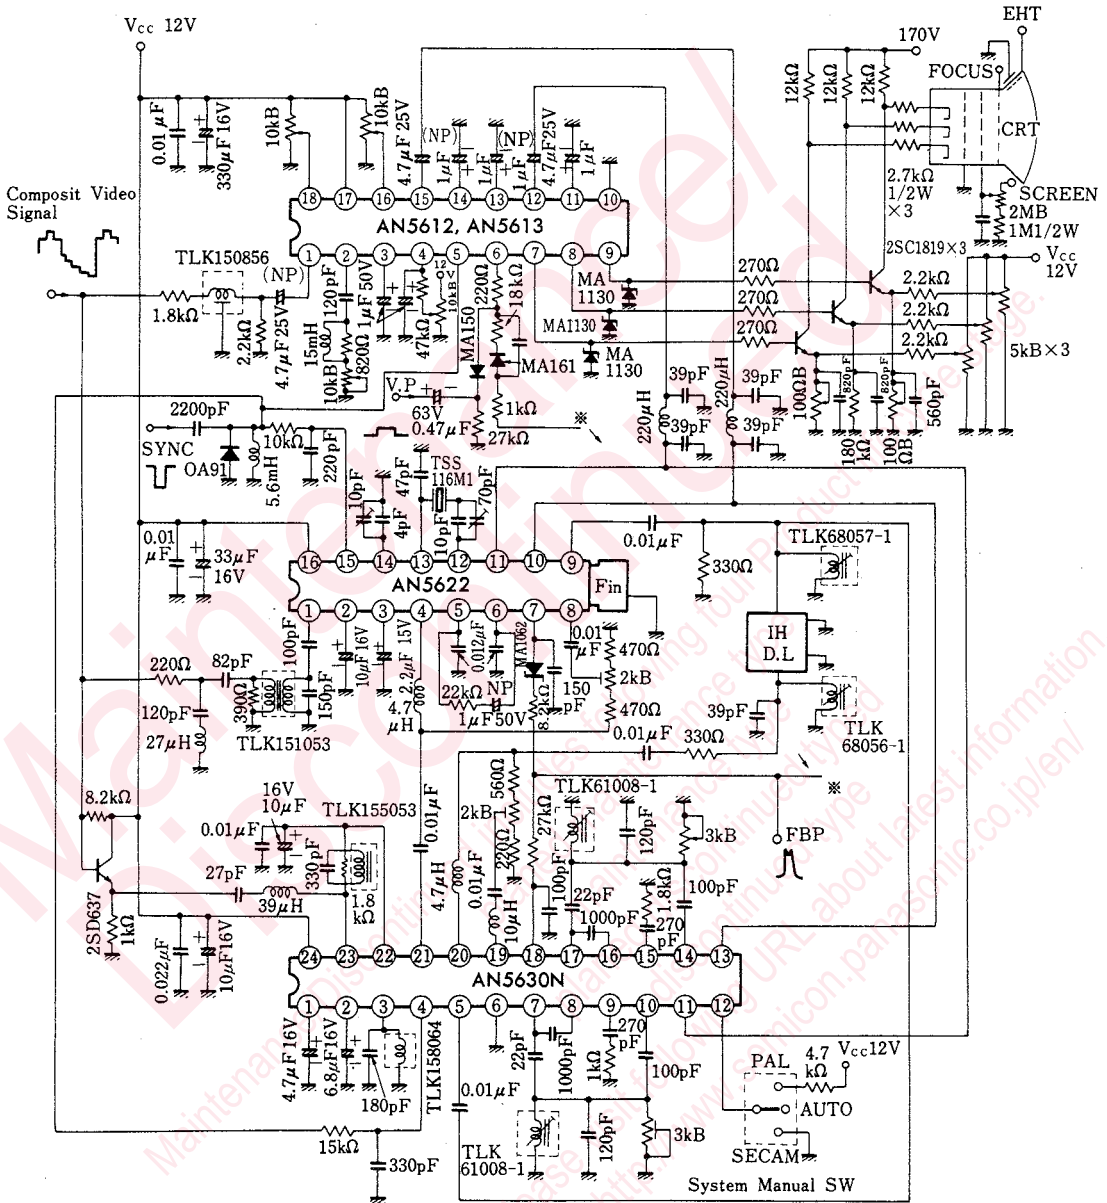

■ Pin

Pin No.	Pin Name
1	Chroma Input
2	ACC Filter (Variable)
3	ACC Filter (Standard)
4	ACC Chroma Output
5	APC Filter (1)
6	APC Filter (2)
7	FBP Input
8	DL Matrix Chroma Input
9	DL Matrix Chroma Input (1H Delayed)
10	R-Y Output
11	B-Y Output
12	OSC. Output
13	OSC. Input (1)
14	Osc. Outside Constant
15	Burst Gate Pulse Input
16	V _{cc}
17(Fin)	GND

Request for your special attention and precautions in using the technical information and semiconductors described in this book

- (1) If any of the products or technical information described in this book is to be exported or provided to non-residents, the laws and regulations of the exporting country, especially, those with regard to security export control, must be observed.
- (2) The technical information described in this book is intended only to show the main characteristics and application circuit examples of the products. No license is granted in and to any intellectual property right or other right owned by Panasonic Corporation or any other company. Therefore, no responsibility is assumed by our company as to the infringement upon any such right owned by any other company which may arise as a result of the use of technical information described in this book.
- (3) The products described in this book are intended to be used for standard applications or general electronic equipment (such as office equipment, communications equipment, measuring instruments and household appliances).
Consult our sales staff in advance for information on the following applications:
 - Special applications (such as for airplanes, aerospace, automobiles, traffic control equipment, combustion equipment, life support systems and safety devices) in which exceptional quality and reliability are required, or if the failure or malfunction of the products may directly jeopardize life or harm the human body.
 - Any applications other than the standard applications intended.
- (4) The products and product specifications described in this book are subject to change without notice for modification and/or improvement. At the final stage of your design, purchasing, or use of the products, therefore, ask for the most up-to-date Product Standards in advance to make sure that the latest specifications satisfy your requirements.
- (5) When designing your equipment, comply with the range of absolute maximum rating and the guaranteed operating conditions (operating power supply voltage and operating environment etc.). Especially, please be careful not to exceed the range of absolute maximum rating on the transient state, such as power-on, power-off and mode-switching. Otherwise, we will not be liable for any defect which may arise later in your equipment.
 - Even when the products are used within the guaranteed values, take into the consideration of incidence of break down and failure mode, possible to occur to semiconductor products. Measures on the systems such as redundant design, arresting the spread of fire or preventing glitch are recommended in order to prevent physical injury, fire, social damages, for example, by using the products.
- (6) Comply with the instructions for use in order to prevent breakdown and characteristics change due to external factors (ESD, EOS, thermal stress and mechanical stress) at the time of handling, mounting or at customer's process. When using products for which damp-proof packing is required, satisfy the conditions, such as shelf life and the elapsed time since first opening the packages.
- (7) This book may be not reprinted or reproduced whether wholly or partially, without the prior written permission of our company.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.