

## PNP SWITCHING SILICON TRANSISTOR

Qualified per MIL-PRF-19500/396

### Devices

<b>2N3762</b>	<b>2N3763</b>	<b>2N3764</b>	<b>2N3765</b>
<b>2N3762L</b>	<b>2N3763L</b>		

### Qualified Level

**JAN**  
**JANTX**  
**JANTXV**

### MAXIMUM RATINGS

Ratings	Symbol	2N3762* 2N3764	2N3763* 2N3765	Unit
Collector-Emitter Voltage	$V_{CEO}$	40	60	Vdc
Collector-Base Voltage	$V_{CBO}$	40	60	Vdc
Emitter-Base Voltage	$V_{EBO}$	5.0		Vdc
Collector Current	$I_C$	1.5		Adc
		2N3762* <sup>1</sup> 2N3763*	2N3764 <sup>2</sup> 2N3765	
Total Power Dissipation @ $T_A = +25^{\circ}C$	$P_T$	1.0	0.5	W
Operating & Storage Junction Temp. Range	$T_{op}, T_{stg}$	-55 to +200		$^{\circ}C$


### THERMAL CHARACTERISTICS

Characteristics	Symbol	Max.		Unit
		2N3762* 2N3763*	2N3764 2N3765	
Thermal Resistance Junction-to-Case	$R_{\theta JC}$	60	88	$^{\circ}C/W$

\*Electrical characteristics for "L" suffix devices are identical to the "non L" corresponding devices

1) Derate linearly at 5.71 mW/ $^{\circ}C$  for  $T_A > +25^{\circ}C$

2) Derate linearly at 2.86 mW/ $^{\circ}C$  for  $T_A > +25^{\circ}C$

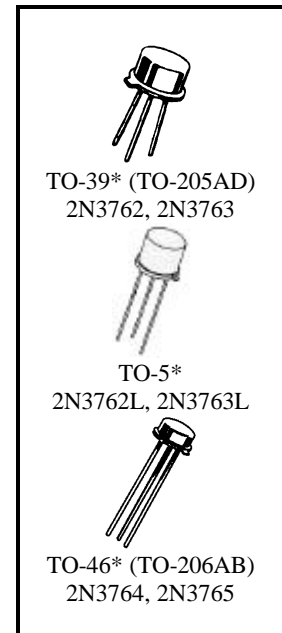

\*See appendix A for package outline

### ELECTRICAL CHARACTERISTICS ( $T_A = 25^{\circ}C$ unless otherwise noted)

Characteristics	Symbol	Min.	Max.	Unit
-----------------	--------	------	------	------

### OFF CHARACTERISTICS

Collector-Emitter Breakdown Current $I_C = 10$ mAdc	2N3762, 2N3764 2N3763, 2N3765	$V_{(BR)CEO}$	40 60	Vdc
Collector-Base Cutoff Current $V_{CB} = 20$ Vdc $V_{CB} = 30$ Vdc $V_{CB} = 40$ Vdc $V_{CB} = 60$ Vdc	2N3762, 2N3764 2N3763, 2N3765 2N3762, 2N3764 2N3763, 2N3765	$I_{CBO}$		100 100 10 10 $\eta$ Adc $\mu$ Adc

**2N3762, L, 2N3763, L, 2N3764, 2N3765 JAN SERIES**

**ELECTRICAL CHARACTERISTICS (con't)**

Characteristics	Symbol	Min.	Max.	Unit
Collector-Emitter Cutoff Current $V_{EB} = 2.0 \text{ Vdc}, V_{CE} = 20 \text{ Vdc}$ $V_{EB} = 2.0 \text{ Vdc}, V_{CE} = 30 \text{ Vdc}$	$I_{CEX}$		100	$\eta\text{Adc}$
2N3762, 2N3764 2N3763, 2N3765			100	
Emitter-Base Cutoff Current $V_{EB} = 2.0 \text{ Vdc}$ $V_{EB} = 5.0 \text{ Vdc}$	$I_{EBO}$		200	$\eta\text{Adc}$
All Types			10	
2N3762, 2N3764 2N3763, 2N3765			10	

**ON CHARACTERISTICS (3)**

Forward-Current Transfer Ratio $I_C = 10 \text{ mAdc}, V_{CE} = 1.0 \text{ Vdc}$ $I_C = 150 \text{ mAdc}, V_{CE} = 1.0 \text{ Vdc}$ $I_C = 500 \text{ mAdc}, V_{CE} = 1.0 \text{ Vdc}$ $I_C = 1.0 \text{ Adc}, V_{CE} = 1.5 \text{ Vdc}$	$h_{FE}$		35	
2N3762, 2N3764			40	140
2N3763, 2N3765			40	120
2N3762, 2N3764			20	80
2N3763, 2N3765			30	20
Collector-Emitter Saturation Voltage $I_C = 10 \text{ mAdc}, I_B = 1.0 \text{ mAdc}$ $I_C = 150 \text{ mAdc}, I_B = 15 \text{ mAdc}$ $I_C = 500 \text{ mAdc}, I_B = 50 \text{ mAdc}$ $I_C = 1.0 \text{ Adc}, I_B = 100 \text{ mAdc}$	$V_{CE(sat)}$			0.1
				0.22
				0.5
				0.9
Base-Emitter Saturation Voltage $I_C = 10 \text{ mAdc}, I_B = 1.0 \text{ mAdc}$ $I_C = 150 \text{ mAdc}, I_B = 15 \text{ mAdc}$ $I_C = 500 \text{ mAdc}, I_B = 50 \text{ mAdc}$ $I_C = 1.0 \text{ Adc}, I_B = 100 \text{ mAdc}$	$V_{BE(sat)}$			0.8
				1.0
				1.2
			0.9	1.4

**DYNAMIC CHARACTERISTICS**

Forward Current Transfer Ratio, Magnitude $I_C = 50 \text{ mAdc}, V_{CE} = 10 \text{ Vdc}, f = 100 \text{ MHz}$	$ h_{fe} $		1.8	6.0
2N3762, 2N3764 2N3763, 2N3765			1.5	6.0
Output Capacitance $V_{CB} = 10 \text{ Vdc}, I_E = 0, 100 \text{ kHz} \leq f \leq 1.0 \text{ MHz}$	$C_{obo}$			25
Input Capacitance $V_{EB} = 0.5 \text{ Vdc}, I_C = 0, 100 \text{ kHz} \leq f \leq 1.0 \text{ MHz}$	$C_{ibo}$			80

**SWITCHING CHARACTERISTICS**

Delay Time	$V_{CC} = 30 \text{ Vdc}, V_{EB} = 0,$ $I_C = 1.0 \text{ mAdc}, I_{B1} = 100 \text{ mAdc}$	$t_d$		8.0	$\eta\text{s}$
Rise Time		$t_r$		35	$\eta\text{s}$
Storage Time	$V_{CC} = 30 \text{ Vdc}, V_{EB} = 0,$ $I_C = 1.0 \text{ mAdc}, I_{B1} = 100 \text{ mAdc}$	$t_s$		80	$\eta\text{s}$
Fall Time		$t_f$		35	$\eta\text{s}$

(3) Pulse Test: Pulse Width = 300 $\mu\text{s}$ , Duty Cycle  $\leq$  2.0%.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.