



SERIES B-2T

25A-42.5A SCR/DIODE CIRCUITS

Part Number Identification

1st Digit Series Type	2nd Digit Current	3rd Digit Circuit Type	4th Digit AC Line Voltage	Options	Type Of Terminal
B-Casestyle (Ceramic Base)	5-25 amps. 6-42.5 amps.*	1-9 (see schematic diagrams)	1-120 volts 2-240 volts 3-280 volts 4-440 volts	F-Free Wheeling Diode Option S-Suppressor Option E-External Mounting of Suppressor	2T- 250


* 42.5 AMP Rating only available in circuits 1, 2, 3, & 5

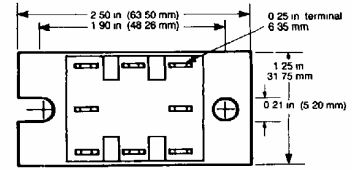

Electrical Specifications

		PACKAGE TYPE	
		B5	B6
I_d	maximum dc output current @ 85° C = Tc full bridge (circuits 1-4) (A)	25	42.5
$I_T(RMS)$	maximum output current @ 85°C ceramic plate CKT5(A)	27	46
V_{TM}	maximum peak on-state voltage	1.8V @ 25A	1.6V @ 40A
I_H	maximum holding current	200mA	200mA
T_J	operating junction temperature range	- 25°C to 125°C	
di/dt	critical rate of rise of on-state current @ $T_J = 125°C$ (A/μS)	100	100
dv/dt	① critical rate of rise of off-state voltage @ $T_J = 125°C$ (V/μS)	200	200
V_{RMS}	AC line input voltage (PIV)	--- 120 (400PIV) --- --- 240 (600PIV) --- --- 280 (800PIV) --- --- 440 (1200PIV) ---	
I_{TSM}	maximum non-repetitive surge current (A) 60Hz—125°C 50Hz—25°C	300 325	600 650
I^2t	maximum I^2t for fusing t = 8.3 MSEC (A² sec)	370	1500
I_{GT}	maximum required gate current to trigger, 25°C (mA)	110	150
I_{GT}	typical gate current to trigger	---20mA to 100mA---	
I_{GM}	maximum peak gate current	3.0A	3.0A
V_{GT}	maximum required gate voltage to trigger, 25°C (V)	2.5	3.0
V_{GT}	typical gate voltage to trigger	0.9V	0.9V
V_{GD}	maximum non-triggering gate voltage at $T_J = 125°C$	0.2V	0.2V
P_{GM}	maximum peak gate power, tp = 10μSec.	5W	5W
$P_G(AV)$	average gate power	0.5W	0.5W
V_{GM}	maximum peak gate voltage (forward)	10V	10V
V_{GM}	maximum peak gate voltage (reverse)	5.0V	5.0V
$R_{θcs}$	① maximum thermal resistance case to sink (°C/W)	0.10	0.10
V_{FM}	maximum peak forward voltage	1.65V @ 25A	1.50V @ 40A
$Rθ_{JC}$	typical thermal resistance junction to ceramic base per device	0.6 C/W	0.5°C/W
V_{ISOL}	isolation voltage from terminals to base	---2500 volts _{RMS} min.---	

Circuit Configurations for Series B-2T

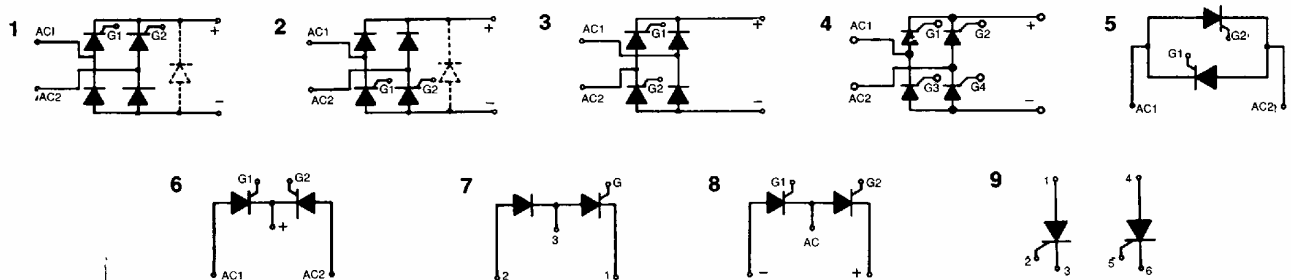

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.