

M5236L, ML

GENERAL PURPOSE 3-TERMINAL VARIABLE VOLTAGE OUTPUT REGULATOR (FOR DRIVER)

6249826 MITSUBISHI ELEK (LINEAR)

80C 08918

D T-58-11-23

DESCRIPTION

The M5236 is a semiconductor integrated circuit designed for general-purpose output voltage regulator.

A high-performance variable output voltage regulator with small input-output voltage differences can be made in combination with externally connected PNP transistors.

It is housed in a small 3-pin package, including a reference voltage circuit, error amplifier, and driver, and the output voltage can be set freely by externally connected resistors, and a small, compact power supply circuit can be achieved, making the device suitable for use in small electronic equipment, such as car stereo, radio cassette recorder and portable stereo equipment.

FEATURES

- Wide operating voltage range
..... $V_{IN}=3.5V\sim36V$, $V_O=1.5V\sim33V$
- Capable of operating at low input-output voltage for driver by externally connected power transistors
[$V_{CE(sat)}$ state of TR] $V_{I-O(min)}\approx 0.2V$
- Output voltage can be set freely by externally connected resistors
- Built-in ASO protection and thermal cutoff circuits
- Capable of taping (automated insertion) and lead forming


APPLICATION

For car stereo equipment, radio cassette recorder, portable stereo and other general electronic equipment.


RECOMMENDED OPERATING CONDITIONS

Supply voltage range $V_{IN}=3.5V\sim30V$
Rated supply voltage $V_O=1.5V\sim25V$

PIN CONFIGURATION




TO-92L



SOT-89

PIN CONNECTION

- ① INPUT
- ② GND
- ③ VOLTAGE ADJUSTMENT




TO-92L package



SOT-89 package

BLOCK DIAGRAM

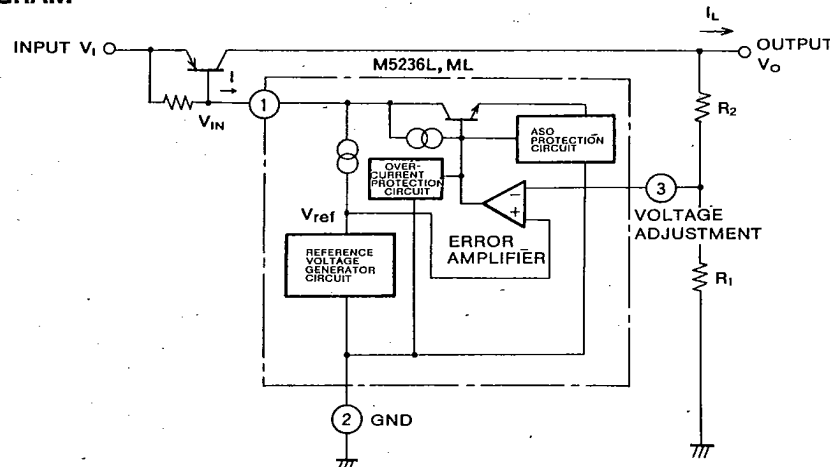

GENERAL PURPOSE 3-TERMINAL VARIABLE VOLTAGE OUTPUT REGULATOR (FOR DRIVER)

6249826 MITSUBISHI ELEK (LINEAR)

80C 08919

D T-58-11-23

ABSOLUTE MAXIMUM RATINGS (T_a=25°C)

Symbol	Parameter	Ratings	Unit
V _{IN}	Input voltage	36	V
I _D	Drive current	30	mA
V _I -V _O	Input-output voltage difference	30	V
P _d	Power dissipation	900(SIP)/500(ML)	mW
T _{opr}	Operating temperature	-20~+75	°C
T _{stg}	Storage temperature	-55~+150	°C

ELECTRICAL CHARACTERISTICS (measurement circuit (a) is used with, T_a=25°C, V_I=15V, V_O=12V, I_L=200mA, C_{REF}=1μF, R₁=4.3kΩ, unless otherwise noted)

Symbol	Parameter	Test conditions	Limits			Unit
			Min	Typ	Max	
V _{IN}	Input voltage	(between pin ① and pin ②)	3.5		36	V
V _O	Output voltage	R ₂ ≠0.82kΩ~108kΩ	1.5		33	V
V _I -V _O	Minimum input-output voltage difference			0.2		V
V _{REF}	Reference voltage	(between pin ③ and pin ②)	1.20	1.26	1.32	V
Reg-in	Input regulation	V _I =15~20V		0.02	0.1	%/V
Reg-L	Load regulation	I _L =10~200mA		0.02	0.1	%
I _B	Bias current	I _L =0 (disregarding the current in resistors R ₁ , R ₂)		1.7	3.0	mA
TC _{VO}	Temperature coefficient of output voltage	T _a =0~75°C		0.02		%/°C
RR	Ripple rejection ratio	f=120Hz (measured with circuit (b))		68		dB
V _{NO}	Output noise voltage	f=20Hz~100kHz		33		μVrms


TEST CIRCUITS

(a) Standard test circuit


$$V_O = V_{REF} \left(1 + \frac{R_2}{R_1}\right) \approx 1.26 \times \left(1 + \frac{R_2}{4.3}\right) \text{ (V)}$$

$$R_2 = R_1 \left(\frac{V_O}{V_{REF}} - 1\right) \approx 4.3 \times \left(\frac{V_O}{1.26} - 1\right) \text{ (k}\Omega\text{)}$$

$$(R_1 = 4.3\text{k}\Omega, V_{REF} \approx 1.26\text{V})$$

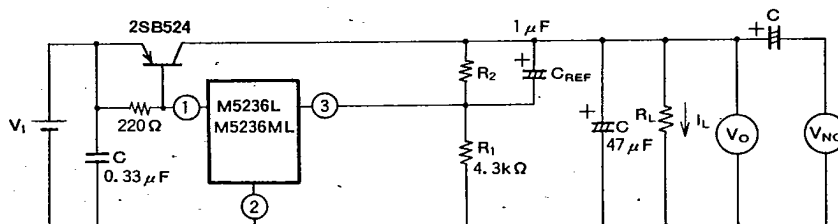

(b) Ripple rejection test circuit






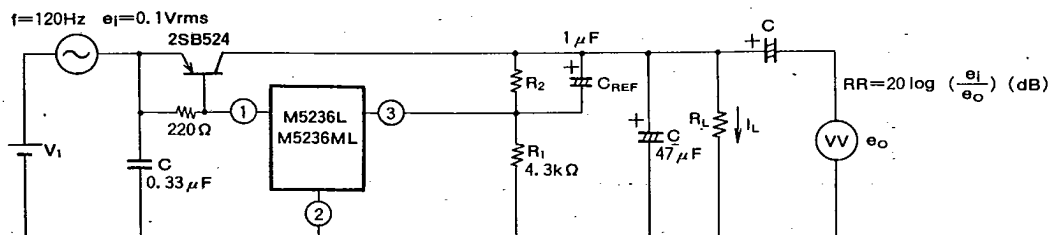


**GENERAL PURPOSE 3-TERMINAL VARIABLE VOLTAGE OUTPUT REGULATOR
(FOR DRIVER)**

6249826 MITSUBISHI ELEK (LINEAR)

80C 08920

D T-58-11-23

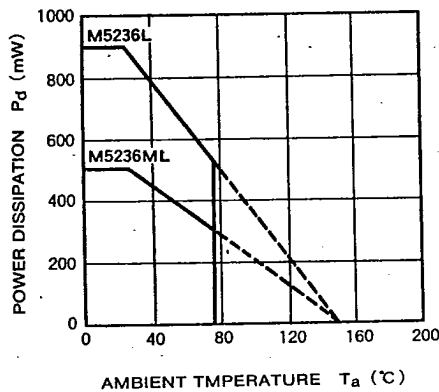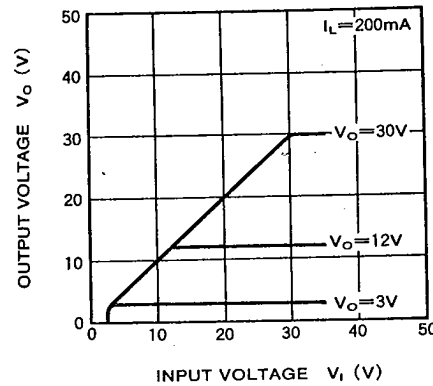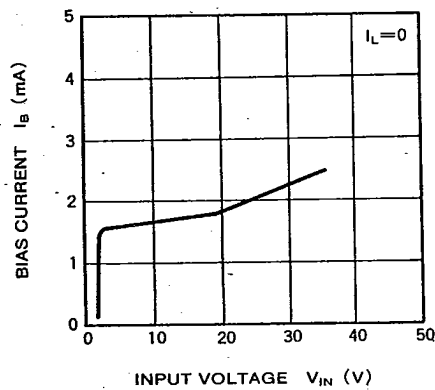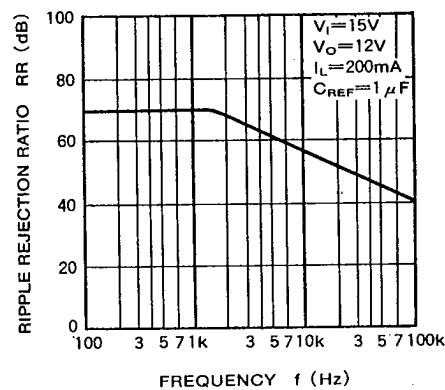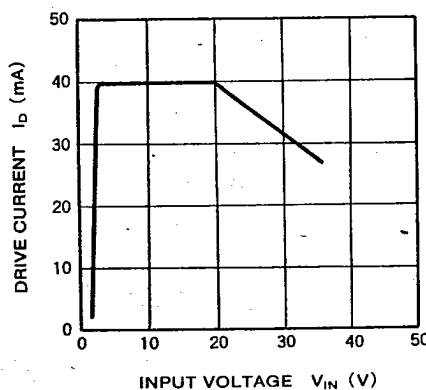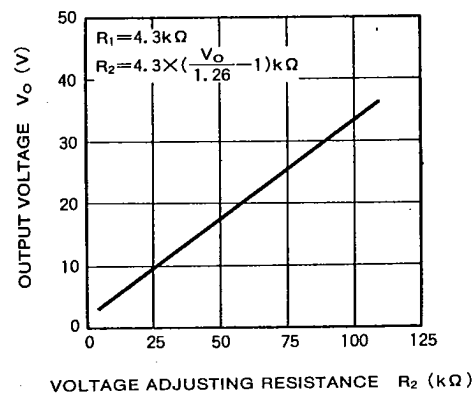TYPICAL CHARACTERISTICS
THERMAL DERATING (MAXIMUM RATINGS)

OUTPUT VOLTAGE CHARACTERISTICS

BIAS CURRENT VS. INPUT VOLTAGE

RIPPLE REJECTION

DRIVE CURRENT VS. INPUT VOLTAGE

OUTPUT VOLTAGE VS. VOLTAGE ADJUSTING RESISTANCE


**GENERAL PURPOSE 3-TERMINAL VARIABLE VOLTAGE OUTPUT REGULATOR
(FOR DRIVER)**


6249826 MITSUBISHI ELEK (LINEAR)

80C 08921

D T-58-11-23

APPLICATION EXAMPLES

1. Standard application circuit

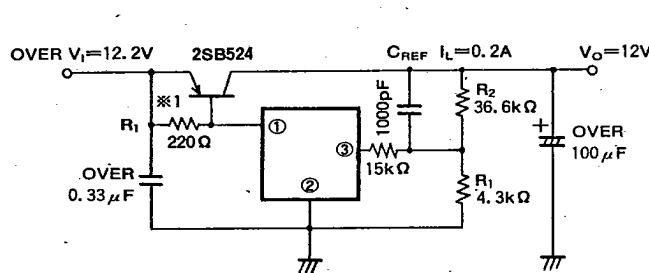


$$V_O = V_{REF} \times \left(1 + \frac{R_2}{R_1}\right)$$

$$V_{REF} = 1.26V(\text{typ.})$$

※1. R_1 of 180~220Ω should be used.

Note) Capacitors displaying small capacity change with temperature should be used.

2. Control circuit for maximum drive current (I_{DM})

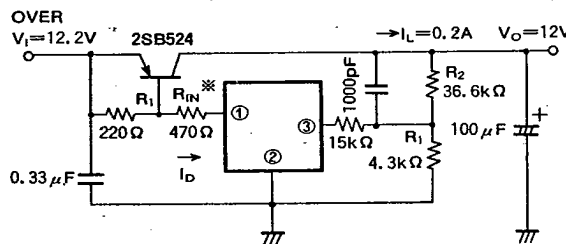

When the input voltage (V_I) is lower than the set output voltage (V_O), drive current of approximately 30mA to 45mA runs in Pin ① of the integrated circuit. (Refer to TYPICAL CHARACTERISTICS DRIVE CURRENT VS INPUT VOLTAGE. For example, when the input voltage V_I of 20V is higher than the fixed output voltage of 20V or above, and input and output are inverted, power dissipation in the circuit is $P_d = 20V \times 45mA = 900mW$, and reaches the maximum rating, making it necessary to control the drive current.) When the input power supply is supplied by batteries and the current needs to be controlled, a resistor R_{IN} can be inserted to control the drive current. (Fig. 1 shows input voltage dependency of the control current and input resistor R_{IN} .)

When the input voltage reaches 12V ($=V_O$), the current at Pin ① is limited to approximately 20mA.

Fig. 2 shows I_D - V_I characteristics of the circuit.

Fig. 1 MAXIMUM DRIVE CURRENT CONTROL CHARACTERISTICS (I_{DM})


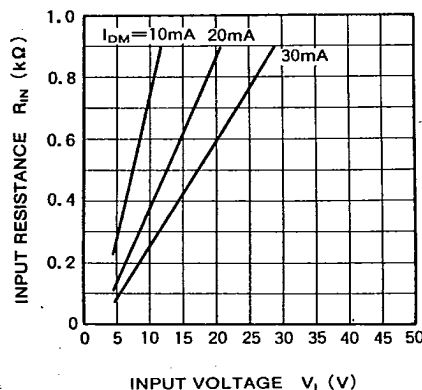


Fig. 2 I_D - V_I CHARACTERISTICS IN APPLICATION EXAMPLE 2

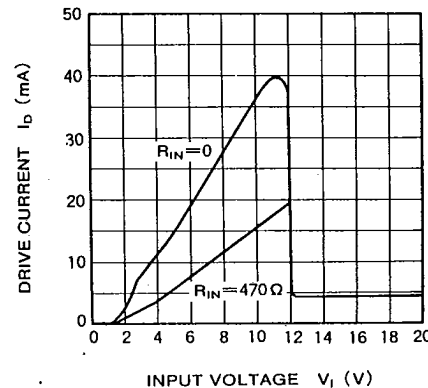


GENERAL PURPOSE 3-TERMINAL VARIABLE VOLTAGE OUTPUT REGULATOR
(FOR DRIVER)

6249826 MITSUBISHI ELEK (LINEAR)

80C 08922

D T-58-11-23

3. ON/OFF control of output voltage circuit

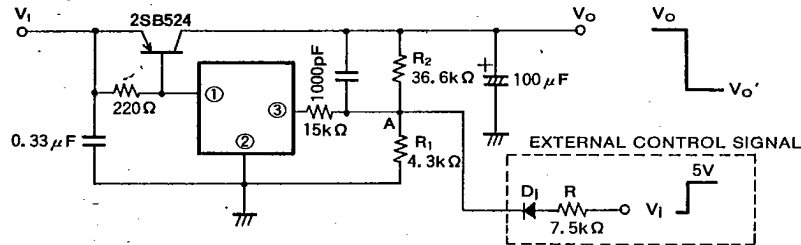

Resistor R in the control circuit is determined by the following equation.

$$R = \frac{V_I - V_F - V_{REF'}}{V_{REF'} + \frac{V_{REF'} - V_{O'}}{R_2}}$$

where, V_I : External control voltage

V_F : Forward voltage of diode (D_1)

$V_{REF'}$: 1.4V Pin ③ voltage when $V_{REF'}$ is $V_{O(OFF)}$

$V_{O'}$: 0V output voltage when $V_{O'}$ is $V_{O(OFF)}$