

NPN SILICON RF POWER TRANSISTOR

DESCRIPTION:

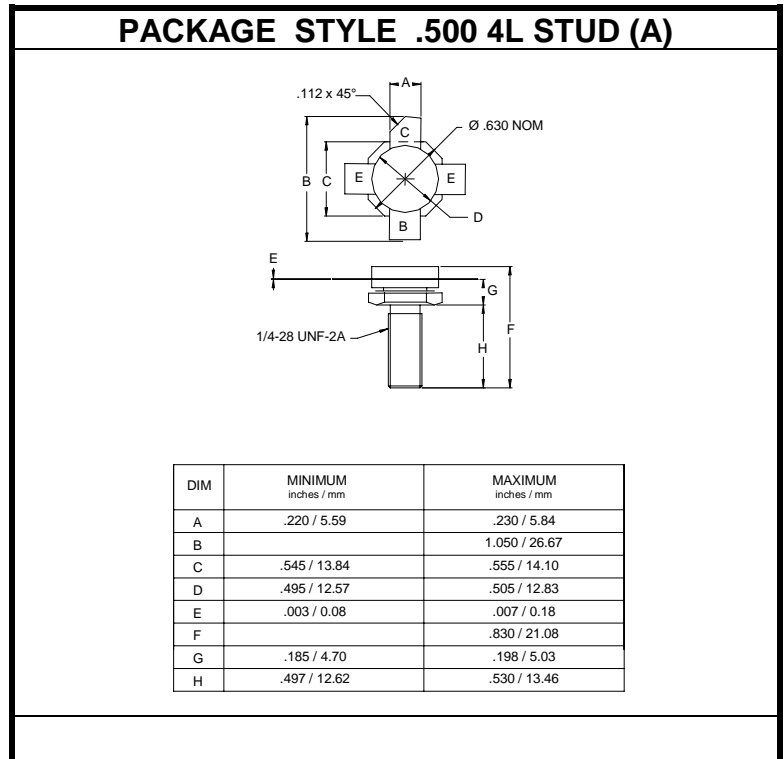
The **ASI BLX14** is Designed for HF and VHF band applications.

FEATURES:

- $P_G = 13$ dB min. at 15 W/1.6 MHz
- $d_3 = -40$ dB typ. at 15 W(PEP)
- **Omnigold™** Metalization System

MAXIMUM RATINGS

I_C	4.0 A
V_{CBO}	85 V
V_{EBO}	4.0 V
V_{CEO}	36 V
P_{DISS}	88 W @ $T_C = 25$ °C
T_J	-65 °C to +200 °C
T_{STG}	-65 °C to +200 °C
θ_{JC}	1.99 °C/W


CHARACTERISTICS $T_C = 25$ °C

SYMBOL	TEST CONDITIONS			MINIMUM	TYPICAL	MAXIMUM	UNITS
BV_{CBO}	$I_C = 25$ mA			85			V
BV_{CER}	$I_C = 25$ mA	$R_{BE} = 5.0$ Ω		85			V
BV_{CEO}	$I_C = 50$ mA			36			V
BV_{EBO}	$I_E = 10$ mA			4.0			V
h_{FE}	$V_{CE} = 6.0$ V	$I_C = 1.4$ A		15		100	---
f_T	$V_{CE} = 20$ V	$I_C = 3.0$ A			250		MHz
C_C	$V_{CB} = 30$ V		$f = 1.0$ MHz		115	125	pF
G_P d_3	$V_{CE} = 28$ V $f = 1.6$ MHz	$I_{CQ} = 2.0$ A	$P_{OUT} = 15$ W(PEP)	13	-40		dB dB

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.