

BD181, BD182, BD183

File Number **700**


High-Power Silicon N-P-N Transistors

Broadly Applicable Devices
For Commercial Use

Features:

- Maximum safe-area-of-operation curves
- Low saturation voltages
- High dissipation ratings

TERMINAL DESIGNATIONS



JEDEC TO-204AA

RCA-BD181, BD182 and BD183 are silicon n-p-n transistors intended for a wide variety of high-power applications. Typical applications include power-switching circuits, audio amplifiers, solenoid drivers, and series and shunt regulators.

These devices are supplied in the popular JEDEC TO-204AA package.

		BD181	BD182	BD183	
MAXIMUM RATINGS, Absolute-Maximum Values:					
COLLECTOR-TO-BASE VOLTAGE	V_{CBO}	55	70	85	V
COLLECTOR-TO-EMITTER SUSTAINING VOLTAGE:					
With external base-to-emitter resistance (R_{BE}) = 100 Ω	$V_{CER(sus)}$	55	70	85	V
With base open	$V_{CEO(sus)}$	45	60	80	V
EMITTER-TO-BASE VOLTAGE	V_{EBO}	7	7	7	V
CONTINUOUS COLLECTOR CURRENT	I_C	15	15	15	A
CONTINUOUS BASE CURRENT	I_B	7	7	7	A
TRANSISTOR DISSIPATION:	P_T				
At case temperatures up to 25°C		117	117	117	W
At case temperatures above 25°C		← See Fig. 2 →			
TEMPERATURE RANGE:					
Storage and Operating (Junction)		← -65 to +200 →			°C
PIN TEMPERATURE (During Soldering):					
At distances \geq 1/32 in. (0.8 mm) from seating plane for 10 s max.		← 235 →			°C

BD181, BD182, BD183

ELECTRICAL CHARACTERISTICS, At Case Temperature (T_C) = 25°C Unless Otherwise Specified

CHARACTERISTIC	SYMBOL	TEST CONDITIONS						LIMITS						UNITS	
		VOLTAGE V dc				CUR- RENT A dc		BD181		BD182		BD183			
		V _{CB}	V _{CE}	V _{EB}	V _{BE}	I _C	I _B	MIN.	MAX.	MIN.	MAX.	MIN.	MAX.		
Collector-Cutoff Current: With emitter open and $T_C = 200^\circ\text{C}$	I _{CBO}	45 60 80				0 0 0		2	-	-	-	-	-	-	mA
With base-emitter junction reverse-biased	I _{CEX}		45 60 80		-1.5 -1.5 -1.5			1	-	-	-	-	-	-	
Emitter-Cutoff Current	I _{EBO}			7				5	-	5	-	5	-	5	mA
Collector-to-Emitter Sustaining Voltage: With base open	V _{CEO(sus)}					0.2 ^a	0	45	-	60	-	80	-		V
With external base-to-emitter resistance (R _{BE})=100 Ω	V _{CER(sus)}					0.2 ^a		55	-	70	-	85	-		
DC Forward Current Transfer Ratio	h _{FE}		4 4			4 ^a 3 ^a		- 20	- 70	20 -	70 -	- 20	- 70		
Base-to-Emitter Voltage	V _{BE}		4 4			3 ^a 4 ^a		- -	1.5 -	- -	- 1.5	- -	1.5 -	V	
Collector-to-Emitter Saturation Voltage	V _{CE(sat)}					4 ^a 3 ^a	0.4 ^a 0.3 ^a	- -	- 1	- -	1 -	- -	1 1	V	
Magnitude of Common-Emitter, Small- Signal, Short-Circuit, Forward Current Transfer Ratio (f = 0.4 MHz)	h _{fe}		4			1		2	-	2	-	2	-		
Gain-Bandwidth Product	f _T					1		800	-	800	-	800	-	kHz	
Common-Emitter, Short-Circuit, Small- Signal, Forward Current Transfer Ratio Cutoff Frequency	f _{hfe}		4			0.3		15	-	15	-	15	-	kHz	
Forward-Bias Second Breakdown Collector Current (t ≥ 1 s)	I _{S/b}		30					3.95	-	3.95	-	3.95	-	A	
Thermal Resistance (Junction-to-Case)	R _{θJC}							-	1.5	-	1.5	-	1.5	°C/W	

^a Pulsed: Pulse duration = 300 μs, duty factor = 1.8%.

Pro Electron Power Transistors

BD181, BD182, BD183

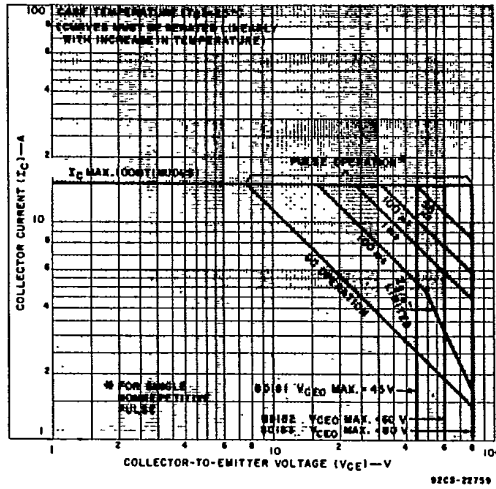


Fig. 1 — Maximum operating areas for all types.

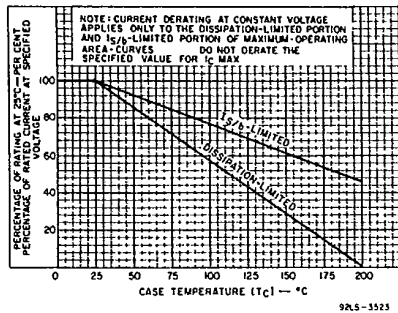


Fig. 2 — Dissipation and I_{Sb} derating of all types.

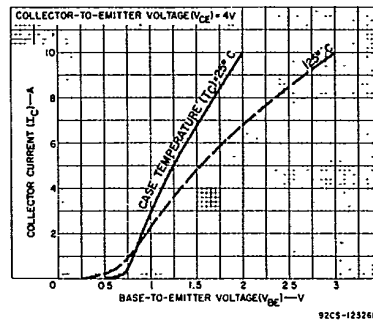


Fig. 3 — Typical transfer characteristics for all types.

BD181, BD182, BD183

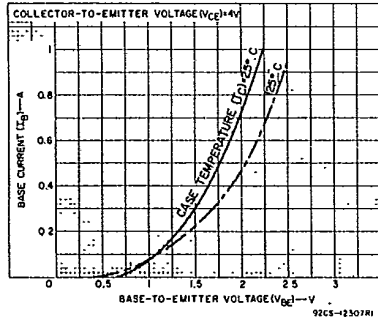


Fig. 4 — Typical input characteristics for BD182.

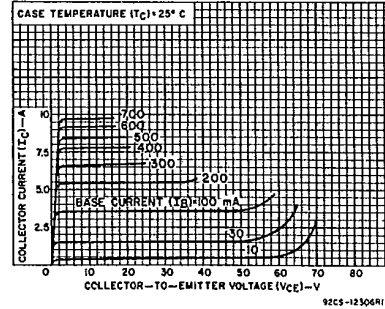


Fig. 5 — Typical output characteristics for BD182.

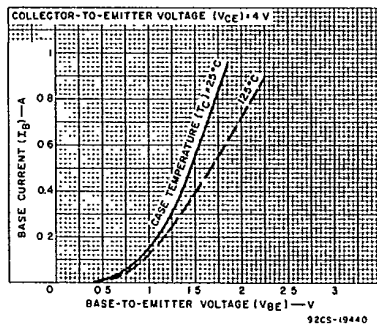


Fig. 6 — Typical input characteristics for BD181 and BD183.

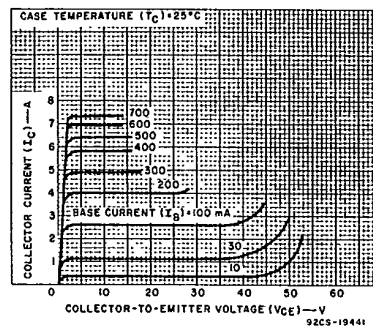


Fig. 7 — Typical output characteristics for BD181 and BD183.

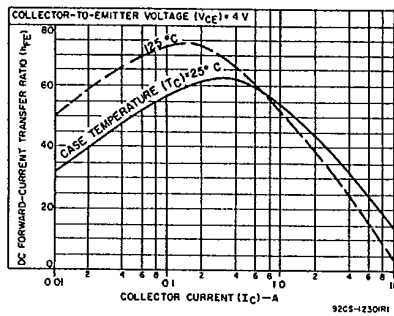


Fig. 8 — Typical dc-beta characteristics for BD182.

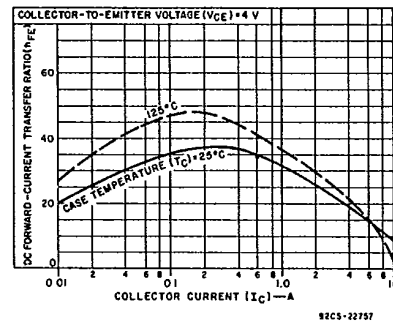


Fig. 9 — Typical dc-beta characteristics for BD181 and BD183.

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.