

2N1893

Features

- Meets MIL-S-19500/182
- Collector-Base Voltage 120
- Collector Current: 0.5 mA
- Fast Switching 30 nS


**120 Volts
0.5 Amps**

**NPN
BIPOLAR
TRANSISTOR**

Maximum Ratings

RATING	SYMBOL	MAX.	UNIT
Collector-Emitter Voltage	V_{CEO}	80	Vdc
Collector-Emitter Voltage	V_{CER}	100	Vdc
Collector-Base Voltage	V_{CBO}	120	Vdc
Emitter-Base Voltage	V_{EBO}	7.0	Vdc
Collector Current - Continuous	I_C	0.5	Adc
Total Device Dissipation @ $T_A = 25^\circ\text{C}$ Derate above 25°C	P_D	0.8 4.57	Watt mW/ $^\circ\text{C}$
Total Device Dissipation @ $T_C = 25^\circ\text{C}$ Derate above 25°C	P_D	3.0 17.2	Watts mW/ $^\circ\text{C}$
Operating Temperature Range	T_J	-55 to +200	$^\circ\text{C}$
Storage Temperature Range	T_s	-55 to +200	$^\circ\text{C}$
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	219	$^\circ\text{C}/\text{W}$
Thermal Resistance, Junction to Case	$R_{\theta JA}$	58	$^\circ\text{C}/\text{W}$

Mechanical Outline

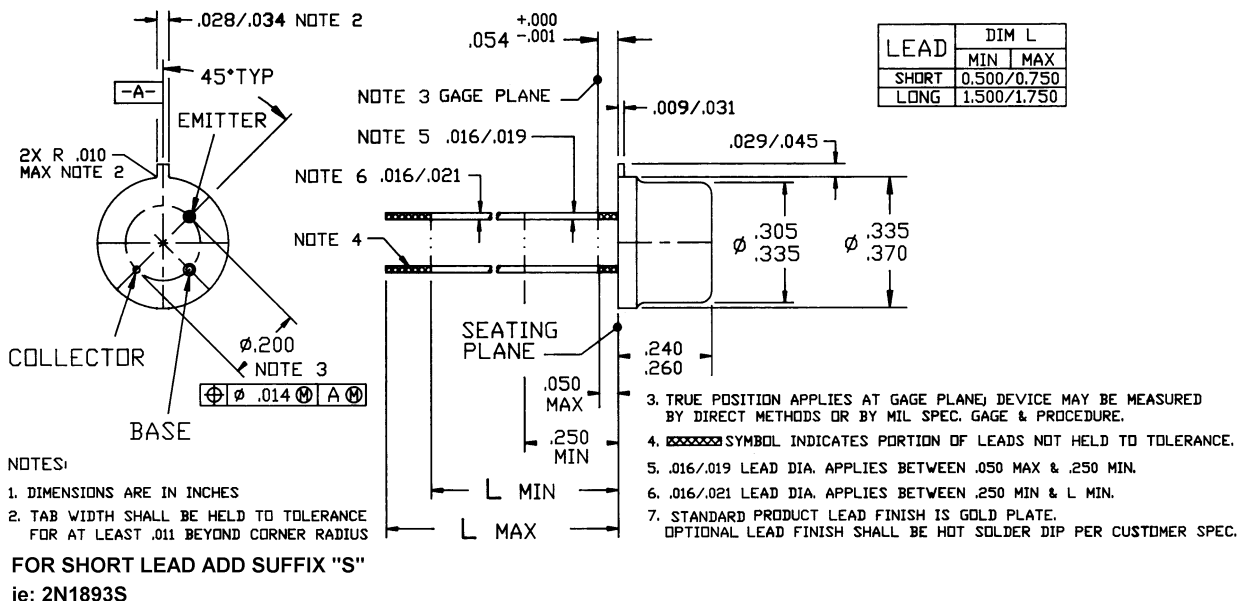

2N1893

Electrical Parameters (T_A @ 25°C unless otherwise specified)

CHARACTERISTICS	SYMBOL	MIN.	TYP.	MAX.	UNIT
Off Characteristics					
Collector-Emitter Breakdown Voltage (I _C = 100 mA _{dc} , R _{BE} = 10 ohms)(1)	BV_{CER}	100		--	V _{dc}
Collector-Emitter Sustaining Voltage(1) (I _C = 30 mA _{dc} , I _B = 0)(1)	BV_{CEO}	80		--	V _{dc}
Collector-Base Breakdown Voltage (I _C = 100 μA _{dc} , I _E = 0)	BV_{(BR)CBO}	120		--	V _{dc}
Emitter-Base Breakdown Voltage (I _E = 100 μA _{dc} , I _C = 0)	BV_{(BR)EBO}	7.0		--	V _{dc}
Collector Cutoff Current (V _{CB} = 90 V _{dc} , I _E = 0)	IC_{BO}	--		0.01	μA _{dc}
(V _{CB} = 90 V _{dc} , I _E = 0, T _A = 150°C)		--		15	
Emitter Cutoff Current (V _{EB} = 5.0 V _{dc} , I _C = 0)	IE_{BO}	--		0.01	μA _{dc}
On Characteristics					
D.C. Current Gain (I _C = 0.1 mA _{dc} , V _{CE} = 10 V _{dc})	h_{FE}	20		--	--
(I _C = 10mA _{dc} , V _{CE} = 10 V _{dc})(1)		35		--	
(I _C = 10mA _{dc} , V _{CE} = 10 V _{dc} , T _A = -55°C)(1)		20		--	
(I _C = 150mA _{dc} , V _{CE} = 10 V _{dc})(1)		40		120	
Collector-Emitter Saturation Voltage(1) (I _C = 150 mA _{dc} , I _B = 15 mA _{dc})	V_{CE(Sat)}	--		0.5	V _{dc}
Base-Emitter Saturation Voltage(1) (I _C = 150 mA _{dc} , I _B = 15 mA _{dc})	V_{BE(Sat)}	--		1.3	V _{dc}
Magnitude of small signal short-circuit forward current ratio (I _C = 50 mA _{dc} , V _{CE} = 10 V _{dc} , f = 20 MHz)	/h_{fe}/	3		10	
Output Capacitance (V _{CB} = 10 V _{dc} , I _E = 0, f = 1.0 MHz)	C_{OBO}	5		15	pF
Input Impedance = (I _C = 5.0 mA _{dc} , V _{CB} = 10 V _{dc} , f = 1.0kHz)	h_{ib}	4.0		8.0	Ohms
Voltage Feedback Ratio (I _C = 5.0 mA _{dc} , V _{CB} = 10 V _{dc} , f = 1.0 kHz)	h_{rb}	--		1.5	X 10 ⁻⁴
Small-Signal Current Gain (I _C = 1.0 mA _{dc} , V _{CB} = 5.0V _{dc} , f = 1.0 kHz)	h_{fe}	35		100	--
(I _C = 5.0 mA _{dc} , V _{CB} = 10 V _{dc} , f = 1.0 kHz)		45		--	
Output Admittance (I _C = 5.0 mA _{dc} , V _{CB} = 10 V _{dc} , f = 1.0 kHz)	h_{ob}	--		0.5	μmho
Pulse response (V _{cc} = 20V _{dc} , I _c = 500mA _{dc})	t_{on} + t_{off}	--		30	ns

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.