


### SCR/Diode POW-R-BLOK™ Modules 25 Amperes/800 Volts



#### Outline Drawing

Dimension	Inches	Millimeters
A	3.681	93.5
B	3.150±0.012	80±0.3
C	1.181	30
D	1.024	26
E	0.827	21
F	0.787	20
G	0.689	17.5
H	0.492	12.5
J	0.354	9
K	0.256	6.5
L	0.256±0.008 Dia. Dia. 6.5±0.2	
M	M5 Metric	M5

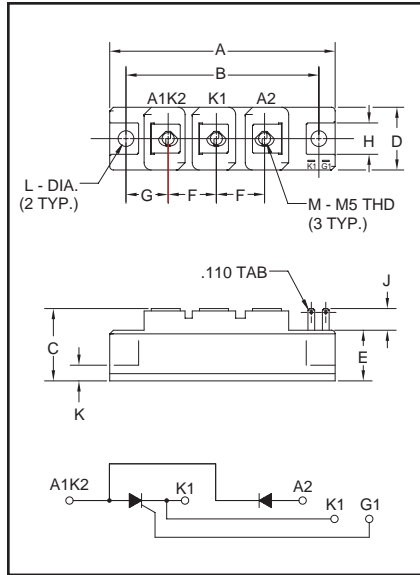

**CM4208A2  
SCR/Diode  
POW-R-BLOK™ Modules  
25 Amperes/800 Volts**

#### Description:

Powerex SCR/Diode POW-R-BLOK™ Modules are designed for use in applications requiring Half-Control and isolated packaging. The modules are isolated for easy mounting with other components on common heatsinks.

#### Features:

- Isolated Mounting
- Glass Passivated Chips
- Metal Baseplate
- Low Thermal Impedance

#### Applications:

- Battery Supplies
- Bridge Circuits
- AC and DC Motor Control
- Tap Changers
- Lighting Control

#### Ordering Information:

Select the complete eight digit module part number you desire from the table below.

Example: CM4208A2 is an 800 Volt, 25 Ampere SCR/Diode POW-R-BLOK™ Module.

Type	Voltage Volts (x100)	Current Rating Amperes (25)
CM42	08	A2



Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

**CM4208A2**  
**SCR/Diode POW-R-BLOK™ Modules**  
 25 Amperes/800 Volts

### Absolute Maximum Ratings










Characteristics	Symbol	CM4208A2	Units
Peak Forward Blocking Voltage	$V_{DRM}$	800	Volts
Transient Peak Forward Blocking Voltage (Non-Repetitive), $t < 5ms$	$V_{DSM}$	960	Volts
DC Forward Blocking Voltage	$V_{D(DC)}$	640	Volts
Peak Reverse Blocking Voltage	$V_{RRM}$	800	Volts
Transient Peak Reverse Blocking Voltage (Non-Repetitive), $t < 5ms$	$V_{RSM}$	960	Volts
DC Reverse Blocking Voltage	$V_{R(DC)}$	640	Volts
RMS On-State Current	$I_{T(RMS)}$ ; $I_{F(RMS)}$	39	Amperes
Average On-State Current, $T_C = 93^\circ C$	$I_{T(AV)}$ ; $I_{F(AV)}$	25	Amperes
Peak One-Cycle Surge (Non-Repetitive) On-State Current (60Hz)	$I_{TSM}$ ; $I_{FSM}$	490	Amperes
Peak One-Cycle Surge (Non-Repetitive) On-State Current (50Hz)	$I_{TSM}$ ; $I_{FSM}$	445	Amperes
$I^2t$ (for Fusing), 8.3 milliseconds	$I^2t$	1000	A <sup>2</sup> sec
Critical Rate-of-Rise of On-State Current*	$di/dt$	100	Amperes/ $\mu s$
Peak Gate Power Dissipation	$P_{GM}$	5.0	Watts
Average Gate Power Dissipation	$P_{G(AV)}$	0.5	Watts
Peak Forward Gate Voltage	$V_{GFM}$	10	Volts
Peak Reverse Gate Voltage	$V_{GRM}$	5.0	Volts
Peak Forward Gate Current	$I_{GFM}$	2.0	Amperes
Storage Temperature	$T_{STG}$	-40 to 125	$^\circ C$
Operating Temperature	$T_j$	-40 to 125	$^\circ C$
Maximum Mounting Torque M6 Mounting Screw	—	26	in.-lb.
Maximum Mounting Torque M5 Terminal Screw	—	17	in.-lb.
Module Weight (Typical)	—	160	
V Isolation	$V_{RMS}$	2000	Volts

\* $T_j = 125^\circ C$ ,  $I_G = 0.5A$ ,  $V_D = 1/2 V_{DRM}$

### Electrical and Thermal Characteristics, $T_j = 25^\circ C$ unless otherwise specified


Characteristics	Symbol	Test Conditions	CM4208A2	Units
<b>Blocking State Maximums</b>				
Forward Leakage Current, Peak	$I_{DRM}$	$T_j = 125^\circ C$ , $V_{DRM} = \text{Rated}$	4.0	mA
Reverse Leakage Current, Peak	$I_{RRM}$	$T_j = 125^\circ C$ , $V_{RRM} = \text{Rated}$	4.0	mA
<b>Conducting State Maximums</b>				
Peak On-State Voltage	$V_{FM}$ , $V_{TM}$	$I_{FM} = 75A$ , $I_{TM} = 75A$	1.5	Volts
<b>Switching Minimums</b>				
Critical Rate-of-Rise of Off-State Voltage	$dv/dt$	$T_j = 125^\circ C$ , $V_D = 2/3 V_{DRM}$	500	Volts/ $\mu s$
<b>Thermal Maximums</b>				
Thermal Resistance, Junction-to-Case	$R_{\theta(J-C)}$	Per Module	0.8	$^\circ C/Watt$
Thermal Resistance, Case-to-Sink (Lubricated)	$R_{\theta(C-S)}$	Per Module	0.2	$^\circ C/Watt$
<b>Gate Parameters Maximums</b>				
Gate Current-to-Trigger	$I_{GT}$	$V_D = 6V$ , $R_L = 2\Omega$	50	mA
Gate Voltage-to-Trigger	$V_{GT}$	$V_D = 6V$ , $R_L = 2\Omega$	3.0	Volts
Non-Triggering Gate Voltage	$V_{GDM}$	$T_j = 125^\circ C$ , $V_D = 1/2 V_{DRM}$	0.25	Volts

**CM4208A2**  
**SCR/Diode POW-R-BLOK™ Modules**  
 25 Amperes/800 Volts

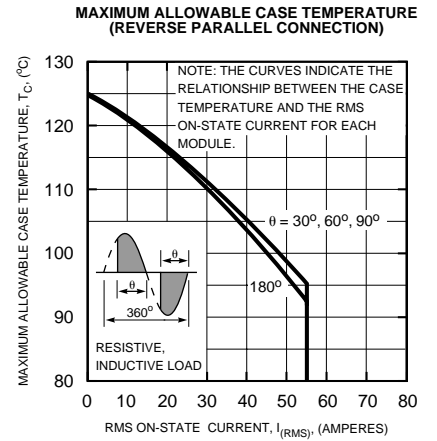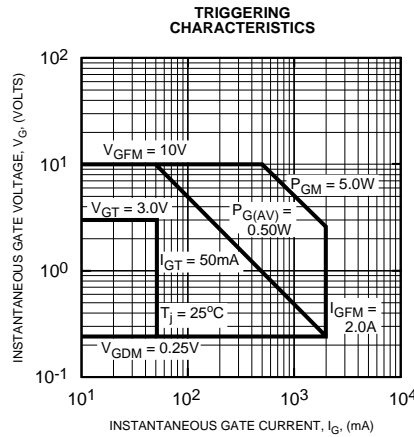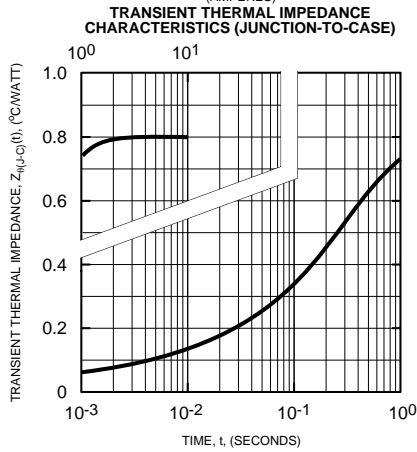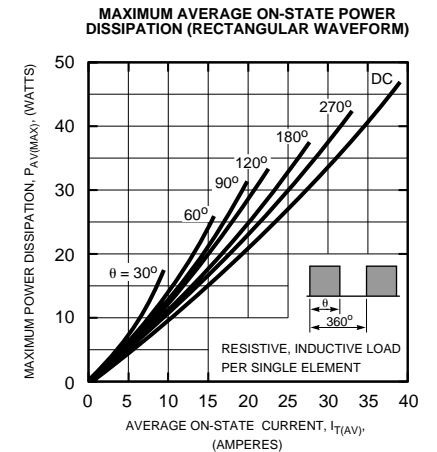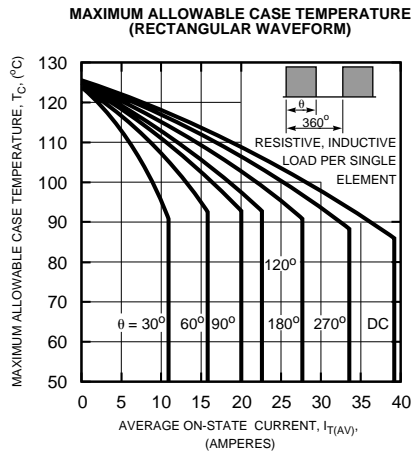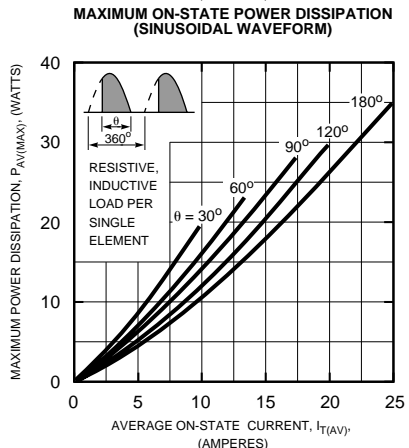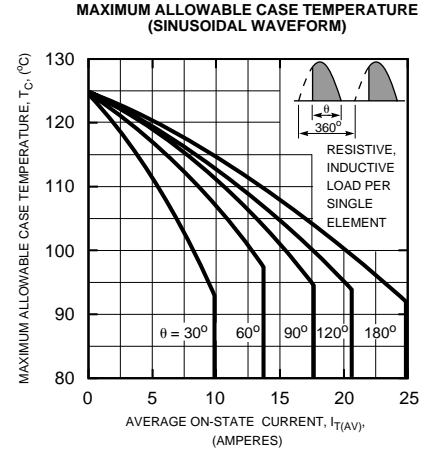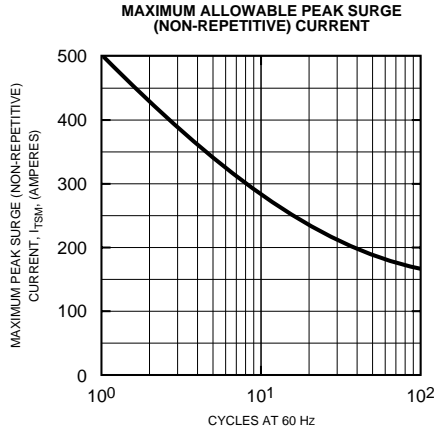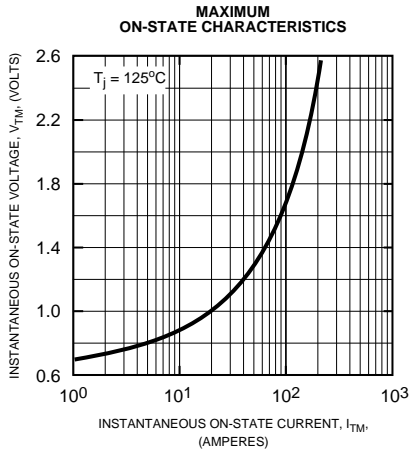


**CM4208A2**  
**SCR/Diode POW-R-BLOK™ Modules**  
 25 Amperes/800 Volts

**MAXIMUM ON-STATE POWER DISSIPATION (REVERSE PARALLEL CONNECTION)**

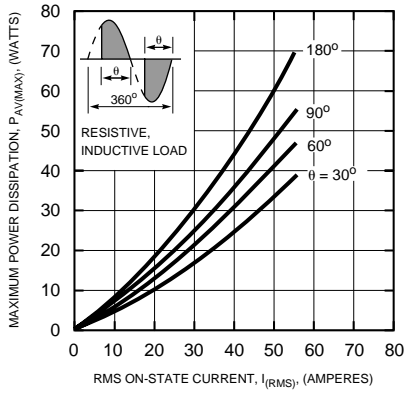


NOTE: THE CURVES INDICATE THE RELATIONSHIP BETWEEN THE AVERAGE ON-STATE POWER DISSIPATION PER MODULE AND THE RMS ON-STATE CURRENT.

**MAXIMUM ALLOWABLE CASE TEMPERATURE (SINGLE PHASE BRIDGE CONNECTION)**

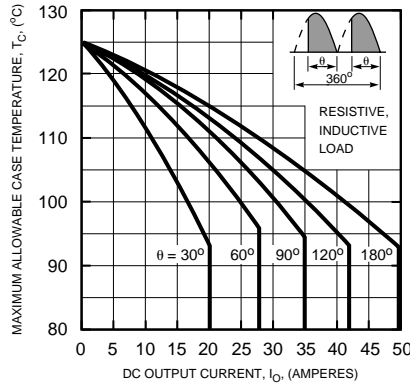


NOTE: THE CURVES INDICATE THE RELATIONSHIP BETWEEN THE CASE TEMPERATURE AND THE DC OUTPUT CURRENT (FOR TWO ELEMENTS) WHEN USED IN THE SINGLE PHASE BRIDGE CONFIGURATION.

**MAXIMUM ON-STATE POWER DISSIPATION (SINGLE PHASE BRIDGE CONNECTION)**

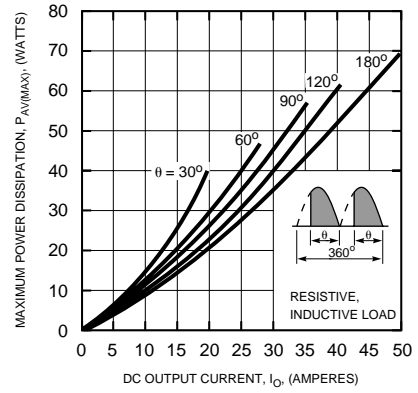


NOTE: THE CURVES INDICATE THE RELATIONSHIP BETWEEN THE AVERAGE ON-STATE POWER DISSIPATION AND THE DC OUTPUT CURRENT FOR THE SINGLE PHASE BRIDGE CONFIGURATION (POWER DISSIPATION EXPRESSED FOR EACH MODULE AND DC OUTPUT CURRENT EXPRESSED FOR THE PAIR)

**MAXIMUM ALLOWABLE CASE TEMPERATURE (THREE PHASE BRIDGE CONNECTION)**

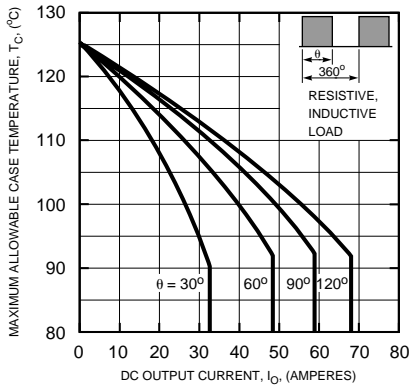

NOTE: THE CURVES INDICATE THE RELATIONSHIP BETWEEN THE CASE TEMPERATURE AND THE DC OUTPUT CURRENT (FOR THREE MODULES) IN THE THREE PHASE CONFIGURATION.

**MAXIMUM ON-STATE POWER DISSIPATION (THREE PHASE BRIDGE CONNECTION)**

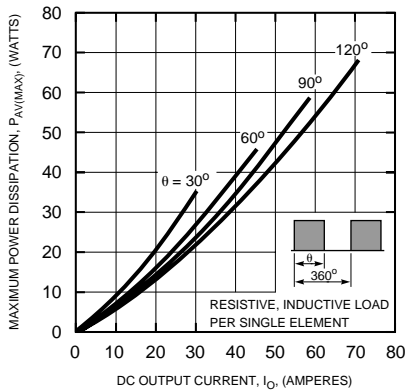

NOTE: THE CURVES INDICATE THE RELATIONSHIP BETWEEN THE ON-STATE POWER DISSIPATION (PER MODULE) AND THE DC OUTPUT CURRENT (FOR THREE MODULES) IN THE THREE PHASE BRIDGE CONFIGURATION.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.