


Tuner Diodes

Si Epitaxial Planar Capacitance Diode with very high effective capacitance ratio for tuning the whole VHF range in TV receivers, also suited for CTV.

These diodes are delivered matched according to the tracking condition described below.

The diodes are delivered taped.
Details see "Taping".




Glass case JEDEC DO-35
54 A 2 according to DIN 41 880

Weight approx. 0.13 g
Dimensions in mm


Absolute Maximum Ratings (T_a = 25 °C)

	Symbol	Value	Unit
Reverse Voltage	V _R	32	V
Junction Temperature	T _J	125	°C
Storage Temperature Range	T _S	-55 to + 150	°C



Characteristics at $T_{amb} = 25\text{ }^{\circ}\text{C}$


	Symbol	Min.	Typ.	Max.	Unit
Capacitance at $f = 1\text{ MHz}$ at $V_R = 1\text{ V}$ at $V_R = 3\text{ V}$	C_{tot} C_{tot}	- 2.5	35 -	- 3.2	pF pF
Effective Capacitance Ratio at $V_R = 1\text{ to }28\text{ V}$	$\frac{C_{tot}(1V)}{C_{tot}(28V)}$	12	-	-	-
Series Resistance at $f = 330\text{ MHz}$, $C_{tot} = 25\text{ pF}$	r_s	-	0.85	-	Ω
Q-Factor at $f = 50\text{ MHz}$, $V_R = 3\text{ V}$ at $f = 300\text{ MHz}$, $V_R = 25\text{ V}$	Q Q	- -	180 250	- -	- -
Cutoff Frequency for $Q = 1$ at $V_R = 3\text{ V}$	f_{Q1}	-	9	-	GHz
Series Resonance Frequency at $V_R = 25\text{ V}$	f_0	-	1.5	-	GHz
Series Inductance (1.5 mm from case)	L_s	-	2.5	-	nH
Leakage Current at $V_R = 30\text{ V}$	I_R	-	-	30	nA
Reverse Breakdown Voltage at $I_R = 10\text{ }\mu\text{A}$	$V_{(BR)R}$	32	-	-	V
For any two diodes of a matched group the following tracking condition applies: In the reverse bias voltage range of $V_R = 0.5\text{ V}$ to $V_R = 28\text{ V}$ the maximum capacitance deviation is 2.5 %.					


SEMTECH ELECTRONICS LTD.


(wholly owned subsidiary of HONEY TECHNOLOGY LTD.)




Capacitance
versus reverse voltage

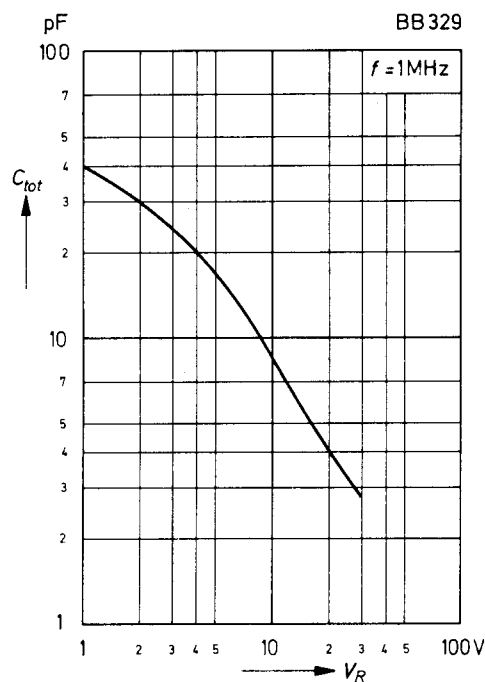



Leakage current
versus reverse voltage

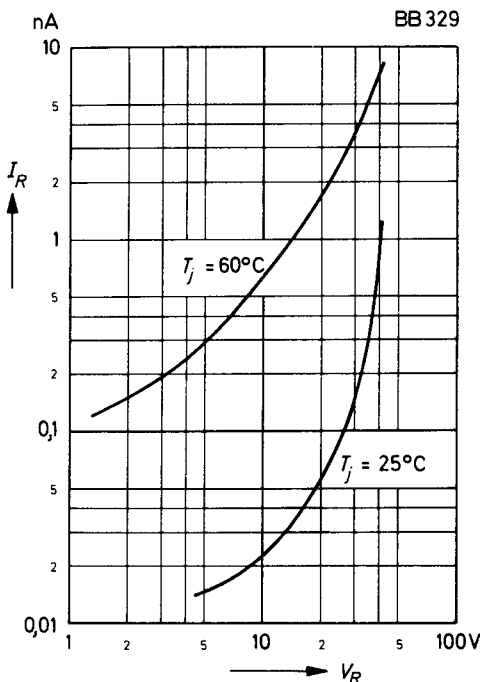

Capacitance
versus junction temperature
(relative values)

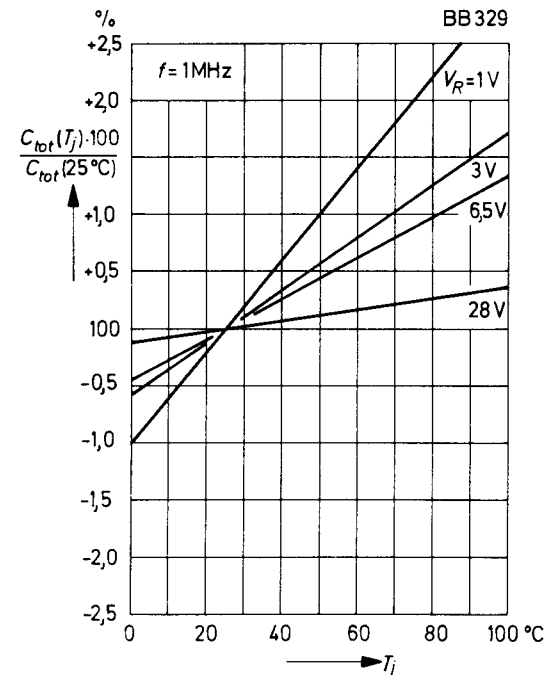

Q-Factor
versus frequency

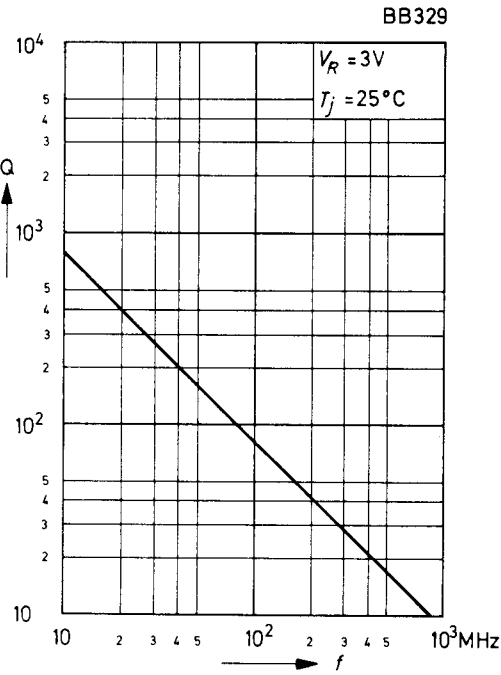



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.