


# DATA SHEET

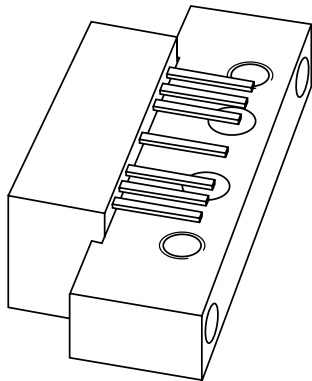

## **BGD802**

**860 MHz, 18.5 dB gain  
power doubler amplifier**

Product specification  
Supersedes data of 2001 Oct 30

2002 Jan 23

# 860 MHz, 18.5 dB gain power doubler amplifier

# BGD802

### FEATURES

- Excellent linearity
- Extremely low noise
- Excellent return loss properties
- Silicon nitride passivation
- Rugged construction
- Gold metallization ensures excellent reliability.

### APPLICATIONS


- CATV systems operating in the 40 to 860 MHz frequency range.

### DESCRIPTION

Hybrid amplifier module in a SOT115J package operating at a supply voltage of 24 V (DC).

### PINNING - SOT115J

| PIN  | DESCRIPTION     |
|------|-----------------|
| 1    | input           |
| 2, 3 | common          |
| 5    | +V <sub>B</sub> |
| 7, 8 | common          |
| 9    | output          |

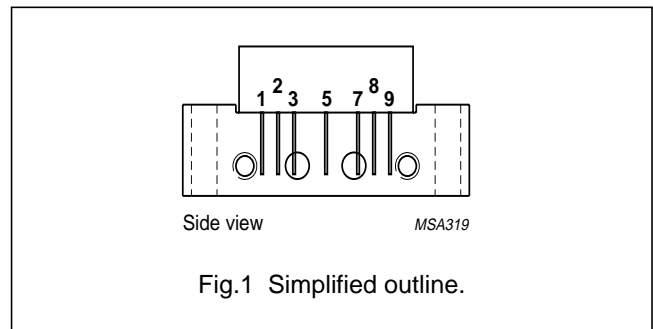

### QUICK REFERENCE DATA

| SYMBOL           | PARAMETER                      | CONDITIONS            | MIN. | MAX. | UNIT |
|------------------|--------------------------------|-----------------------|------|------|------|
| G <sub>p</sub>   | power gain                     | f = 50 MHz            | 18   | 19   | dB   |
|                  |                                | f = 860 MHz           | 18.5 | –    | dB   |
| I <sub>tot</sub> | total current consumption (DC) | V <sub>B</sub> = 24 V | –    | 410  | mA   |

### LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 60134).

| SYMBOL           | PARAMETER                           | MIN. | MAX. | UNIT |
|------------------|-------------------------------------|------|------|------|
| V <sub>B</sub>   | supply voltage                      | –    | 25   | V    |
| V <sub>i</sub>   | RF input voltage                    | –    | 65   | dBmV |
| T <sub>stg</sub> | storage temperature                 | –40  | +100 | °C   |
| T <sub>mb</sub>  | operating mounting base temperature | –20  | +100 | °C   |

## 860 MHz, 18.5 dB gain power doubler amplifier

BGD802

## CHARACTERISTICS

**Table 1** Bandwidth 40 to 860 MHz;  $V_B = 24$  V;  $T_{case} = 35$  °C;  $Z_S = Z_L = 75$   $\Omega$ 

| SYMBOL    | PARAMETER                         | CONDITIONS   | MIN. | TYP.      | MAX.      | UNIT |
|-----------|-----------------------------------|--|------|-----------|-----------|------|
| $G_p$     | power gain                        | f = 50 MHz   | 18   | 18.5      | 19        | dB   |
|           |                                   | f = 860 MHz  | 18.5 | 19.5      | –         | dB   |
| SL        | slope cable equivalent            | f = 40 to 860 MHz  | 0.2  | 1.1       | 2         | dB   |
| FL        | flatness of frequency response    | f = 40 to 860 MHz  | –    | $\pm 0.2$ | $\pm 0.5$ | dB   |
| $S_{11}$  | input return losses               | f = 40 to 80 MHz   | 20   | 35        | –         | dB   |
|           |                                   | f = 80 to 160 MHz  | 18.5 | 31        | –         | dB   |
|           |                                   | f = 160 to 320 MHz   | 17   | 27        | –         | dB   |
|           |                                   | f = 320 to 640 MHz   | 15.5 | 22        | –         | dB   |
|           |                                   | f = 640 to 860 MHz   | 14   | 20        | –         | dB   |
| $S_{22}$  | output return losses              | f = 40 to 80 MHz   | 20   | 29.5      | –         | dB   |
|           |                                   | f = 80 to 160 MHz  | 18.5 | 29        | –         | dB   |
|           |                                   | f = 160 to 320 MHz   | 17   | 25.5      | –         | dB   |
|           |                                   | f = 320 to 640 MHz   | 15.5 | 23        | –         | dB   |
|           |                                   | f = 640 to 860 MHz   | 14   | 22        | –         | dB   |
| $S_{21}$  | phase response                    | f = 50 MHz   | –45  | –         | +45       | deg  |
| CTB       | composite triple beat             | 49 channels flat; $V_o = 47$ dBmV;<br>measured at 859.25 MHz | –    | –66       | –63       | dB   |
| $X_{mod}$ | cross modulation                  | 49 channels flat; $V_o = 47$ dBmV;<br>measured at 55.25 MHz  | –    | –65       | –62       | dB   |
| CSO       | composite second order distortion | 49 channels flat; $V_o = 47$ dBmV;<br>measured at 860.5 MHz  | –    | –67.5     | –60       | dB   |
| $d_2$     | second order distortion           | note 1   | –    | –75       | –69       | dB   |
| $V_o$     | output voltage                    | $d_{im} = -60$ dB; note 2                                    | 61.5 | 63.5      | –         | dBmV |
| NF        | noise figure                      | f = 50 MHz   | –    | 4.5       | 5.5       | dB   |
|           |                                   | f = 550 MHz  | –    | –         | 6         | dB   |
|           |                                   | f = 650 MHz  | –    | –         | 7         | dB   |
|           |                                   | f = 750 MHz  | –    | –         | 7.5       | dB   |
|           |                                   | f = 860 MHz  | –    | 6.5       | 9         | dB   |
| $I_{tot}$ | total current consumption (DC)    | note 3   | –    | 395       | 410       | mA   |

## Notes

- $f_p = 55.25$  MHz;  $V_p = 44$  dBmV;  
 $f_q = 805.25$  MHz;  $V_q = 44$  dBmV;  
measured at  $f_p + f_q = 860.5$  MHz.
- Measured according to DIN45004B:  
 $f_p = 851.25$  MHz;  $V_p = V_o$ ;  
 $f_q = 858.25$  MHz;  $V_q = V_o - 6$  dB;  
 $f_r = 860.25$  MHz;  $V_r = V_o - 6$  dB;  
measured at  $f_p + f_q - f_r = 849.25$  MHz.
- The module normally operates at  $V_B = 24$  V, but is able to withstand supply transients up to 30 V.

## 860 MHz, 18.5 dB gain power doubler amplifier

## BGD802

**Table 2** Bandwidth 40 to 860 MHz;  $V_B = 24$  V;  $T_{case} = 30$  °C;  $Z_S = Z_L = 75$   $\Omega$ 

| SYMBOL           | PARAMETER                         | CONDITIONS  | MIN. | TYP.  | MAX. | UNIT |
|------------------|-----------------------------------|---|------|-------|------|------|
| G <sub>p</sub>   | power gain                        | f = 50 MHz  | 18   | 18.5  | 19   | dB   |
|                  |                                   | f = 860 MHz   | 18.5 | 19.5  | –    | dB   |
| SL               | slope cable equivalent            | f = 40 to 860 MHz   | 0.2  | 1.1   | 2    | dB   |
| FL               | flatness of frequency response    | f = 40 to 860 MHz   | –    | ±0.2  | ±0.5 | dB   |
| S <sub>11</sub>  | input return losses               | f = 40 to 80 MHz  | 20   | 35    | –    | dB   |
|                  |                                   | f = 80 to 160 MHz   | 18.5 | 31    | –    | dB   |
|                  |                                   | f = 160 to 320 MHz  | 17   | 27    | –    | dB   |
|                  |                                   | f = 320 to 640 MHz  | 15.5 | 22    | –    | dB   |
|                  |                                   | f = 640 to 860 MHz  | 14   | 20    | –    | dB   |
| S <sub>22</sub>  | output return losses              | f = 40 to 80 MHz  | 20   | 29.5  | –    | dB   |
|                  |                                   | f = 80 to 160 MHz   | 18.5 | 29    | –    | dB   |
|                  |                                   | f = 160 to 320 MHz  | 17   | 25.5  | –    | dB   |
|                  |                                   | f = 320 to 640 MHz  | 15.5 | 23    | –    | dB   |
|                  |                                   | f = 640 to 860 MHz  | 14   | 22    | –    | dB   |
| S <sub>21</sub>  | phase response                    | f = 50 MHz  | –45  | –     | +45  | deg  |
| CTB              | composite triple beat             | 129 channels flat;<br>V <sub>o</sub> = 44 dBmV;<br>measured at 859.25 MHz | –    | –56.5 | –54  | dB   |
| X <sub>mod</sub> | cross modulation                  | 129 channels flat;<br>V <sub>o</sub> = 44 dBmV;<br>measured at 55.25 MHz  | –    | –61   | –59  | dB   |
| CSO              | composite second order distortion | 129 channels flat;<br>V <sub>o</sub> = 44 dBmV;<br>measured at 860.5 MHz  | –    | –64.5 | –56  | dB   |
| d <sub>2</sub>   | second order distortion           | note 1  | –    | –75   | –69  | dB   |
| V <sub>o</sub>   | output voltage                    | d <sub>im</sub> = –60 dB; note 2  | 61.5 | 63    | –    | dBmV |
| NF               | noise figure                      | see Table 1   | –    | –     | –    | dB   |
| I <sub>tot</sub> | total current consumption (DC)    | note 3  | –    | 395   | 410  | mA   |

**Notes**

1. f<sub>p</sub> = 55.25 MHz; V<sub>p</sub> = 44 dBmV;  
f<sub>q</sub> = 805.25 MHz; V<sub>q</sub> = 44 dBmV;  
measured at f<sub>p</sub> + f<sub>q</sub> = 860.5 MHz.
2. Measured according to DIN45004B:  
f<sub>p</sub> = 851.25 MHz; V<sub>p</sub> = V<sub>o</sub>;  
f<sub>q</sub> = 858.25 MHz; V<sub>q</sub> = V<sub>o</sub> –6 dB;  
f<sub>r</sub> = 860.25 MHz; V<sub>r</sub> = V<sub>o</sub> –6 dB;  
measured at f<sub>p</sub> + f<sub>q</sub> – f<sub>r</sub> = 849.25 MHz.
3. The module normally operates at V<sub>B</sub> = 24 V, but is able to withstand supply transients up to 30 V.

## 860 MHz, 18.5 dB gain power doubler amplifier

## BGD802

**Table 3** Bandwidth 40 to 750 MHz;  $V_B = 24$  V;  $T_{case} = 30$  °C;  $Z_S = Z_L = 75$   $\Omega$ 

| SYMBOL           | PARAMETER                         | CONDITIONS  | MIN. | TYP.  | MAX. | UNIT |
|------------------|-----------------------------------|---|------|-------|------|------|
| G <sub>p</sub>   | power gain                        | f = 50 MHz  | 18   | 18.5  | 19   | dB   |
|                  |                                   | f = 750 MHz   | 18.5 | 19.4  | –    | dB   |
| SL               | slope cable equivalent            | f = 40 to 750 MHz   | 0.2  | –     | 2    | dB   |
| FL               | flatness of frequency response    | f = 40 to 750 MHz   | –    | –     | ±0.5 | dB   |
| S <sub>11</sub>  | input return losses               | f = 40 to 80 MHz  | 20   | 35    | –    | dB   |
|                  |                                   | f = 80 to 160 MHz   | 18.5 | 31    | –    | dB   |
|                  |                                   | f = 160 to 320 MHz  | 17   | 27    | –    | dB   |
|                  |                                   | f = 320 to 640 MHz  | 15.5 | 22    | –    | dB   |
|                  |                                   | f = 640 to 750 MHz  | 14   | 20    | –    | dB   |
| S <sub>22</sub>  | output return losses              | f = 40 to 80 MHz  | 20   | 29.5  | –    | dB   |
|                  |                                   | f = 80 to 160 MHz   | 18.5 | 29    | –    | dB   |
|                  |                                   | f = 160 to 320 MHz  | 17   | 25.5  | –    | dB   |
|                  |                                   | f = 320 to 640 MHz  | 15.5 | 23    | –    | dB   |
|                  |                                   | f = 640 to 750 MHz  | 14   | 22    | –    | dB   |
| S <sub>21</sub>  | phase response                    | f = 50 MHz  | –45  | –     | +45  | deg  |
| CTB              | composite triple beat             | 110 channels flat;<br>V <sub>o</sub> = 44 dBmV;<br>measured at 745.25 MHz | –    | –60.5 | –58  | dB   |
| X <sub>mod</sub> | cross modulation                  | 110 channels flat;<br>V <sub>o</sub> = 44 dBmV;<br>measured at 55.25 MHz  | –    | –62.5 | –60  | dB   |
| CSO              | composite second order distortion | 110 channels flat;<br>V <sub>o</sub> = 44 dBmV;<br>measured at 746.5 MHz  | –    | –66   | –60  | dB   |
| d <sub>2</sub>   | second order distortion           | note 1  | –    | –     | –72  | dB   |
| V <sub>o</sub>   | output voltage                    | d <sub>im</sub> = –60 dB; note 2  | 64   | –     | –    | dBmV |
| NF               | noise figure                      | see Table 1   | –    | –     | –    | dB   |
| I <sub>tot</sub> | total current consumption (DC)    | note 3  | –    | 395   | 410  | mA   |

**Notes**

1.  $f_p = 55.25$  MHz;  $V_p = 44$  dBmV;  
 $f_q = 691.25$  MHz;  $V_q = 44$  dBmV;  
measured at  $f_p + f_q = 746.5$  MHz.
2. Measured according to DIN45004B:  
 $f_p = 740.25$  MHz;  $V_p = V_o$ ;  
 $f_q = 747.25$  MHz;  $V_q = V_o - 6$  dB;  
 $f_r = 749.25$  MHz;  $V_r = V_o - 6$  dB;  
measured at  $f_p + f_q - f_r = 738.25$  MHz.
3. The module normally operates at  $V_B = 24$  V, but is able to withstand supply transients up to 30 V.

## 860 MHz, 18.5 dB gain power doubler amplifier

## BGD802

**Table 4** Bandwidth 40 to 550 MHz;  $V_B = 24$  V;  $T_{case} = 30$  °C;  $Z_S = Z_L = 75$   $\Omega$ 

| SYMBOL           | PARAMETER                         | CONDITIONS   | MIN. | TYP. | MAX. | UNIT |
|------------------|-----------------------------------|--|------|------|------|------|
| G <sub>p</sub>   | power gain                        | f = 50 MHz   | 18   | 18.5 | 19   | dB   |
|                  |                                   | f = 550 MHz  | 18.5 | 19.3 | –    | dB   |
| SL               | slope cable equivalent            | f = 40 to 550 MHz  | 0.2  | –    | 2    | dB   |
| FL               | flatness of frequency response    | f = 40 to 550 MHz  | –    | –    | ±0.3 | dB   |
| S <sub>11</sub>  | input return losses               | f = 40 to 80 MHz   | 20   | 35   | –    | dB   |
|                  |                                   | f = 80 to 160 MHz  | 18.5 | 31   | –    | dB   |
|                  |                                   | f = 160 to 320 MHz   | 17   | 27   | –    | dB   |
|                  |                                   | f = 320 to 550 MHz   | 16   | 22   | –    | dB   |
| S <sub>22</sub>  | input return losses               | f = 40 to 80 MHz   | 20   | 29.5 | –    | dB   |
|                  |                                   | f = 80 to 160 MHz  | 18.5 | 29   | –    | dB   |
|                  |                                   | f = 160 to 320 MHz   | 17   | 25.5 | –    | dB   |
|                  |                                   | f = 320 to 550 MHz   | 16   | 23   | –    | dB   |
| S <sub>21</sub>  | phase response                    | f = 50 MHz   | –45  | –    | +45  | deg  |
| CTB              | composite triple beat             | 77 channels flat;<br>V <sub>o</sub> = 44 dBmV;<br>measured at 547.25 MHz | –    | –67  | –65  | dB   |
| X <sub>mod</sub> | cross modulation                  | 77 channels flat;<br>V <sub>o</sub> = 44 dBmV;<br>measured at 55.25 MHz  | –    | –66  | –63  | dB   |
| CSO              | composite second order distortion | 77 channels flat;<br>V <sub>o</sub> = 44 dBmV;<br>measured at 548.5 MHz  | –    | –67  | –63  | dB   |
| d <sub>2</sub>   | second order distortion           | note 1   | –    | –    | –72  | dB   |
| V <sub>o</sub>   | output voltage                    | d <sub>im</sub> = –60 dB; note 2   | 65   | –    | –    | dBmV |
| NF               | noise figure                      | see Table 1  | –    | –    | –    | dB   |
| I <sub>tot</sub> | total current consumption (DC)    | note 3   | –    | 395  | 410  | mA   |

**Notes**

1.  $f_p = 55.25$  MHz;  $V_p = 44$  dBmV;  
 $f_q = 493.25$  MHz;  $V_q = 44$  dBmV;  
measured at  $f_p + f_q = 548.5$  MHz.
2. Measured according to DIN45004B:  
 $f_p = 540.25$  MHz;  $V_p = V_o$ ;  
 $f_q = 547.25$  MHz;  $V_q = V_o - 6$  dB;  
 $f_r = 549.25$  MHz;  $V_r = V_o - 6$  dB;  
measured at  $f_p + f_q - f_r = 538.25$  MHz.
3. The module normally operates at  $V_B = 24$  V, but is able to withstand supply transients up to 30 V.


860 MHz, 18.5 dB gain power doubler amplifier

BGD802

PACKAGE OUTLINE

Rectangular single-ended package; aluminium flange; 2 vertical mounting holes; 2 x 6-32 UNC and 2 extra horizontal mounting holes; 7 gold-plated in-line leads

SOT115J

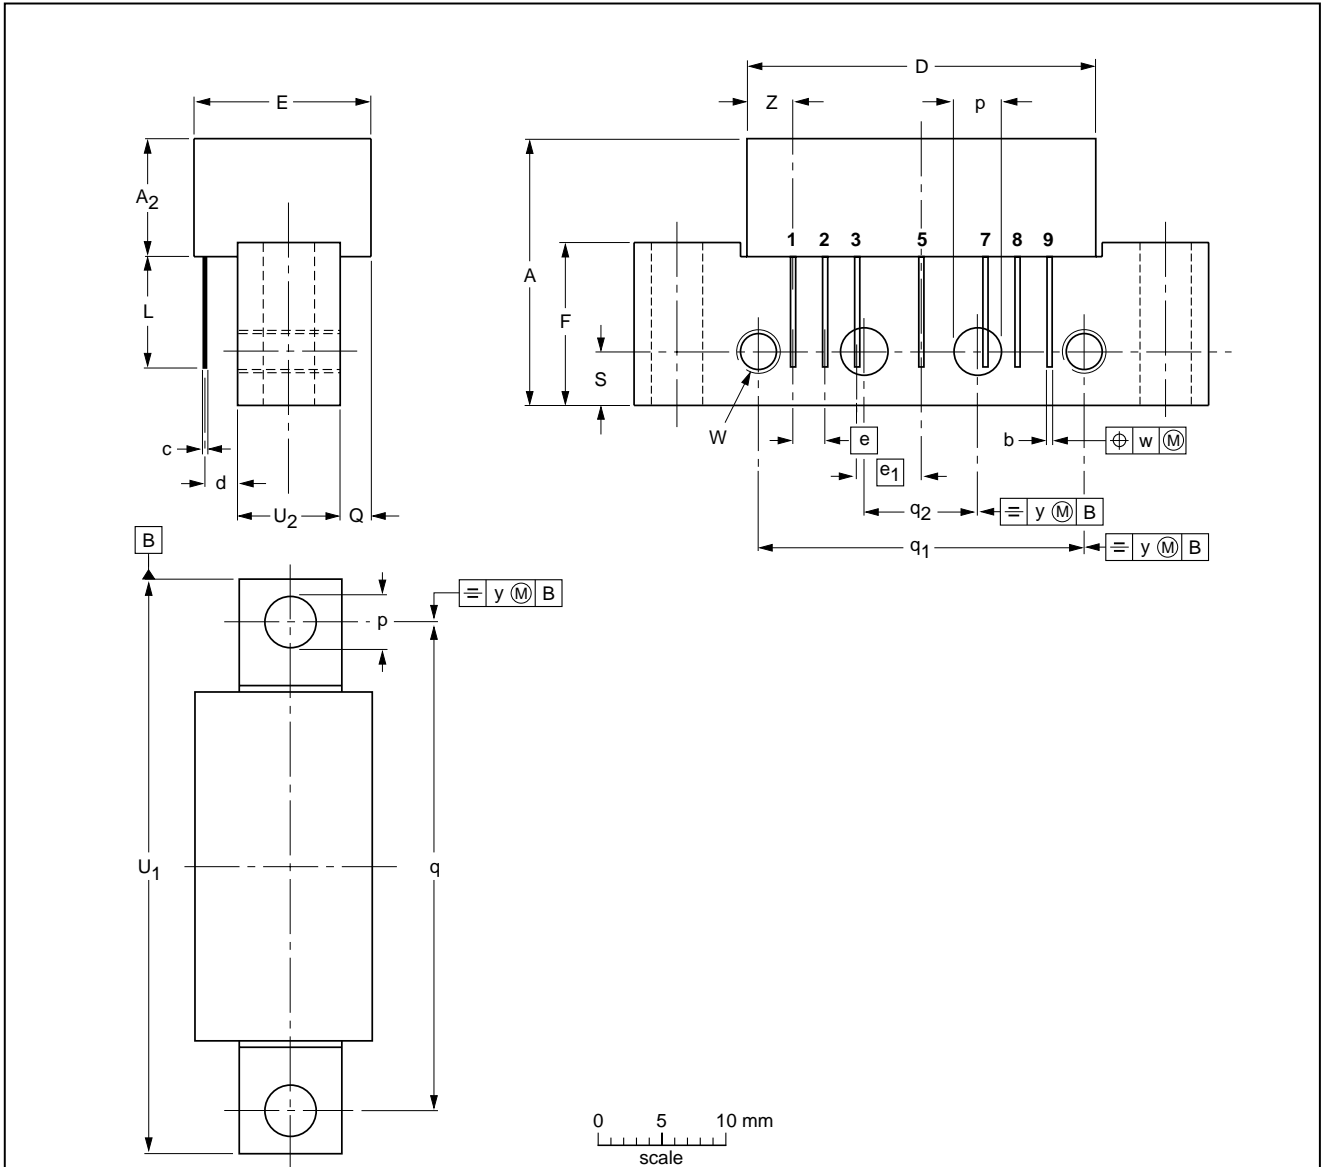

DIMENSIONS (mm are the original dimensions)

| UNIT | A max. | A <sub>2</sub> max. | b            | c    | D max. | d max. | E max. | e    | e <sub>1</sub> | F    | L min. | p            | Q max. | q    | q <sub>1</sub> | q <sub>2</sub> | S   | U <sub>1</sub> max. | U <sub>2</sub> | W           | w    | y   | Z max. |
|------|--------|---------------------|--------------|------|--------|--------|--------|------|----------------|------|--------|--------------|--------|------|----------------|----------------|-----|---------------------|----------------|-------------|------|-----|--------|
| mm   | 20.8   | 9.1                 | 0.51<br>0.38 | 0.25 | 27.2   | 2.54   | 13.75  | 2.54 | 5.08           | 12.7 | 8.8    | 4.15<br>3.85 | 2.4    | 38.1 | 25.4           | 10.2           | 4.2 | 44.75               | 8              | 6-32<br>UNC | 0.25 | 0.1 | 3.8    |

| OUTLINE VERSION | REFERENCES |       |      |  | EUROPEAN PROJECTION | ISSUE DATE |
|-----------------|------------|-------|------|--|---------------------|------------|
|                 | IEC        | JEDEC | EIAJ |  |                     |            |
| SOT115J         |            |       |      |  |                     | 99-02-06   |

## 860 MHz, 18.5 dB gain power doubler amplifier

BGD802

## DATA SHEET STATUS

| DATA SHEET STATUS <sup>(1)</sup> | PRODUCT STATUS <sup>(2)</sup> | DEFINITIONS  |
|----------------------------------|-------------------------------|--|
| Objective data                   | Development                   | This data sheet contains data from the objective specification for product development. Philips Semiconductors reserves the right to change the specification in any manner without notice.  |
| Preliminary data                 | Qualification                 | This data sheet contains data from the preliminary specification. Supplementary data will be published at a later date. Philips Semiconductors reserves the right to change the specification without notice, in order to improve the design and supply the best possible product.                                     |
| Product data                     | Production                    | This data sheet contains data from the product specification. Philips Semiconductors reserves the right to make changes at any time in order to improve the design, manufacturing and supply. Changes will be communicated according to the Customer Product/Process Change Notification (CPCN) procedure SNW-SQ-650A. |

## Notes

1. Please consult the most recently issued data sheet before initiating or completing a design.
2. The product status of the device(s) described in this data sheet may have changed since this data sheet was published. The latest information is available on the Internet at URL <http://www.semiconductors.philips.com>.

## DEFINITIONS

**Short-form specification** — The data in a short-form specification is extracted from a full data sheet with the same type number and title. For detailed information see the relevant data sheet or data handbook.

**Limiting values definition** — Limiting values given are in accordance with the Absolute Maximum Rating System (IEC 60134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of the specification is not implied. Exposure to limiting values for extended periods may affect device reliability.

**Application information** — Applications that are described herein for any of these products are for illustrative purposes only. Philips Semiconductors make no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

## DISCLAIMERS

**Life support applications** — These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Philips Semiconductors customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips Semiconductors for any damages resulting from such application.

**Right to make changes** — Philips Semiconductors reserves the right to make changes, without notice, in the products, including circuits, standard cells, and/or software, described or contained herein in order to improve design and/or performance. Philips Semiconductors assumes no responsibility or liability for the use of any of these products, conveys no licence or title under any patent, copyright, or mask work right to these products, and makes no representations or warranties that these products are free from patent, copyright, or mask work right infringement, unless otherwise specified.

## CAUTION

This product is supplied in anti-static packing to prevent damage caused by electrostatic discharge during transport and handling. For further information, refer to Philips specs.: SNW-EQ-608, SNW-FQ-302A and SNW-FQ-302B.

860 MHz, 18.5 dB gain power doubler amplifier

BGD802

---

**NOTES**

860 MHz, 18.5 dB gain power doubler amplifier

BGD802

---

**NOTES**

860 MHz, 18.5 dB gain power doubler amplifier

BGD802

---

**NOTES**

# ***Philips Semiconductors – a worldwide company***

## **Contact information**

For additional information please visit <http://www.semiconductors.philips.com>. Fax: +31 40 27 24825

For sales offices addresses send e-mail to: [sales.addresses@www.semiconductors.philips.com](mailto:sales.addresses@www.semiconductors.philips.com).

© Koninklijke Philips Electronics N.V. 2002

SCA74

All rights are reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.

The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights.

Printed in The Netherlands

613518/07/pp12

Date of release: 2002 Jan 23

Document order number: 9397 750 09191

*Let's make things better.*

**Philips  
Semiconductors**



**PHILIPS**



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.