


BSX59
BSX60CASE 79-04, STYLE 1
TO-39 (TO-205AD)**SWITCHING TRANSISTORS**
NPN SILICON**MAXIMUM RATINGS**

Rating	Symbol	BSX 59	BSX 60	Unit
Collector-Emitter Voltage	V _{CEO}	45	30	Vdc
Collector-Emitter Voltage	V _{CES}	60	60	Vdc
Collector-Base Voltage	V _{CBO}	70	70	Vdc
Emitter-Base Voltage	V _{EBO}	5.0		Vdc
Collector Current - Continuous	I _C	1		Adc
Total Device Dissipation @ T _A = 25°C Derate above 25°C	P _D	0.8 4.57		Watt mW/°C
Total Device Dissipation @ T _C = 25°C Derate above 25°C	P _D	3.5 20		Watt mW/°C
Operating and Storage Junction Temperature Range	T _J , T _{stg}	-65 to +200		°C

Refer to 2N3725 for graphs.

3**ELECTRICAL CHARACTERISTICS** (T_A = 25°C unless otherwise noted.)


Characteristic	Symbol	Min	Max	Unit
OFF CHARACTERISTICS				
Collector-Emitter Breakdown Voltage (I _C = 10 mA, I _B = 0)	V _{(BR)CEO}	45 30		V
Collector-Base Breakdown Voltage (I _C = 10 μA, I _E = 0)	V _{(BR)CBO}	70		V
Collector Cutoff Current (V _{CB} = 40 V, I _E = 0) (V _{CB} = 40 V, I _E = 0, T _J = 150°C)	I _{CBO}		500 300	nA μA
Emitter Cutoff Current (V _{EB} = 4.0 V, I _C = 0) (V _{EB} = 4.0 V, I _E = 0, T _J = 150°C)	I _{EBO}		300 50	nA μA
Collector Cutoff Current (V _{CE} = 40 V, -V _{BE} = 4.0 V) (V _{CE} = 40 V, -V _{BE} = 4.0 V, T _J = 150°C)	I _{CEX}		500 300	nA μA
Emitter Cutoff Current (V _{CE} = 40 V, -V _{BE} = 4.0 V) (V _{CE} = 40 V, -V _{BE} = 4.0 V, T _J = 150°C)	I _{BEX}		500 300	nA μA
ON CHARACTERISTICS				
Collector-Emitter Saturation Voltage (I _C = 150 mA, I _B = 15 mA) (I _C = 500 mA, I _B = 50 mA) (I _C = 1.0 A, I _B = 100 mA)	V _{CE(sat)}		0.3 0.5 1.0	V
Base-Emitter Saturation Voltage (I _C = 150 mA, I _B = 15 mA) (I _C = 500 mA, I _B = 50 mA) (I _C = 1.0 A, I _B = 100 mA)	V _{BE(sat)}		1.0 1.2 1.3 1.8	V
DC Current Gain (I _C = 150 mA, V _{CE} = 1.0 V) (I _C = 500 mA, V _{CE} = 1.0 V) (I _C = 1.0 A, V _{CE} = 5.0 V)	h _{FE}	30 25 30 20 25	90	
SMALL SIGNAL CHARACTERISTICS				
Small Signal Current Gain (I _C = 50 mA, V _{CE} = 10 V, f = 100 MHz)	h _{fe}	2.5		
Input Capacitance (-V _{BE} = 0.5 V, I _C = 0, f = 1.0 MHz)	C _{ib}		60	pF

T-35-19


ELECTRICAL CHARACTERISTICS (continued) ($T_A = 25^\circ\text{C}$ unless otherwise noted.)

Characteristic	Symbol	Min	Max	Unit
Output Capacitance ($V_{CB} = 10\text{ V}, I_E = 0, f = 1.0\text{ MHz}$)	C_{ob}		10	pF
Turn On Time (See Figure 1) ($I_C = 500\text{ mA}, I_B = 50\text{ mA}, -V_{BE} = 2.0\text{ V}$) ($V_{CC} = 50\text{ V}$) [BSX59] ($V_{CC} = 30\text{ V}$) [BSX60]	t_{on}		35 40	ns
Turn Off Time (See Figure 1) ($I_C = 500\text{ mA}, I_{B1} = I_{B2} = 50\text{ mA}$) ($V_{CC} = 50\text{ V}$) [BSX59] ($V_{CC} = 30\text{ V}$) [BSX60]	T_{off}		60 70	ns

FIGURE 1 — SWITCHING TIME TEST CIRCUIT

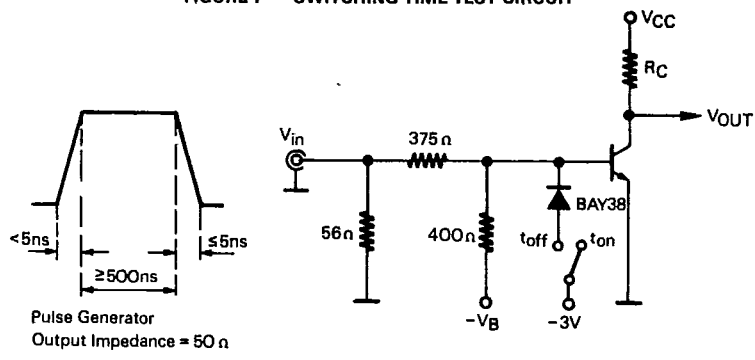

Measurement	V_{CC} R_C	BSX59 BSX61	BSX60	V Ω
		50 100	30 60	
t_{on}	$-V_B$ V_{in}	4.0 24.75		V V
t_{off}	$-V_B$ V_{in}	16.7 37.5		V V





LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.