


Silicon Schottky Diodes

BAT 14- ... 4

- Medium barrier diodes for detector and mixer applications
- Hermetical ceramic package
- For frequencies up to 40 GHz

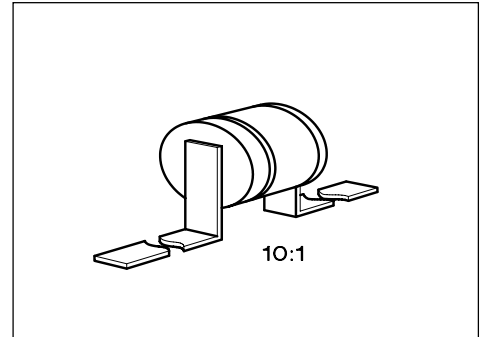

ESD: Electrostatic discharge sensitive device, observe handling precautions!

Type	Frequency band (GHz)	Ordering Code	Pin Configuration	Package ¹⁾
BAT 14-014 BAT 14-034	... 4 (S)	Q62702-D1005 Q62702-D1019		T1
BAT 14-044 BAT 14-064	... 8 (C)	Q62702-D1026 Q62702-D1036		
BAT 14-074 BAT 14-094	... 12 (X)	Q62702-D1041 Q62702-D1051		
BAT 14-104 BAT 14-114	... 18 (Ku)	Q62702-D1056 Q62702-D1061		
BAT 14-124	... 40 (Ka)	Q62702-D1066		

Maximum Ratings

Parameter	Symbol	Values	Unit
Reverse voltage	V_R	3	V
Forward current	I_F	BAT 14-014 ... BAT 14-064: 100 BAT 14-074 ... BAT 74-124: 50	mA
Junction temperature	T_j	175	°C
Storage temperature range	T_{stg}	- 65 ... + 150	
Operating temperature range	T_{op}	- 65 ... + 150	


1) For detailed information see chapter Package Outlines.

Electrical Characteristics


at $T_A = 25\text{ °C}$, unless otherwise specified.

Parameter	Symbol	Values			Unit		
		min.	typ.	max.			
Breakdown voltage $I_R = 10\text{ }\mu\text{A}$	$V_{(BR)}$	3	–	–	V		
Forward voltage $I_F = 1\text{ mA}$	V_F	BAT 14-014/-034	–	0.42	–	pF	
		BAT 14-044/-064	–	0.43	–		
		BAT 14-074/-094	–	0.44	–		
		BAT 14-104/-114	–	0.46	–		
		BAT 14-124	–	0.47	–		
$I_F = 10\text{ mA}$	BAT 14-014/-034	–	0.5	–			
	BAT 14-044/-064	–	0.53	–			
	BAT 14-074/-094	–	0.55	–			
	BAT 14-104/-114	–	0.58	–			
	BAT 14-124	–	0.63	–			
Diode capacitance $f = 1\text{ MHz}$, $V_R = 0$	C_T	BAT 14-014/-034	–	0.25	0.35		
		BAT 14-044/-064	–	0.2	0.25		
		BAT 14-074/-094	–	0.17	0.2		
		BAT 14-104/-114	–	0.13	0.15		
		BAT 14-124	–	0.1	0.12		
Case capacitance	C_C	–	0.1	–			
Noise figure (single sideband) IF amplifier noise $F_{IF} = 1.5\text{ dB}$, $P_{LO} = 3\text{ dBm}$, $f_{IF} = 10.7\text{ MHz}$	F_{SSB}	$f = 3\text{ GHz}$	BAT 14-014	–	5.5	–	dB
		BAT 14-034	–	6.5	–		
$f = 6\text{ GHz}$		BAT 14-044	–	5.5	–		
		BAT 14-064	–	6.5	–		
$f = 9.3\text{ GHz}$		BAT 14-074	–	5.5	–		
		BAT 14-094	–	6.5	–		
$f = 16\text{ GHz}$		BAT 14-104	–	6.0	–		
		BAT 14-114	–	7.0	–		
		BAT 14-124	–	9.0	–		
Differential forward resistance $I_F = 10/50\text{ mA}$	r_f	BAT 14-014	–	3	–	Ω	
		BAT 14-034	–	4	–		
		BAT 14-044	–	3.5	–		
		BAT 14-064	–	4.5	–		
		BAT 14-074	–	4.5	–		
		BAT 14-094	–	5.5	–		
		BAT 14-104	–	5.5	–		
		BAT 14-114	–	7	–		
	BAT 14-124	–	8	–			


Forward current $I_F = f(V_F)$ of BAT 14-094

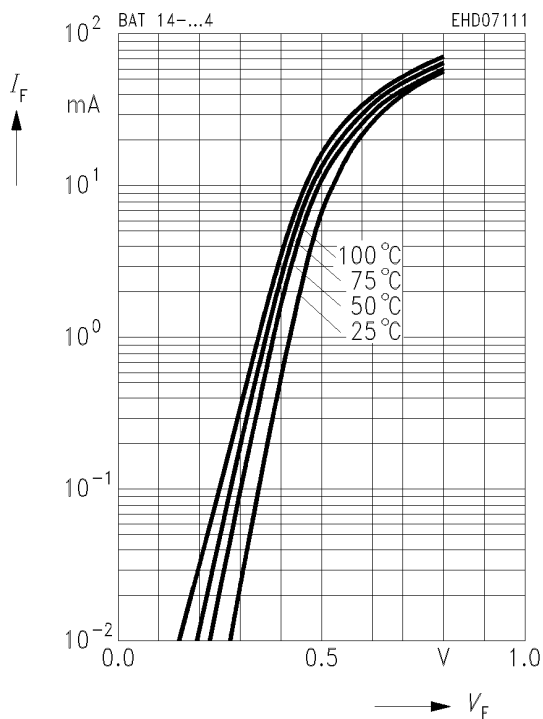

Single sideband noise $F_{SSB} = f(P_{Lo})$ $f_{Lo} = 9.375$ GHz, $f_{IF} = 10.7$ MHz at $F_{IF} = 1.5$ dB

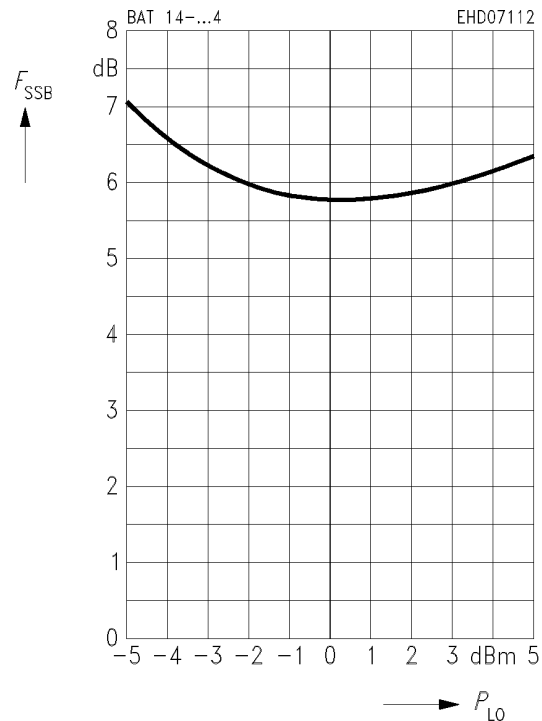

Measuring circuit for IF amplifier noise

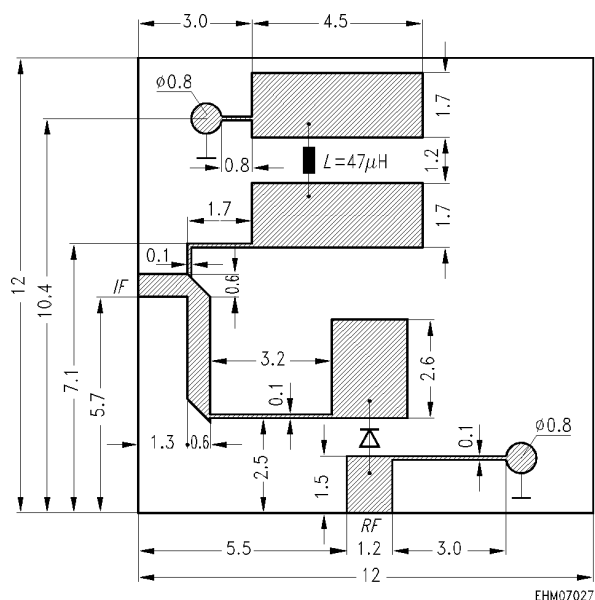

Ceramic p. c. board for noise measurement
at 9.375 GHz (material = alumina; $E_R = 9.94$; thickness
= 0.635 mm)

Dimensions in mm



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.