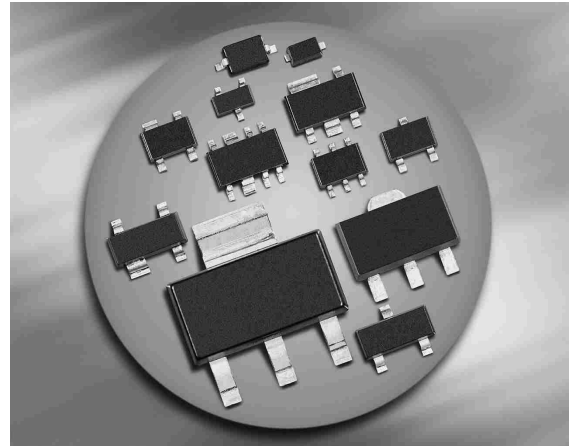










Silicon Schottky Diodes

- For mixer applications in the VHF / UHF range
- For high-speed switching applications


BAT68

BAT68-02L

**BAT68-04
BAT68-04W**

**BAT68-05
BAT68-05W**

**BAT68-06
BAT68-06W**

**BAT68-07
BAT68-07W**

BAT68-08S

BAT68-09S

ESD: Electrostatic discharge sensitive device, observe handling precaution!

Type	Package	Configuration	L_S (nH)	Marking
BAT68	SOT23	single	1.8	83s
BAT68-02L*	TSLP-2-1	single, leadless	0.4	83
BAT68-04	SOT23	series	1.8	84s
BAT68-04W	SOT323	series	1.4	84s
BAT68-05	SOT23	common cathode	1.8	85s
BAT68-05W	SOT323	common cathode	1.4	85s
BAT68-06	SOT23	common anode	1.8	86s
BAT68-06W	SOT323	common anode	1.4	86s
BAT68-07	SOT143	parallel pair	2	87s
BAT68-07W	SOT343	parallel pair	1.6	87s
BAT68-08S	SOT363	parallel triple	1.4	83s
BAT68-09S*	SOT363	parallel pair, high isolation	1.6	89s

* Preliminary Data

Maximum Ratings at $T_A = 25^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Value	Unit
Diode reverse voltage	V_R	8	V
Forward current	I_F	130	mA
Total power dissipation	P_{tot}		mW
BAT68, $T_S \leq 77^\circ\text{C}$		150	
BAT68-02L, $T_S \leq 114^\circ\text{C}$		150	
BAT68-04, BAT68-06, BAT68-07, $T_S \leq 61^\circ\text{C}$		150	
BAT68-04W/-06W/-08S/-09S, $T_S \leq 92^\circ\text{C}$		150	
BAT68-05, $T_S \leq 46^\circ\text{C}$		150	
BAT68-07W, $T_S \leq 89^\circ\text{C}$		150	
Junction temperature	T_j	150	$^\circ\text{C}$
Storage temperature	T_{stg}	-55 ... 150	

Thermal Resistance

Parameter	Symbol	Value	Unit
Junction - soldering point ¹⁾	R_{thJS}		K/W
BAT68		≤ 490	
BAT68-02L		≤ 240	
BAT68-04, BAT68-06, BAT68-07		≤ 590	
BAT68-04W-BAT68-06W, BAT68-08S		≤ 390	
BAT68-05		≤ 690	
BAT68-07W		≤ 410	
BAT68-09S		$\leq \text{tdb}$	


¹For calculation of R_{thJA} please refer to Application Note Thermal Resistance

Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
DC Characteristics					
Breakdown voltage $I_{(BR)} = 10 \mu\text{A}$	$V_{(BR)}$	8	-	-	V
Reverse current $V_R = 1 \text{ V}$ $V_R = 1 \text{ V}, T_A = 60^\circ\text{C}$	I_R	- -	- -	0.1 1.2	μA
Forward voltage $I_F = 1 \text{ mA}$ $I_F = 10 \text{ mA}$	V_F	- 340	318 390	340 500	mV
AC Characteristics					
Diode capacitance $V_R = 0, f = 1 \text{ MHz}$	C_T	-	-	1	pF
Differential forward resistance $I_F = 5 \text{ mA}, f = 10 \text{ kHz}$	R_F	-	-	10	Ω


Diode capacitance $C_T = f(V_R)$

$f = 1\text{MHz}$

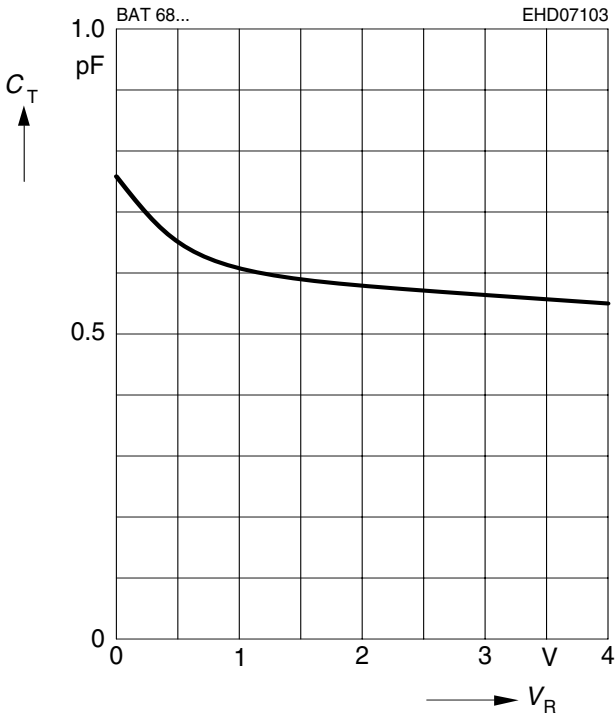


Differential forward resistance $r_f = f(I_F)$

$f = 10\text{kHz}$

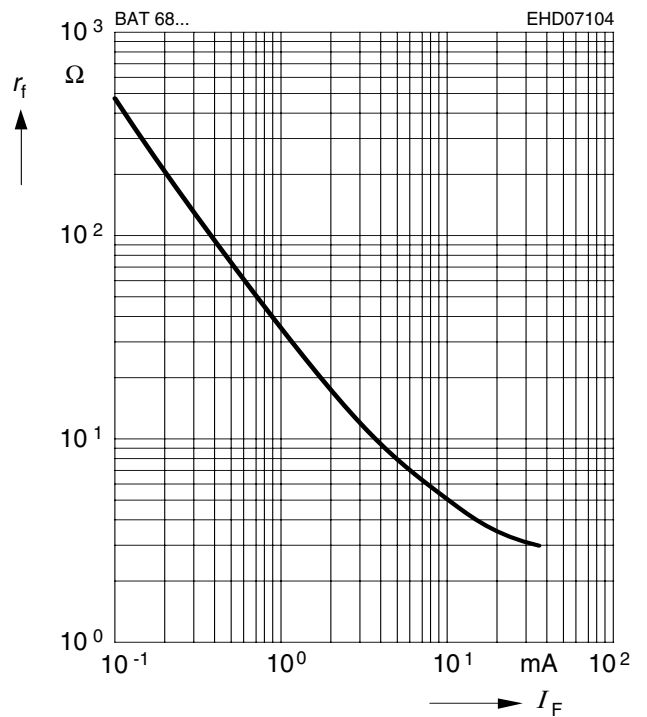


Reverse current $I_R = f(V_R)$

$T_A = \text{Parameter}$

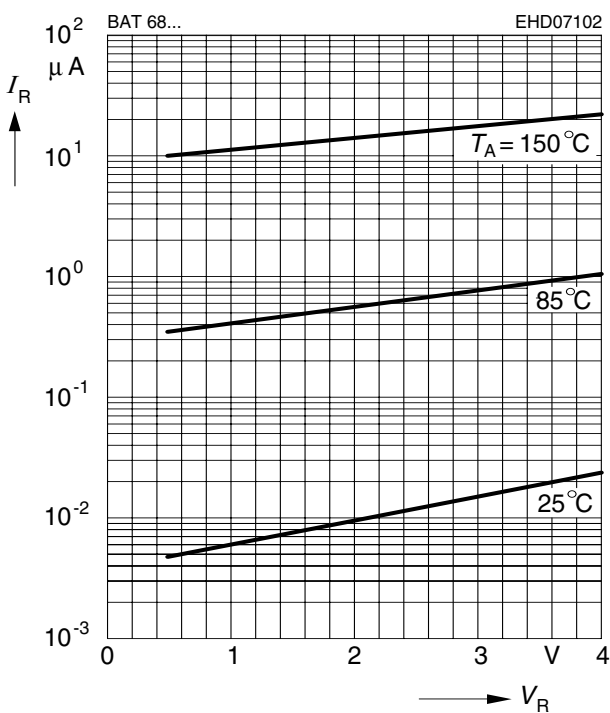


Forward current $I_F = f(V_F)$

$T_A = \text{Parameter}$

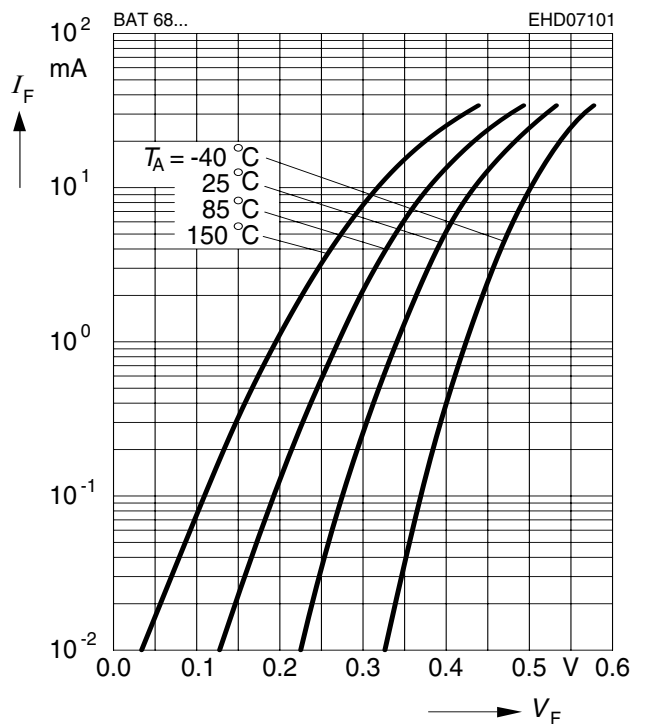


Forward current $I_F = f(T_S)$

BAT68

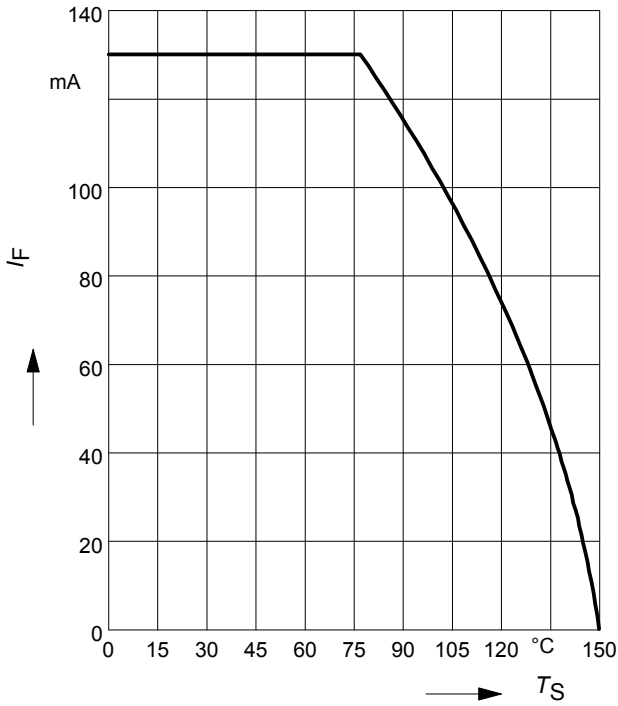


Forward current $I_F = f(T_S)$

BAT68-02L

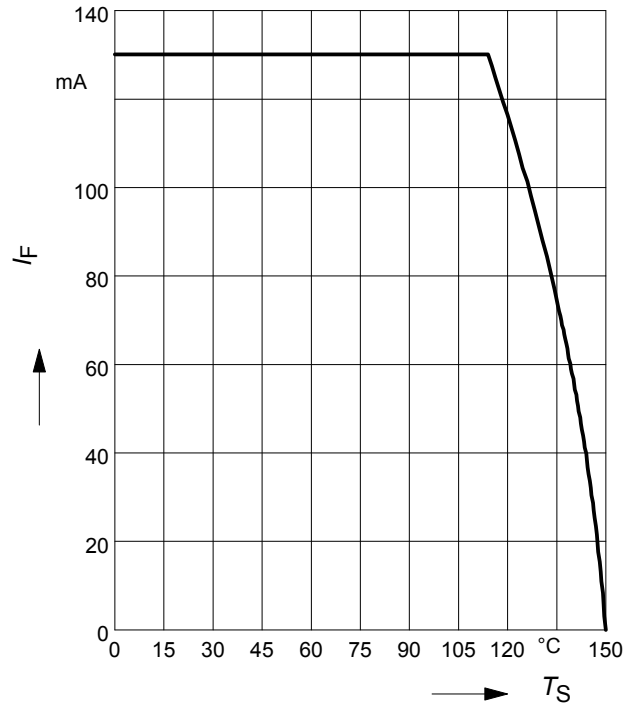

Forward current $I_F = f(T_S)$


BAT68-04, BAT68-06, BAT68-07

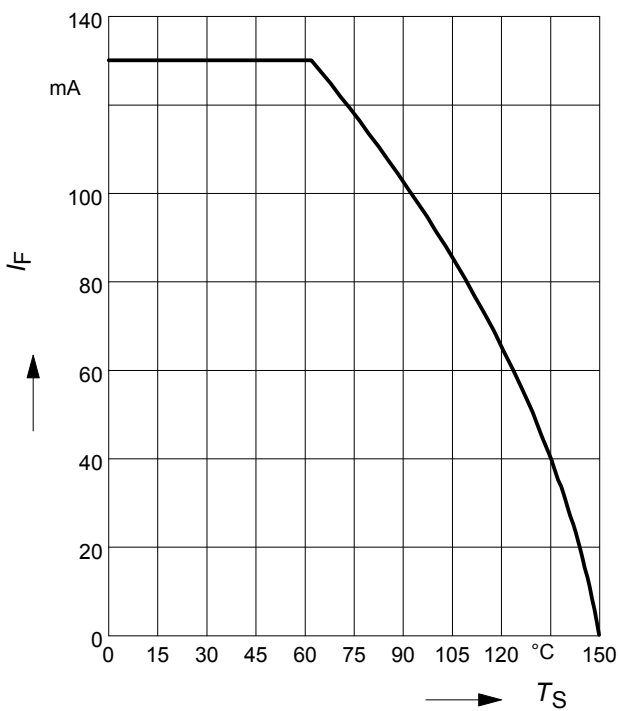

Forward current $I_F = f(T_S)$


BAT68-04W-BAT68-06W, BAT68-08S

BAT68-09S

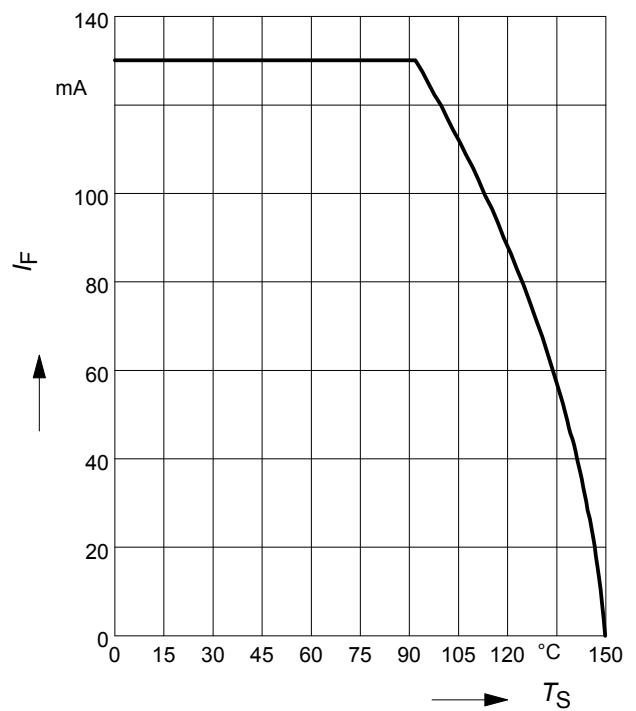


Forward current $I_F = f(T_S)$

BAT68-05

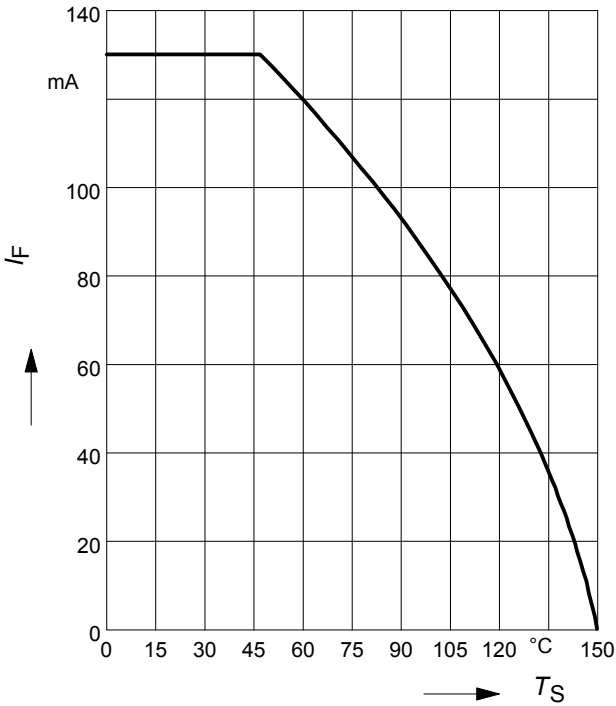


Forward current $I_F = f(T_S)$

BAT68-07W

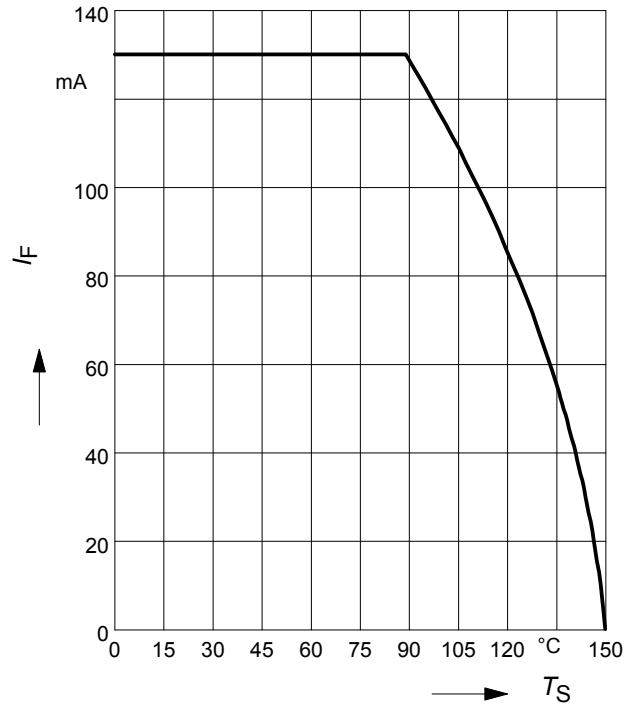

Permissible Puls Load $R_{thJS} = f(t_p)$


BAT68-02L

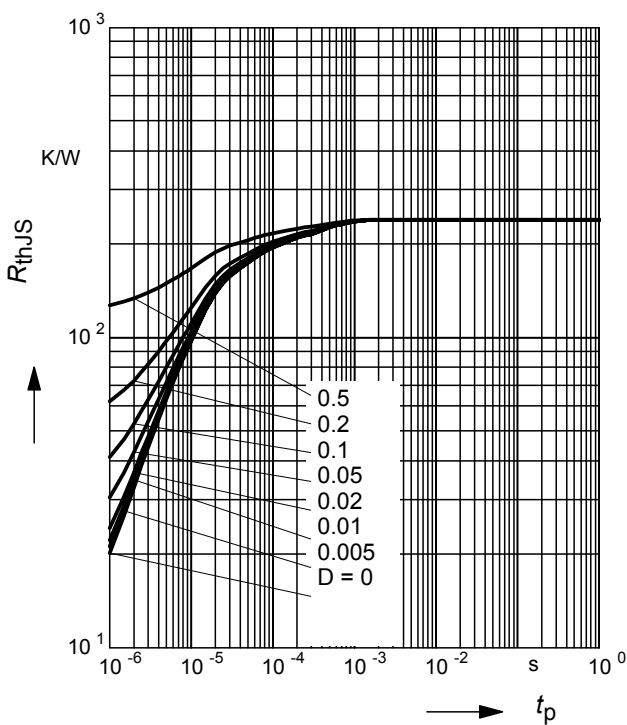

Permissible Pulse Load


$I_{Fmax} / I_{FDC} = f(t_p)$

BAT68-02L

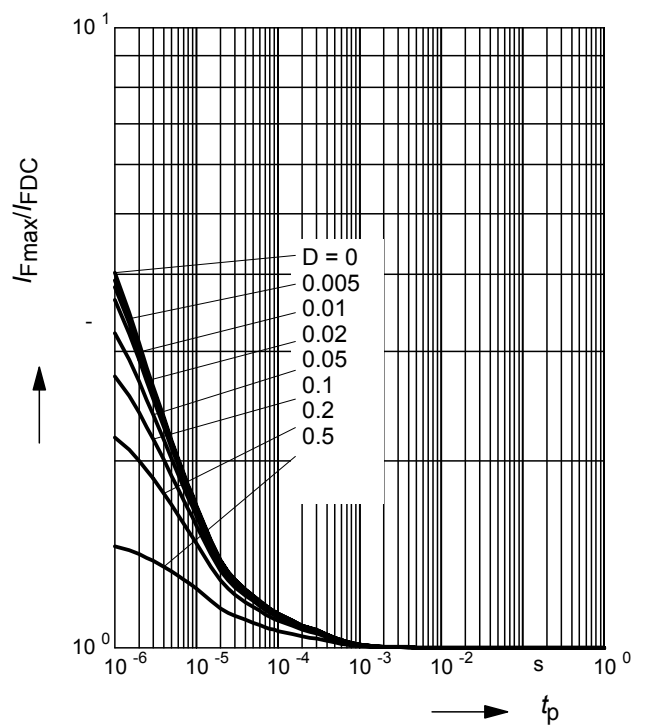

Permissible Puls Load $R_{thJS} = f(t_p)$


BAT68-04W-BAT68-06W

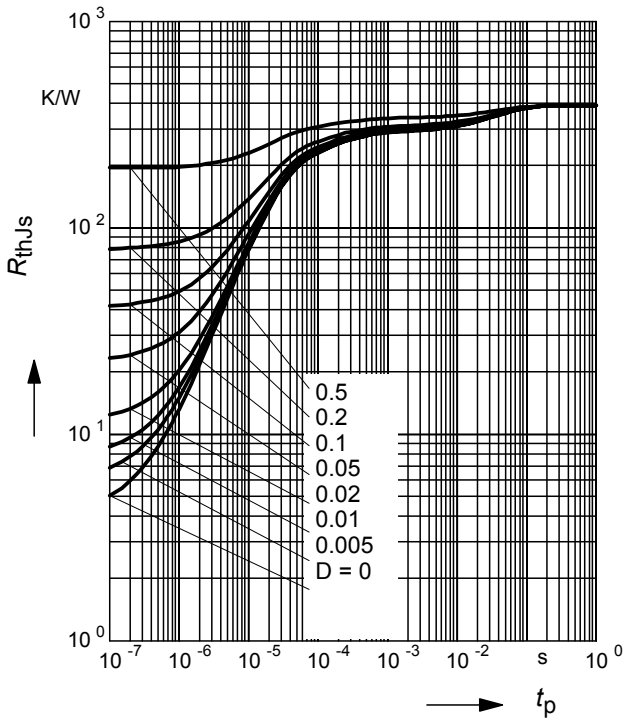

Permissible Pulse Load


$I_{Fmax} / I_{FDC} = f(t_p)$

BAT68-04W-BAT68-06W

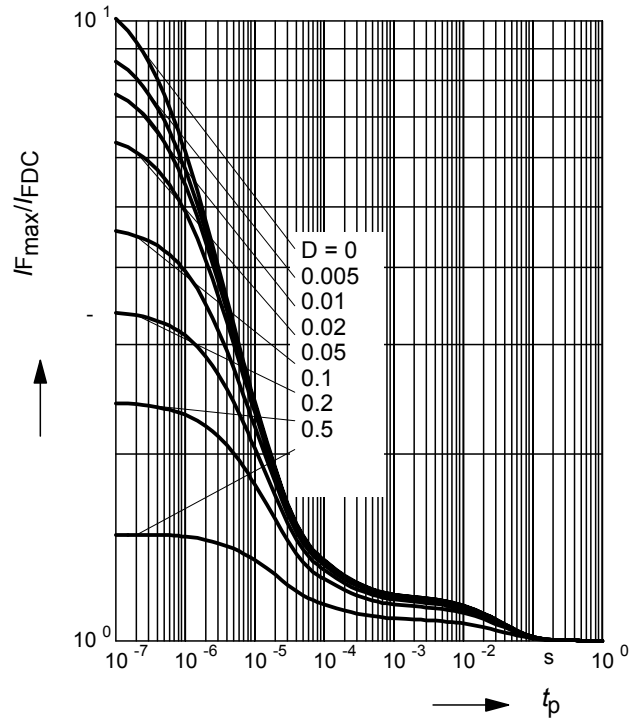

Permissible Puls Load $R_{thJS} = f(t_p)$


BAT68-07W

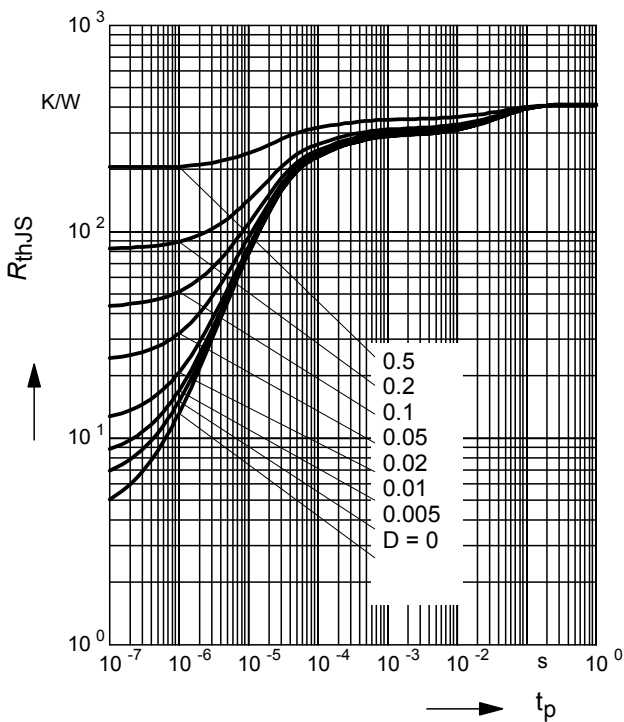

Permissible Pulse Load

$I_{Fmax} / I_{FDC} = f(t_p)$


BAT68-07W

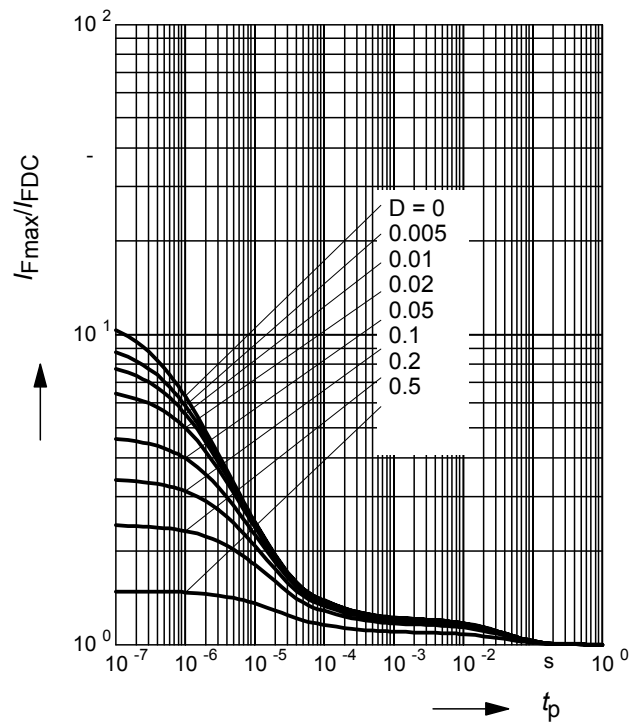


Rectifier voltage $V_{out} = f(V_{in})$

$f = 900\text{MHz}$

$R_L =$ Parameter in $k\Omega$

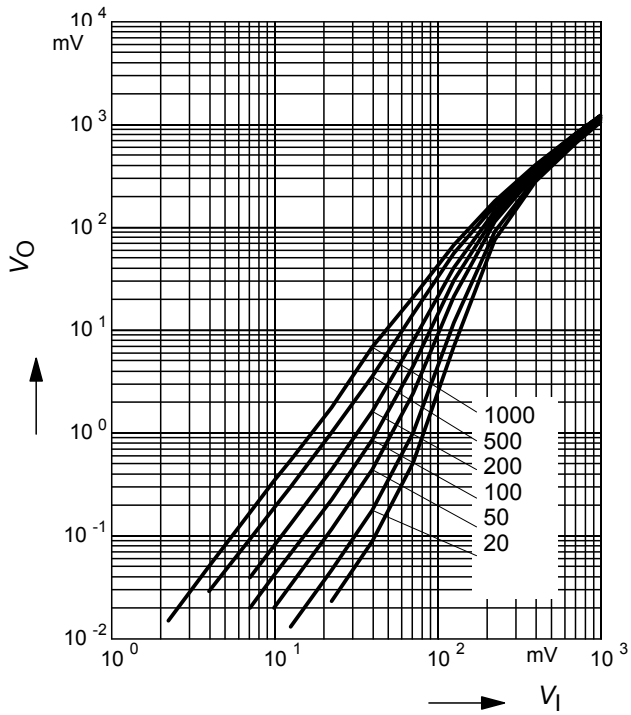

Testcircuit

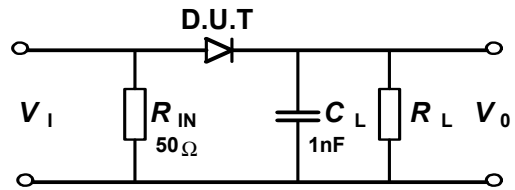



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.