

20 W AUDIO POWER AMPLIFIER

ABSOLUTE MAXIMUM RATINGS ($T_a = 25^\circ\text{C}$)

Supply Voltage (Quiescent)	V_{CC}	± 30	V
Circuit Current	$I_{CC(\text{peak})}$	5	A
Package Dissipation	P_D	30*	W
Operating Temperature	T_{opt}	-20 to $+70$	$^\circ\text{C}$
Storage Temperature	T_{stg}	-55 to $+150$	$^\circ\text{C}$
Thermal Resistance Junction to Case	$R_{\text{th(j-c)}}$	3	$^\circ\text{C/W}$

* $T_{\text{tab}} = 60^\circ\text{C}$

RECOMMENDED OPERATING CONDITIONS ($T_a = 25^\circ\text{C}$)

CHARACTERISTIC	MIN.	TYP.	MAX.	UNIT
Operating Supply Voltage	± 17	± 22	± 23	V
Input Impedance	47	56	100	$\text{k}\Omega$
Closed Loop Voltage Gain	26	40		dB
Load Impedance	4	8		Ω


ELECTRIC CHARACTERISTICS ($V_{CC} = \pm 22\text{ V}$, $A_V = 40\text{ dB}$, $R_L = 8\ \Omega$, $R_G = 600\ \Omega$, $T_a = 25^\circ\text{C}$)

CHARACTERISTIC	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITIONS
Output Offset Voltage	V_{IO}	-100	0	+100	mV	No Signal
Circuit Current	I_{CC}	30	60	120	mA	No Signal
Output Power	P_O	16	18		W	T.H.D. = 0.5 %, $f = 20\text{ Hz} - 20\text{ kHz}$
Open Loop Voltage Gain	A_{VO}	65	75		dB	$P_O = 0.3\text{ W}$, $f = 1\text{ kHz}$
Total Harmonic Distortion	T.H.D.		0.1	0.3	%	$P_O = 10\text{ W}$, $f = 20\text{ Hz} - 20\text{ kHz}$
Output Noise Voltage	NV		0.4	1.0	mV	$R_G = 2.2\text{ k}\Omega$, No Filter
Power Band Width	P.B.W.		250		kHz	$P_O = 0.3\text{ W}$, -3 dB
Supply Voltage Rejection Ratio	S.V.R.	50	56		dB	$R_G = 2.2\text{ k}\Omega$, fripple = 100 Hz

PACKAGE DIMENSION

Unit: mm


Typical value unless otherwise noted

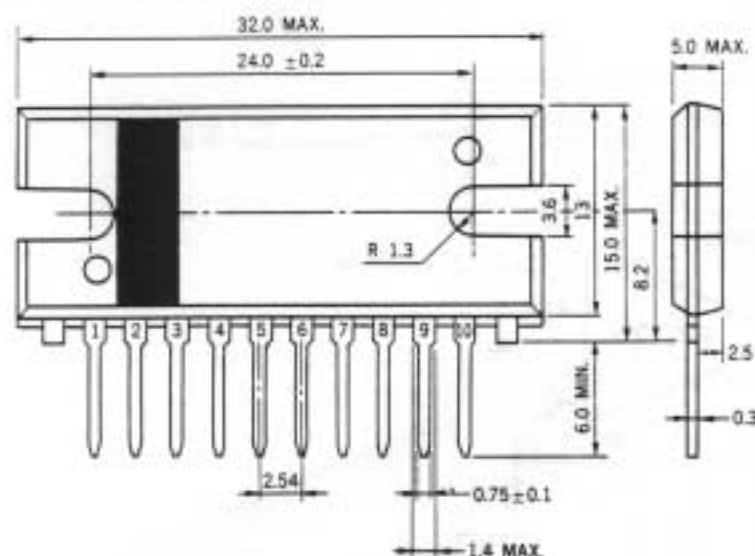

CONNECTION DIAGRAM

1	OUTPUT
2	NC
3	+V _{CC}
4	MUTING
5	PHASE COMP
6	PHASE COMP
7	INPUT
8	NFB
9	GND
10	-V _{CC}

TEST CIRCUIT

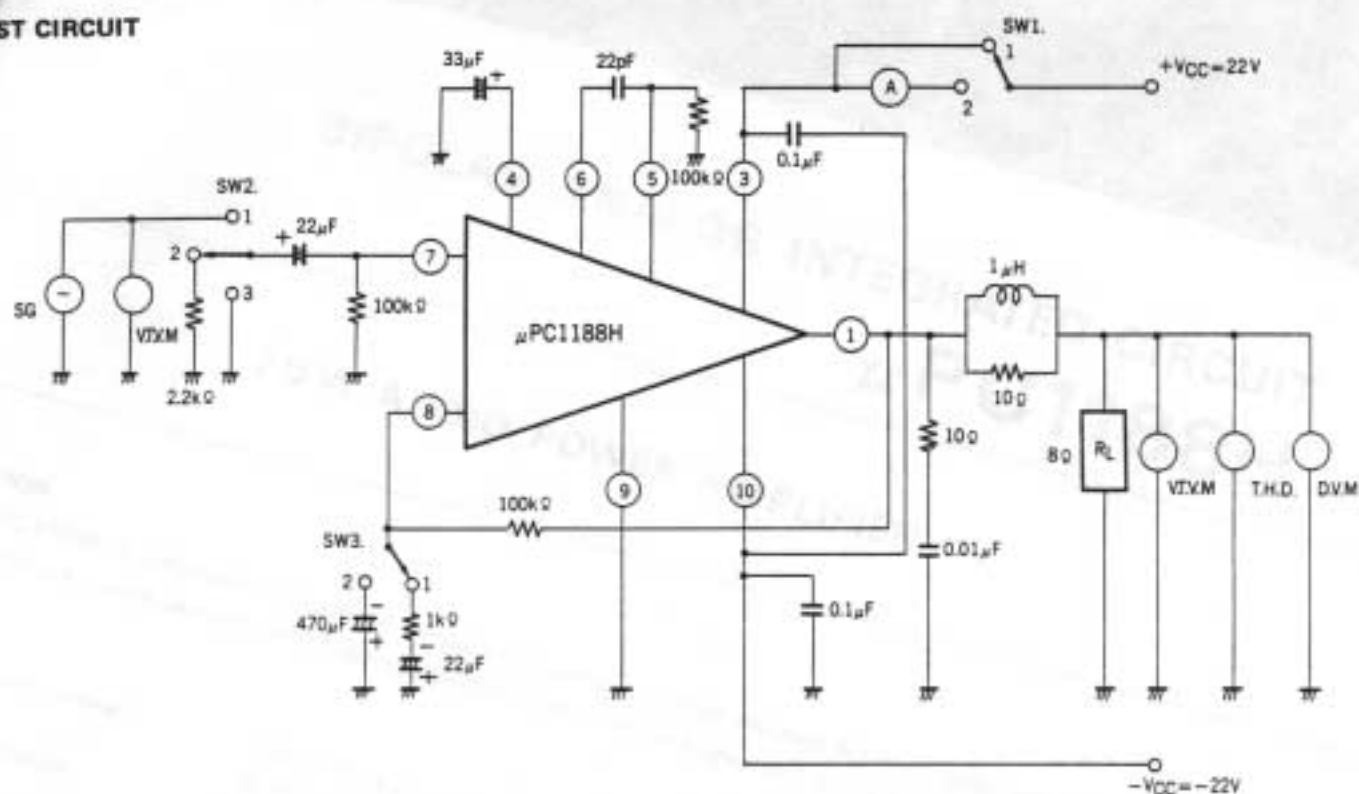

NOTE: Turn on plus and minus power supply at the same time or minus power supply at first.

ITEM	SYMBOL	SW1	SW2	SW3
Circuit Current	I_{CC}	2	3	1
Output Offset Voltage	V_{IO}	1	3	1
Output Power	P_O	1	1	1
Open Loop Voltage Gain	A_{VO}	1	1	2
Total Harmonic Distortion	T.H.D.	1	1	1
Output Noise Voltage	NV	1	2	1
Supply Voltage Rejection Ratio	SVR	1	2	1

APPLICATION CIRCUIT

