


Dual SCR POW-R-BLOK™ Modules 200 Amperes/800 Volts



Outline Drawing

| Dimension | Inches | Millimeters |
|-----------|-------------------------------|-------------|
| A | 5.906 | 150 |
| B | 2.697±0.02 | 68.5±0.2 |
| C | 1.575 | 40 |
| D | 1.535 | 39 |
| E | 1.260 | 32 |
| F | 1.181 | 30 |
| G | 0.906 | 23 |
| H | 0.787 | 20 |
| J | 0.630 | 16 |
| K | 0.276 | 7 |
| L | 0.256±0.008 Dia. Dia. 6.5±0.2 | |
| M | 0.236 | 6 |
| N | 0.197 | 5 |
| P | M8 Metric | M8 |

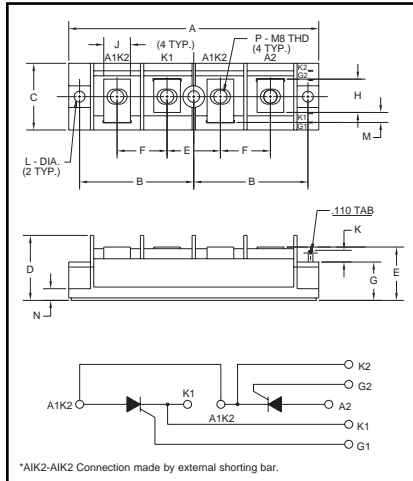

CM530820
Dual SCR POW-R-BLOK™ Modules
200 Amperes/800 Volts

Description:

Powerex Dual SCR POW-R-BLOK™ Modules are designed for use in applications requiring phase control and isolated packaging. The modules are isolated for easy mounting with other components on common heatsinks.

Features:

- Isolated Mounting
- Glass Passivated Chips
- Metal Baseplate
- Low Thermal Impedance

Applications:

- Battery Supplies
- Bridge Circuits
- AC and DC Motor Control
- Tap Changers
- Lighting Control

Ordering Information:

Select the complete eight digit module part number you desire from the table below.
Example: CM530820 is a 800 Volt, 200 Ampere Dual SCR POW-R-BLOK™ Module.

| Type | Voltage Volts (x100) | Current Rating Amperes (x10) |
|------|-------------------------|---------------------------------|
| CM53 | 08 | 20 |



Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

CM530820

Dual SCR POW-R-BLOK™ Modules

200 Amperes/800 Volts

Absolute Maximum Ratings

| Characteristics | Symbol | CM530820 | Units |
|---|-------------|------------|------------------|
| Peak Forward Blocking Voltage | V_{DRM} | 800 | Volts |
| Transient Peak Forward Blocking Voltage (Non-Repetitive), $t < 5ms$ | V_{DSM} | 960 | Volts |
| DC Forward Blocking Voltage | $V_{D(DC)}$ | 640 | Volts |
| Peak Reverse Blocking Voltage | V_{RRM} | 800 | Volts |
| Transient Peak Reverse Blocking Voltage (Non-Repetitive), $t < 5ms$ | V_{RSM} | 960 | Volts |
| DC Reverse Blocking Voltage | $V_{R(DC)}$ | 640 | Volts |
| RMS On-State Current | $I_T(RMS)$ | 310 | Amperes |
| Average On-State Current, $T_C = 65^\circ C$ | $I_T(AV)$ | 200 | Amperes |
| Peak One-Cycle Surge (Non-Repetitive) On-State Current (60Hz) | I_{TSM} | 4000 | Amperes |
| Peak One-Cycle Surge (Non-Repetitive) On-State Current (50Hz) | I_{TSM} | 3600 | Amperes |
| I^2t (for Fusing), 8.3 milliseconds | I^2t | 67000 | A^2sec |
| Critical Rate-of-Rise of On-State Current* | di/dt | 100 | Amperes/ μs |
| Peak Gate Power Dissipation | P_{GM} | 10 | Watts |
| Average Gate Power Dissipation | $P_{G(AV)}$ | 3.0 | Watts |
| Peak Forward Gate Voltage | V_{GFM} | 10 | Volts |
| Peak Reverse Gate Voltage | V_{GRM} | 5.0 | Volts |
| Peak Forward Gate Current | I_{GFM} | 4.0 | Amperes |
| Storage Temperature | T_{STG} | -40 to 125 | $^\circ C$ |
| Operating Temperature | T_j | -40 to 125 | $^\circ C$ |
| Maximum Mounting Torque M6 Mounting Screw | — | 26 | in.-lb. |
| Maximum Mounting Torque M8 Terminal Screw | — | 72 | in.-lb. |
| Module Weight (Typical) | — | 300 | Grams |
| V Isolation | V_{RMS} | 2000 | Volts |









* $T_j = 125^\circ C$, $I_G = 1.0A$, $V_D = 1/2 V_{DRM}$

CM530820
Dual SCR POW-R-BLOK™ Modules
 200 Amperes/800 Volts

Electrical and Thermal Characteristics, $T_j = 25^\circ\text{C}$ unless otherwise specified

| Characteristics | Symbol | Test Conditions | CM530820 | Units |
|---|--------------------------|---|----------|-----------------------|
| Blocking State Maximums | | | | |
| Forward Leakage Current, Peak | I_{DRM} | $T_j = 125^\circ\text{C}$, $V_{\text{DRM}} = \text{Rated}$ | 30 | mA |
| Reverse Leakage Current, Peak | I_{RRM} | $T_j = 125^\circ\text{C}$, $V_{\text{RRM}} = \text{Rated}$ | 30 | mA |
| Conducting State Maximums | | | | |
| Peak On-State Voltage | V_{TM} | $I_{\text{TM}} = 600\text{A}$ | 1.3 | Volts |
| Switching Minimums | | | | |
| Critical Rate-of-Rise of Off-State Voltage | dv/dt | $T_j = 125^\circ\text{C}$, $V_{\text{D}} = 2/3 V_{\text{DRM}}$ | 500 | Volts/ μs |
| Thermal Maximums | | | | |
| Thermal Resistance, Junction-to-Case | $R_{\theta(\text{J-C})}$ | Per Module | 0.2 | $^\circ\text{C/Watt}$ |
| Thermal Resistance, Case-to-Sink (Lubricated) | $R_{\theta(\text{C-S})}$ | Per Module | 0.05 | $^\circ\text{C/Watt}$ |
| Gate Parameters Maximums | | | | |
| Gate Current-to-Trigger | I_{GT} | $V_{\text{D}} = 6\text{V}$, $R_{\text{L}} = 2\Omega$ | 100 | mA |
| Gate Voltage-to-Trigger | V_{GT} | $V_{\text{D}} = 6\text{V}$, $R_{\text{L}} = 2\Omega$ | 3.0 | Volts |
| Non-Trigginger Gate Voltage | V_{GDM} | $T_j = 125^\circ\text{C}$, $V_{\text{D}} = 1/2 V_{\text{DRM}}$ | 0.25 | Volts |

CM530820
Dual SCR POW-R-BLOK™ Modules
 200 Amperes/800 Volts

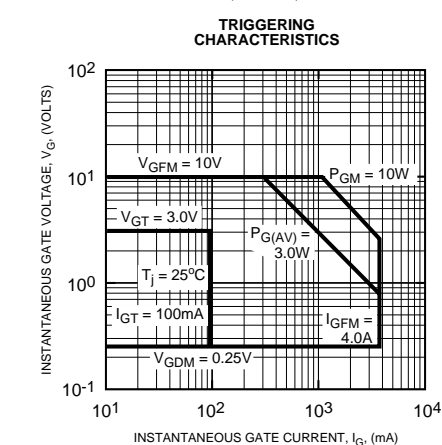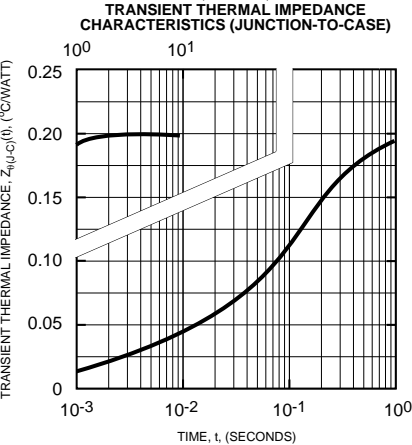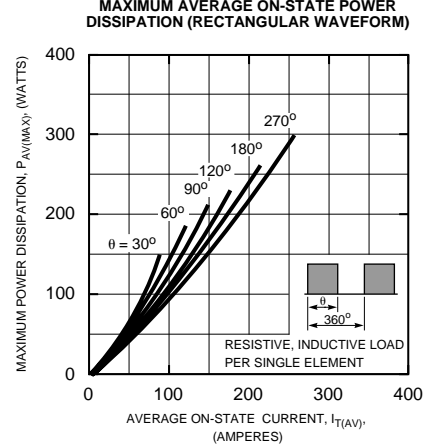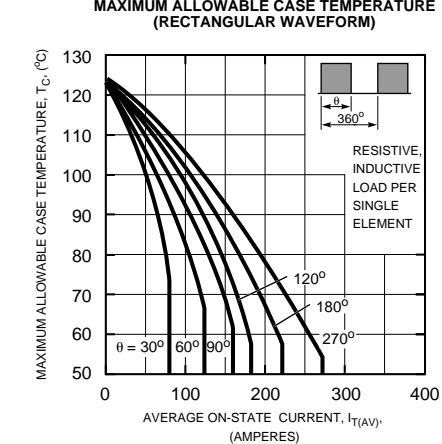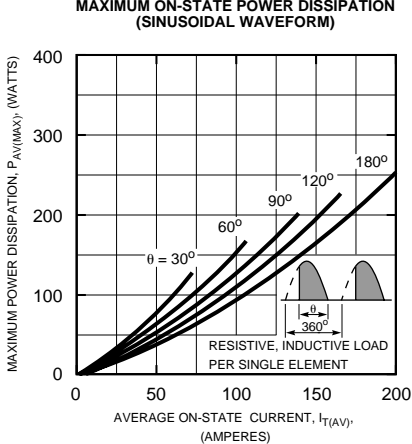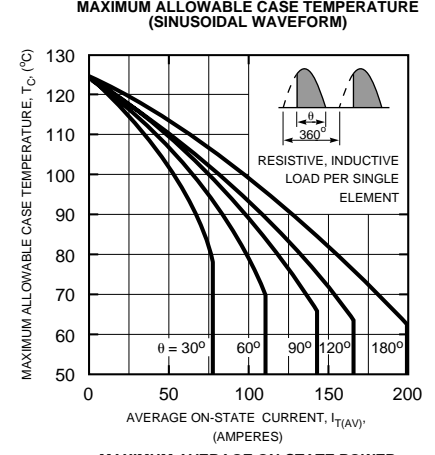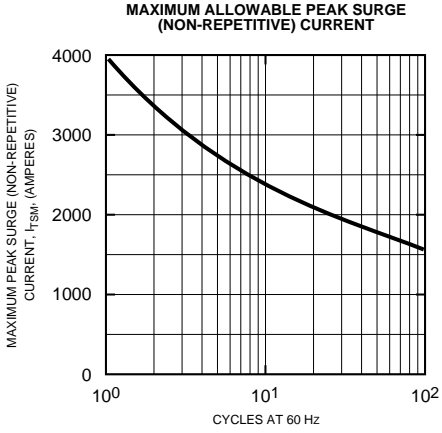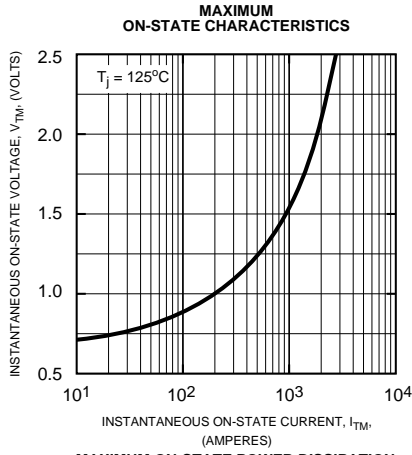



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.