

# International IR Rectifier

## 20CTQ150 20CTQ150S 20CTQ150-1

### SCHOTTKY RECTIFIER

20 Amp


#### Major Ratings and Characteristics

| Characteristics                                     | Values     | Units            |
|---|------------|------------------|
| $I_{F(AV)}$ Rectangular waveform                    | 20         | A                |
| $V_{RRM}$   | 150        | V                |
| $I_{FSM}$ @ tp = 5 $\mu$ s sine                     | 1030       | A                |
| $V_F$ @ 10 Apk, $T_J = 125^\circ\text{C}$ (per leg) | 0.66       | V                |
| $T_J$ range   | -55 to 175 | $^\circ\text{C}$ |

#### Description/Features

This center tap Schottky ectifier has been optimized for low reverse leakage at high temperature. The proprietary barrier technology allows for reliable operation up to 175° C junction temperature. Typical applications are in switching power supplies, converters, free-wheeling diodes, and reverse battery protection.

- 175° C  $T_J$  operation
- Center tap configuration
- Low forward voltage drop
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability

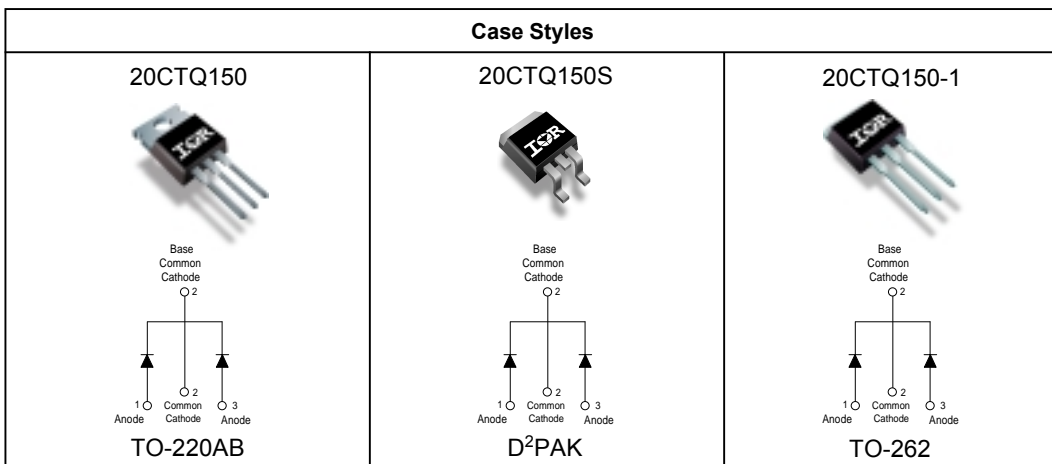

## Voltage Ratings

| Parameters                                      | 20CTQ150<br>20CTQ150S<br>20CTQ150-1 |
|---|-------------------------------------|
| $V_R$ Max. DC Reverse Voltage (V)               | 150                                 |
| $V_{RWM}$ Max. Working Peak Reverse Voltage (V) |                                     |

## Absolute Maximum Ratings

| Parameters  | Values | Units | Conditions   |
|---|--------|-------|--|
| $I_{F(AV)}$ Max. Average Forward Current (Per Leg) * See Fig. 5 (Per Device)      | 10     | A     | 50% duty cycle @ $T_C = 154^\circ\text{C}$ , rectangular wave form   |
|   | 20     |       |  |
| $I_{FSM}$ Max. Peak One Cycle Non-Repetitive Surge Current (Per Leg) * See Fig. 7 | 1030   | A     | 5 $\mu\text{s}$ Sine or 3 $\mu\text{s}$ Rect. pulse  |
|   | 180    |       | 10ms Sine or 6ms Rect. pulse   |
| $E_{AS}$ Non-Repetitive Avalanche Energy (Per Leg)                                | 2.45   | mJ    | $T_J = 25^\circ\text{C}$ , $I_{AS} = 0.7$ Amps, $L = 10$ mH  |
| $I_{AR}$ Repetitive Avalanche Current (Per Leg)                                   | 0.7    | A     | Current decaying linearly to zero in 1 $\mu\text{sec}$<br>Frequency limited by $T_J$ max. $V_A = 1.5 \times V_R$ typical |

## Electrical Specifications

| Parameters   | Typ. | Max.  | Units            | Conditions   |
|--|------|-------|------------------|--|
| $V_{FM}$ Max. Forward Voltage Drop (Per Leg) * See Fig. 1    | 0.80 | 0.83  | V                | @ 10A  |
|  | 0.90 | 0.96  | V                | @ 20A  |
|  | 0.63 | 0.66  | V                | @ 10A  |
|  | 0.73 | 0.77  | V                | @ 20A  |
| $I_{RM}$ Max. Reverse Leakage Current (Per Leg) * See Fig. 2 | 3.0  | 25    | $\mu\text{A}$    | $T_J = 25^\circ\text{C}$   |
|  | 2.7  | 5.0   | mA               | $T_J = 125^\circ\text{C}$  |
| $C_T$ Typical Junction Capacitance (Per Leg)                 | -    | 280   | pF               | $V_R = 5V_{DC}$ (test signal range 100kHz to 1Mhz)<br>@ $25^\circ\text{C}$ |
| $L_S$ Typical Series Inductance (Per Leg)                    | -    | 8.0   | nH               | Measured lead to lead 5mm from package body                                |
| dv/dt Max. Voltage Rate of Change                            | -    | 10000 | V/ $\mu\text{s}$ | (Rated $V_R$ )   |

(1) Pulse Width < 300 $\mu\text{s}$ , Duty Cycle < 2%

## Thermal-Mechanical Specifications

| Parameters  | Values     | Units                     | Conditions   |
|---|------------|---------------------------|--|
| $T_J$ Max. Junction Temperature Range                             | -55 to 175 | $^\circ\text{C}$          |  |
| $T_{stg}$ Max. Storage Temperature Range                          | -55 to 175 | $^\circ\text{C}$          |  |
| $R_{thJC}$ Max. Thermal Resistance Junction to Case (Per Leg)     | 2.0        | $^\circ\text{C}/\text{W}$ | DC operation   |
| $R_{thJC}$ Max. Thermal Resistance Junction to Case (Per Package) | 1.0        | $^\circ\text{C}/\text{W}$ | DC operation   |
| $R_{thCS}$ Typical Thermal Resistance, Case to Heatsink           | 0.50       | $^\circ\text{C}/\text{W}$ | Mounting surface, smooth and greased (only for TO-220) |
| wt Approximate Weight   | 2 (0.07)   | g (oz.)                   |  |
| T Mounting Torque   | Min.       | 6 (5)                     | Kg-cm (lbf-in)   |
|   | Max.       | 12 (10)                   |  |

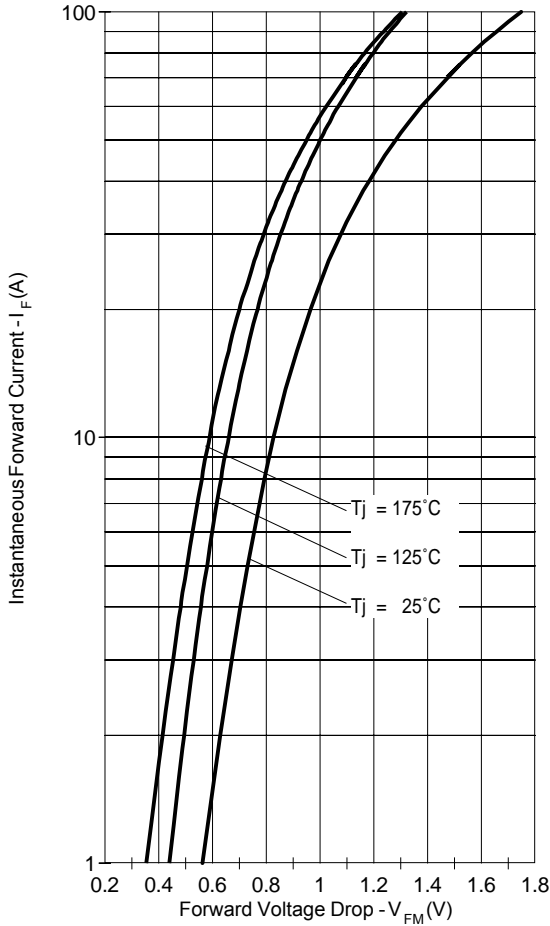


Fig. 1 - Max. Forward Voltage Drop Characteristics (Per Leg)

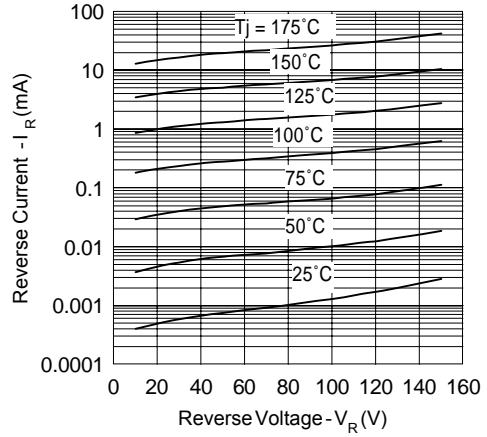


Fig. 2 - Typical Values Of Reverse Current Vs. Reverse Voltage (Per Leg)

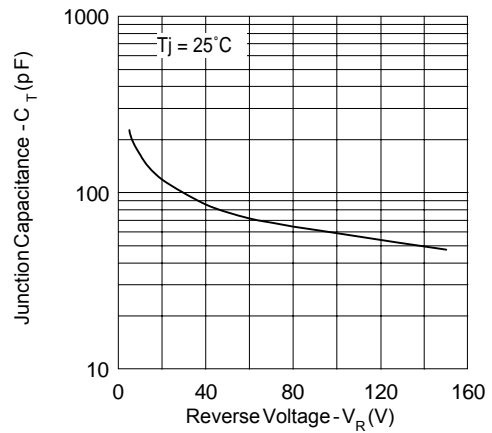


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage (Per Leg)

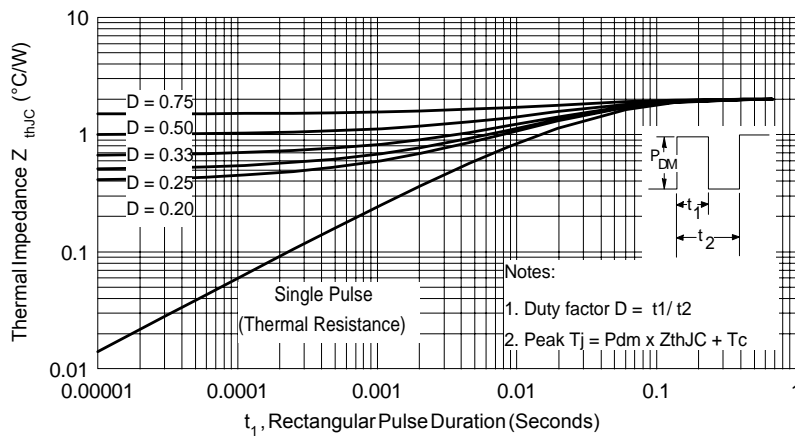


Fig. 4 - Max. Thermal Impedance  $Z_{thJC}$  Characteristics (Per Leg)

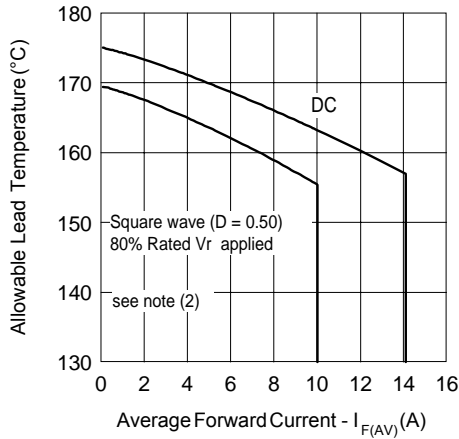


Fig. 5- Maximum Average Forward Current Vs. Allowable Lead Temperature

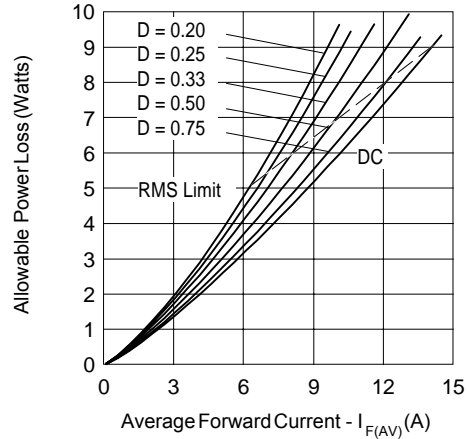


Fig. 6- Maximum Average Forward Dissipation Vs. Average Forward Current

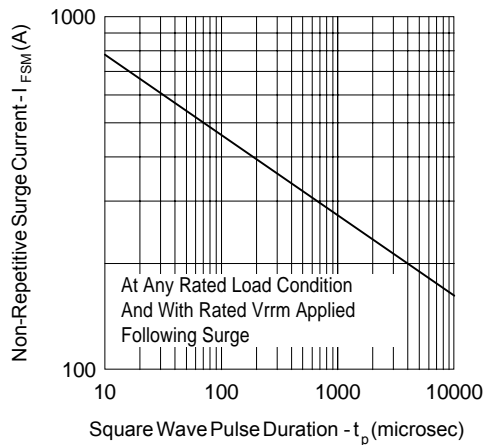


Fig. 7- Maximum Peak Surge Forward Current Vs. Pulse Duration



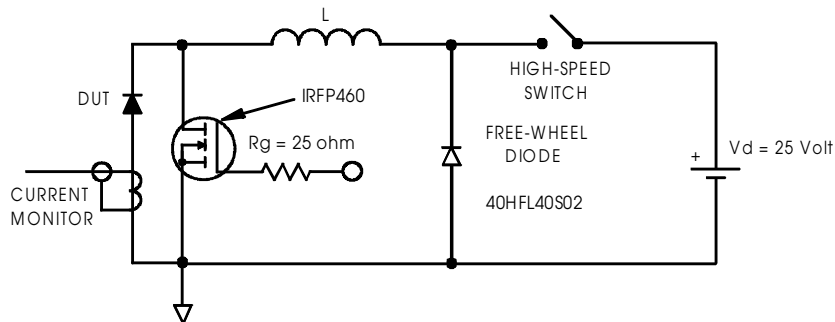


Fig. 8- Unclamped Inductive Test Circuit


- (2) Formula used:  $T_C = T_J - (Pd + Pd_{REV}) \times R_{thJC}$ ;  
 $Pd = \text{Forward Power Loss} = I_{F(AV)} \times V_{FM} @ (I_{F(AV)} / D)$  (see Fig. 6);  
 $Pd_{REV} = \text{Inverse Power Loss} = V_{R1} \times I_R (1 - D)$ ;  $I_R @ V_{R1} = 80\% \text{ rated } V_R$

Outline Table

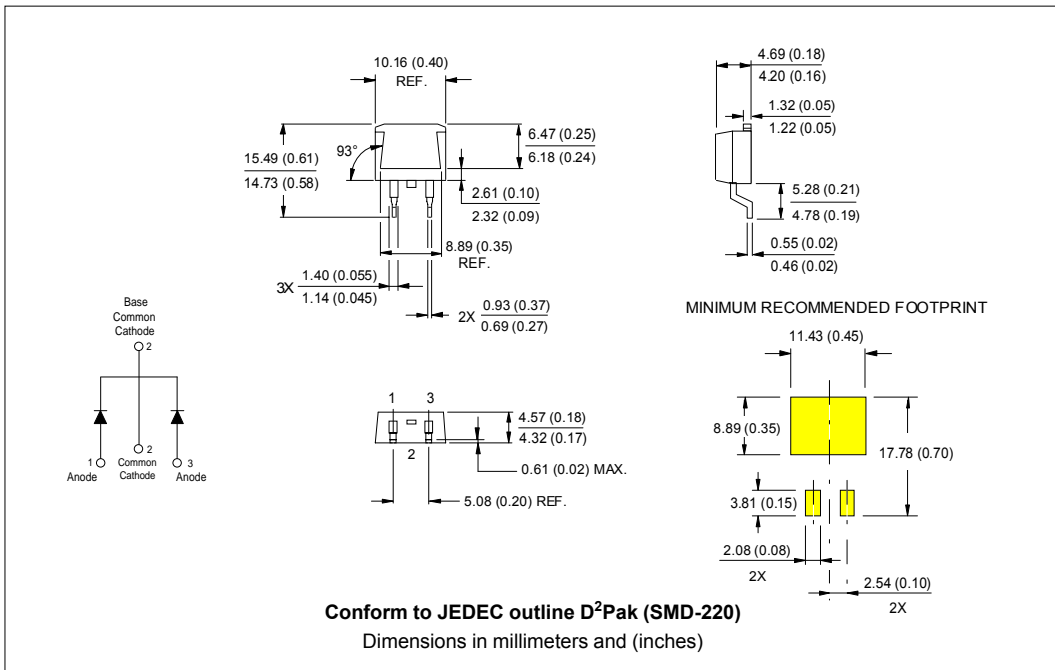

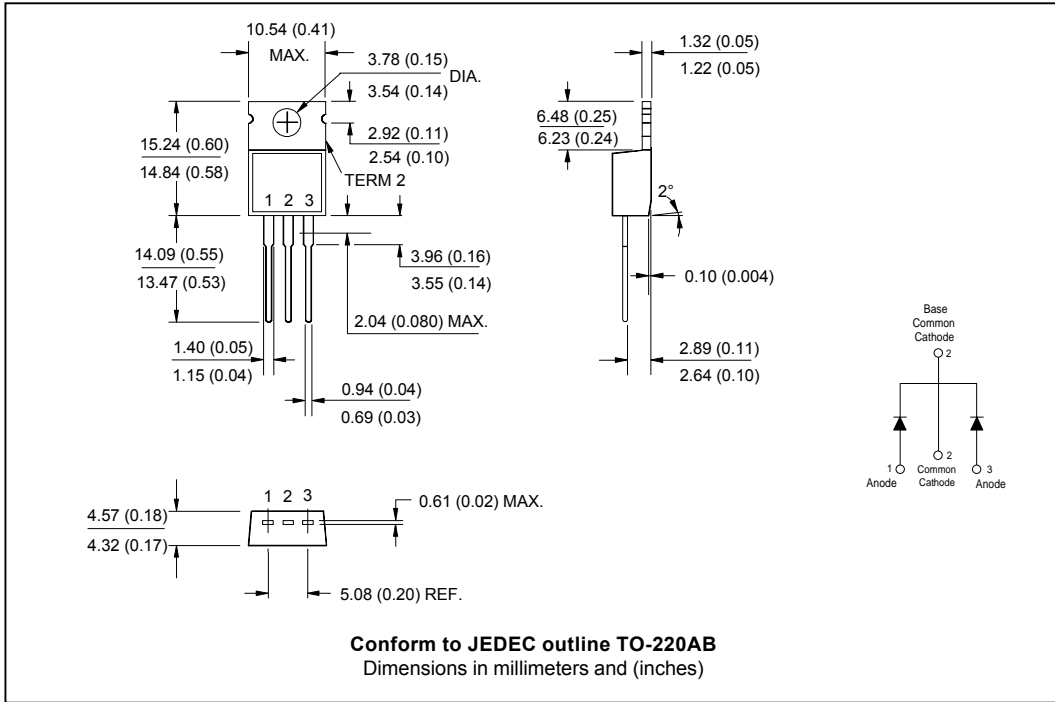

Tape & Reel Information

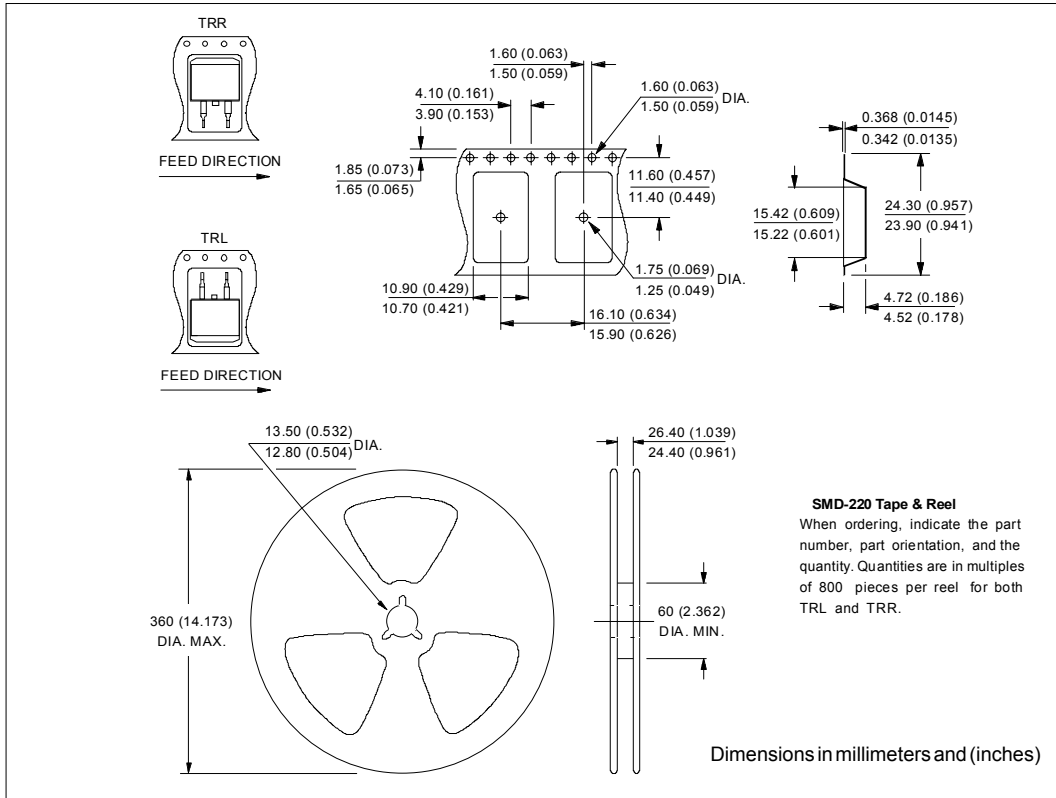

Ordering Information Table

| Device Code |  |   |   |     |    |
|-------------|--|---|---|-----|----|
| 20          | C                                      | T | Q | 150 | -1 |
| ①           | ②                                      | ③ | ④ | ⑤   | ⑥  |
| 1           | - Essential Part Number                |   |   |     |    |
| 2           | - C = Common Cathode                   |   |   |     |    |
| 3           | - T = TO-220                           |   |   |     |    |
| 4           | - Q = Schottky Q Series                |   |   |     |    |
| 5           | - Voltage Rating 150 = 150V            |   |   |     |    |
| 6           | - 1 = TO-262<br>S = D <sup>2</sup> Pak |   |   |     |    |

Data and specifications subject to change without notice.  
This product has been designed for Industrial Level.  
Qualification Standards can be found on IR's Web site.

International  
**IR** Rectifier

**IR WORLD HEADQUARTERS:** 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105  
TAC Fax: (310) 252-7309  
Visit us at [www.irf.com](http://www.irf.com) for sales contact information. 03/02



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.