



HM9202/3/4

DTMF Receiver


Features

- Built-in dial tone rejection.
- Single 5-volt supply.
- Three-state outputs.
- Narrow 14 or 18 pin package.
- No external filters required.
- Minimum system overhead.
- Simple bus interface.
- Minimum board space.

Applications

- Telephone answer machine.
- PABXs.
- Central office.
- Key systems
- Remote control
- Remote data entry

Pin Assignment

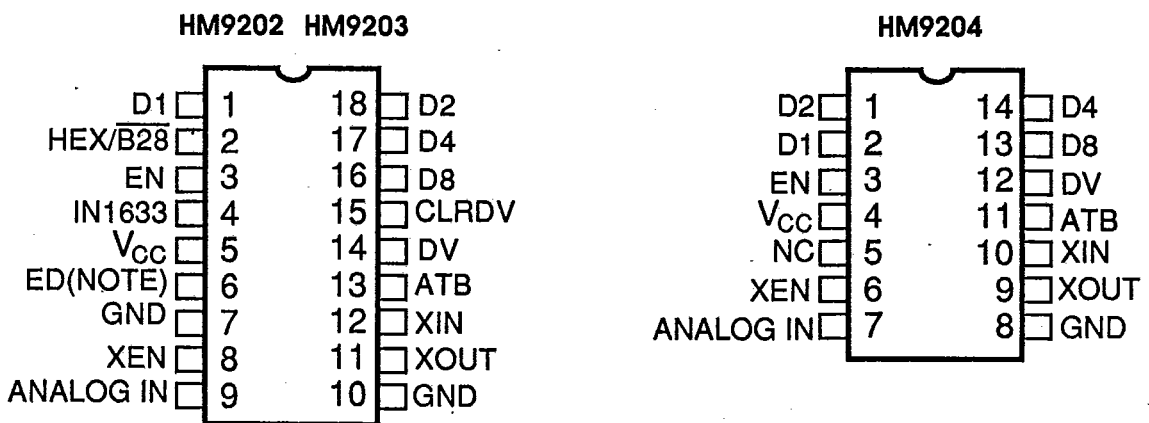

NOTE: HM9203 ONLY, WHILE 9202 IT IS "NC"

OUTPUT CODE TABLE

Digit	Hexadecimal				Binary Coded 2 of 8			
	D8	D4	D2	D1	D8	D4	D2	D1
1	0	0	0	1	0	0	0	0
2	0	0	1	0	0	0	0	1
3	0	0	1	1	0	0	1	0
4	0	1	0	0	0	1	0	0
5	0	1	0	1	0	1	0	1
6	0	1	1	0	0	1	1	0
7	0	1	1	1	1	0	0	0
8	1	0	0	0	1	0	0	1
9	1	0	0	1	1	0	1	0
0	1	0	1	0	1	1	0	1
*	1	0	1	1	1	1	0	0
#	1	1	0	0	1	1	1	0
A	1	1	0	1	0	0	1	1
B	1	1	1	0	0	1	1	1
C	1	1	1	1	1	0	1	1
D	0	0	0	0	1	1	1	1

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.