

Hysteretic Current-Mode Controller

Description

The CS-322/4 is designed for operating switching voltage regulators using hysteretic current-mode control. The difference between the CS-322 and the CS-324 is in the Start/Stop Voltages. The CS-322 is intended for off-line applications while the CS-324 is intended for battery input or DC to DC converters.


This IC allows the user to select the current hysteresis level required

with a minimum of 10% of full load. A differential current sense amplifier (CSA) permits accurate inductor current measurements. The error amplifier (EA) has its non-inverting input connected to the IC's internal reference voltage. Trimming of the bandgap reference is done at the inverting input of the Error Amplifier to achieve a $\pm 1\%$ tolerance. The output stage provides 1A peak current capability.

Absolute Maximum Ratings

Supply voltage	20V
Output current	$\pm 1A$ (peak)
.....	$\pm 200mA$ (steady state)
Operating Temperature	
Industrial	-25° to $+85^{\circ}C$
Commercial	0° to $70^{\circ}C$

Block Diagram

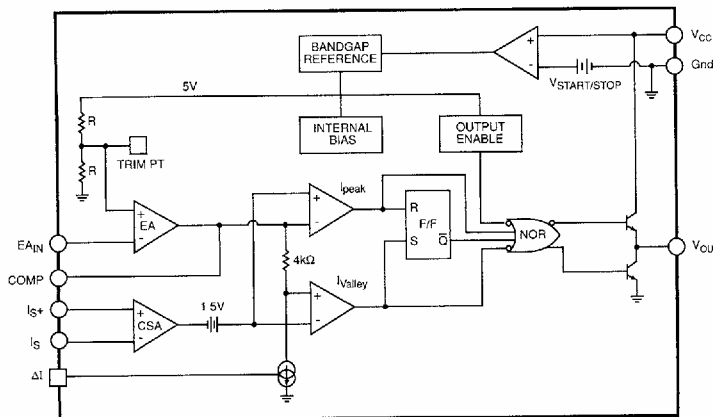


Features

- Provides Hysteretic Current-Mode Control.
- Inherent Short Circuit Protection for the Power Supply.
- High Current Totem Pole Output.
- Eliminates Right-Half Plane Zero in Continuous Conduction Flyback and Boost Converter topologies.
- Feedforward Load Regulation

Package Options

8 Lead PDIP & SO



Electrical Characteristics: $-25 \leq T_A \leq 85^\circ\text{C}$ for the CS322/4 I, $0 \leq T_A \leq 70^\circ\text{C}$ for the CS322/4 C. $V_{CC}=20\text{V}$,
Voltage on ΔI pin = 0.5V, Unless otherwise stated.

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNITS
■ Output Section					
Output Low Level	$I_{SINK}=20\text{mA}$ $I_{SINK}=200\text{mA}$		0.25 1.5	0.40 2.2	V
Output High Level	$I_{SINK}=20\text{mA}$ $I_{SINK}=200\text{mA}$	18.0 17.5	18.5 18.0		V
Rise Time	$T_J=25^\circ\text{C}$, $C=1\text{nF}$ (Note 1)		30	60	ns
Fall Time	$T_J=25^\circ\text{C}$, $C=1\text{nF}$ (Note 1)		30	60	ns
Output Resistance	$7\text{V} < V_{CC} < V_{ULVO}$ (Stop Threshold)		50	65	k Ω
■ Undervoltage Lockout Section					
Start-Up Current			0.8	1.5	mA
Operating Supply Current			14	20	mA
Start Threshold					
CS-322		13.5	14.5	15.5	V
CS-324		8.5	9.0	9.5	V
Stop Threshold					
CS-322		9.5	10.5	11.5	V
CS-324		7.4	7.8	8.2	V
■ Error Amplifier Section					
Input Bias Current	$E_{AIN} = 2.5\text{V}$		-0.3	-1.0	μA
A_{vol}	$1 < V_{COMP} < 3.5\text{V}$	65	90		dB
Unity Gain Bandwidth	(Note 1)	1	2		MHz
$V_{OUT HI}$		3.8	4.0		V
$V_{OUT LO}$			0.7	1.1	V
Reference Input Voltage	$COMP = E_{AIN}$	2.45	2.50	2.55	V
■ Current Sense Amplifier					
Gain	$V_{Sense+} = 1.4\text{V}$, $V_{Sense-} = 1\text{V}$	4.35	5.00	5.65	V/V
Maximum Differential Input Signal	$V_{Sense+} = V_{Sense-} = 1\text{V}$		0.50		V
Internal Offset Voltage			1.5		V
PSRR			70		dB
Input Bias Current			-40	-65	μA
Com-Mode Voltage Range		-0.25		$V_{CC}-5.00$	V
CMRR			60		dB
■ Hysteresis Level					
Hysteresis Level	$V_{\Delta I} = 0.25\text{V}$ (Note 2)		50		mV
Hysteresis Voltage Dynamic Range					
$V_{\Delta I HI}$			5		V
$V_{\Delta I LO}$			0		V

Note: 1. Although guaranteed, these parameters are not 100% tested in production.


2. $V_{\Delta Sense} = 0.2V_{\Delta I}$ measured across I_{S+} and I_{S-} .

Package Pin Description

CS-322/324 SERIES


PACKAGE PIN #	PIN SYMBOL	FUNCTION
8L PDIP & 8L SO		
1	COMP	Output of Error Amplifier.
2	EA _{IN}	Inverting input of Error Amplifier.
3	IS ⁺	Non-inverting input of Current Sense Amplifier.
4	IS ⁻	Inverting input of Current Sense Amplifier.
5	Gnd	Ground.
6	V _{OUT}	Output driver.
7	V _{CC}	Positive power supply input
8	ΔI	Input voltage that determines the width of the Hysteretic Band.

Test Circuit

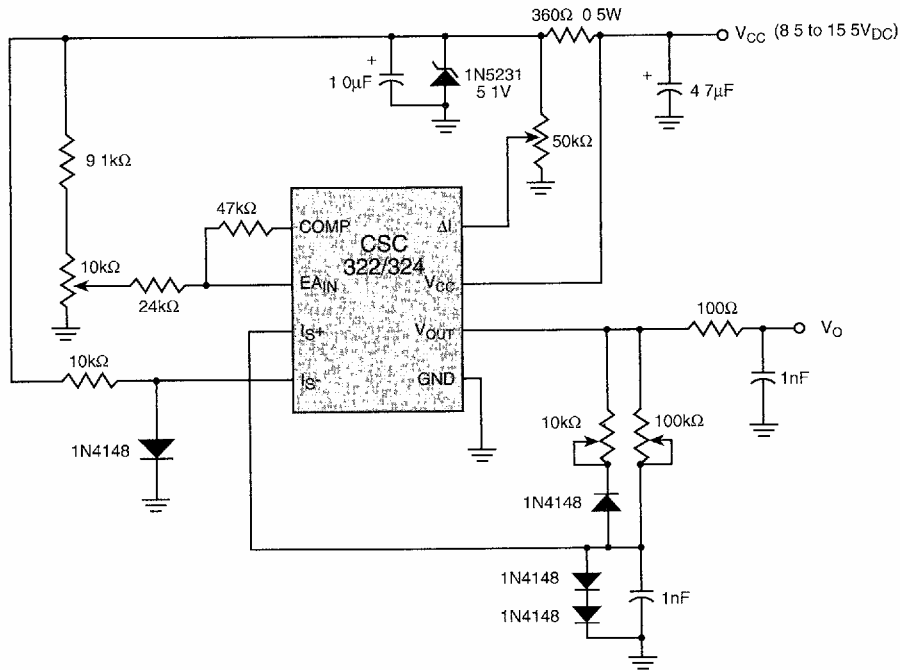

V_{HYS} vs V_{ΔI}

$$\left(V_{HYS} = \frac{(V_{COMP} - 1.5V)}{CSA \text{ Gain}} \right)$$

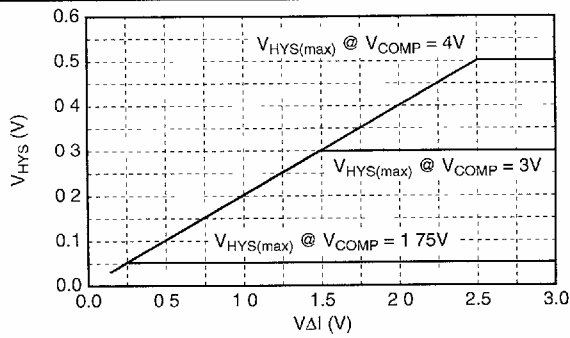



Package Specification

PACKAGE DIMENSIONS IN mm (INCHES)

Lead Count	D			
	Metric		English	
	Max	Min	Max	Min
8L PDIP	9.40	9.14	.370	.360
8L SO	5.00	4.80	.197	.188

PACKAGE THERMAL DATA

Thermal Data		8 L PDIP	8L SO	
$R\theta_{JC}$	typ	52	45	$^{\circ}C/W$
$R\theta_{JA}$	typ	100	165	$^{\circ}C/W$

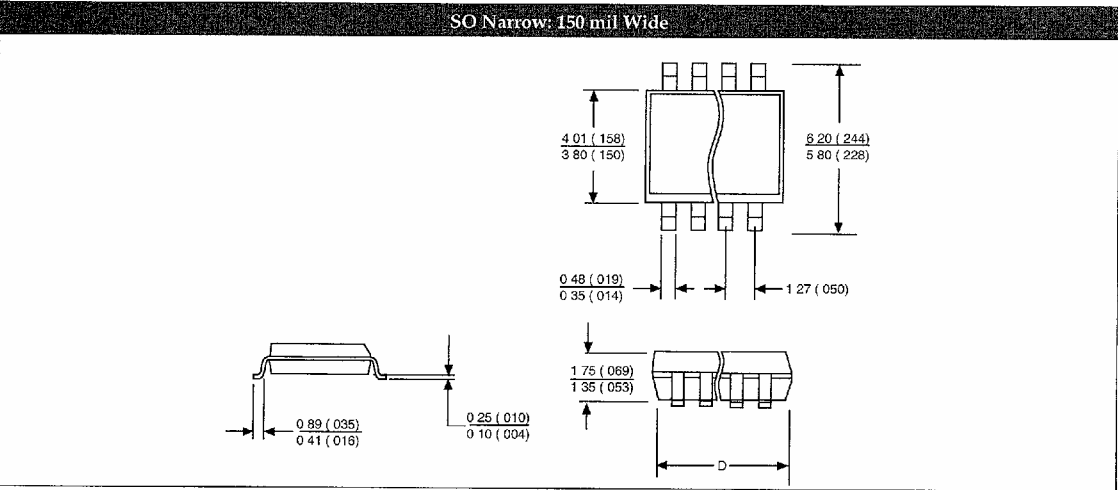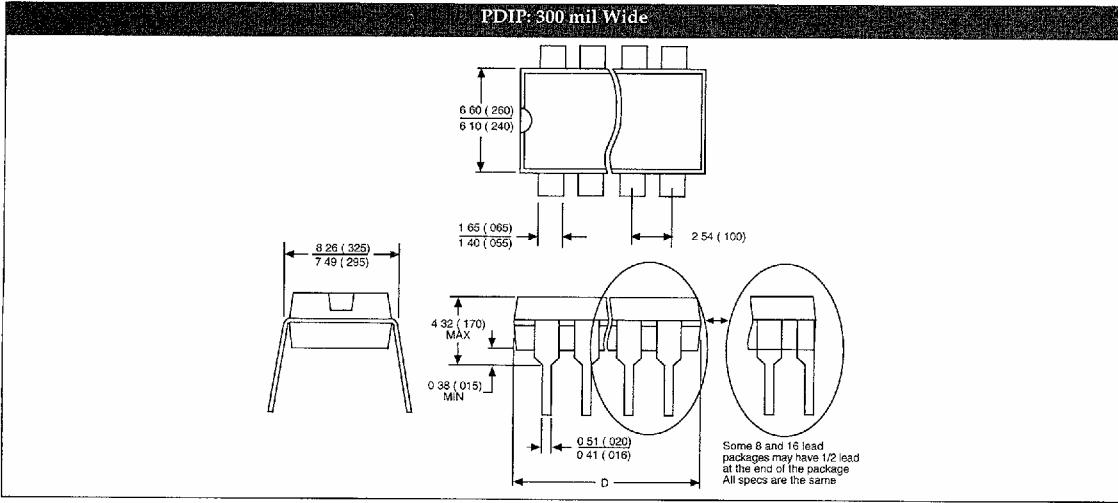

Ordering Information

Part Number	0°C to 70°C	-25°C to 85°C	Description
CS-322CN8	•		8L PDIP
CS-322CD8	•		8L SO
CS-324CN8	•		8L PDIP
CS-324CD8	•		8L SO
CS-322IN8		•	8L PDIP
CS-324IN8		•	8L PDIP

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.