


PURE GREEN
PURE GREEN
SOFT ORANGE
SOFT ORANGE

HLMP-D600
HLMP-D640
HLMP-D400
HLMP-D401


TINTED
CLEAR
TINTED
TINTED

PACKAGE DIMENSIONS

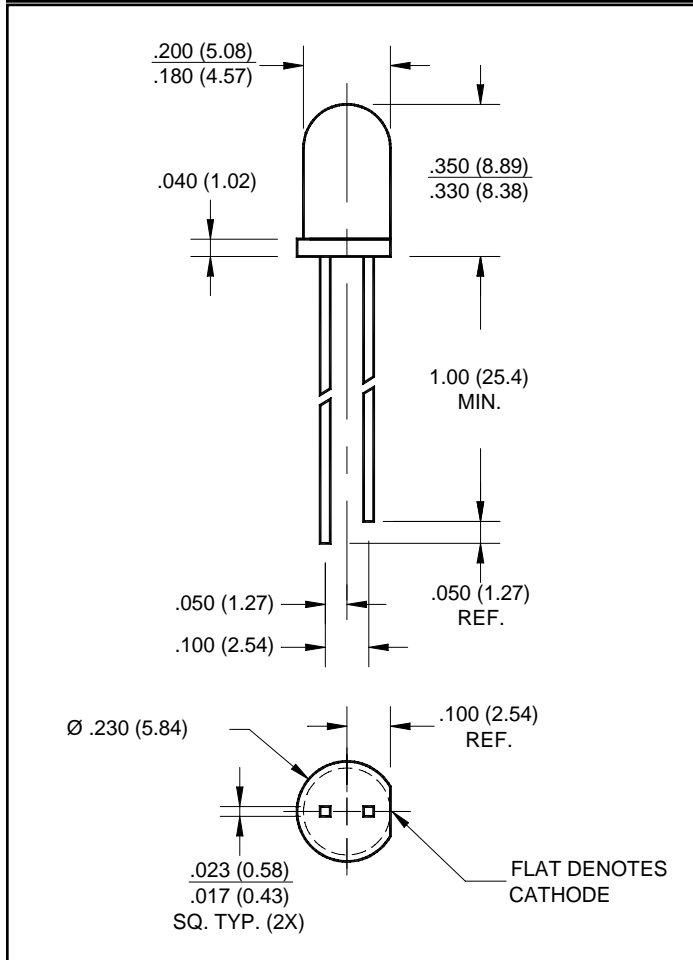

FEATURES

- Popular T-1 3/4 package
- Low drive current
- Solid state reliability
- Wide viewing angle
- Choice of pure green or soft orange colors



DESCRIPTION

These T-1 3/4 LEDs are widely used as general purpose indicators. The pure green lamps is made with a GaP LED on a GaP substrate. The soft orange is made with a GaAsP LED on a GaP substrate. They are encapsulated in epoxy packages and are designed to provide superior light output and a wide viewing angle.

NOTES:

1. ALL DIMENSIONS ARE IN INCHES (mm).
2. TOLERANCES ARE $\pm .010$ " INCH UNLESS SPECIFIED.
3. AN EPOXY MENISCUS MAY EXTEND ABOUT .040" (1 mm) DOWN THE LEADS.

ABSOLUTE MAXIMUM RATING (T_A =25°C)

| Parameter | GREEN | ORANGE | UNITS |
|---------------------------------------|-------------|-------------|-------|
| Power Dissipation | 110 | 110 | mW |
| Forward Current | 40 | 40 | mA |
| Peak Forward Current (f=1kHz, DF=10%) | 200 | 200 | mA |
| Lead Soldering Time at 260° C | 5 | 5 | sec |
| Operating Temperature | -40 to +100 | -40 to +100 | °C |
| Storage Temperature | -40 to +100 | -40 to +100 | °C |

| ELECTRICAL / OPTICAL CHARACTERISTICS (T _A =25°C) | | | | | |
|--------------------------------------------------------------------|------------------|-------------------|------------------|------------------|------------------------|
| Part Number | HLMP-D600 | HLMP-D640* | HLMP-D400 | HLMP-D401 | Condition |
| Luminous Intensity (mcd) | | | | | I _F = 10mA |
| Minimum | 1.0 | 6.7 | 2.1 | 4.0 | |
| Typical | 3.0 | 6.0 | 3.5 | 7.0 | |
| Forward Voltage (V) | | | | | I _F = 10mA |
| Maximum | 2.7 | 3.0 | 2.4 | 2.4 | |
| Typical | 2.1 | 2.2 | 1.9 | 1.9 | |
| Peak Wavelength (nm) | 555 | 555 | 612 | 612 | I _F = 10mA |
| Spectral Line Half Width (nm) | 24 | 24 | 40 | 40 | I _F = 10mA |
| Reverse Voltage (V) | 5 | 5 | 5 | 5 | I _R = 100μA |
| Viewing Angle (°) | 60 | 24 | 60 | 60 | I _F = 10mA |

* HLMP-D640 test condition is I_F = 20mA

TYPICAL PERFORMANCE CURVES ($T_A = 25^\circ\text{C}$)

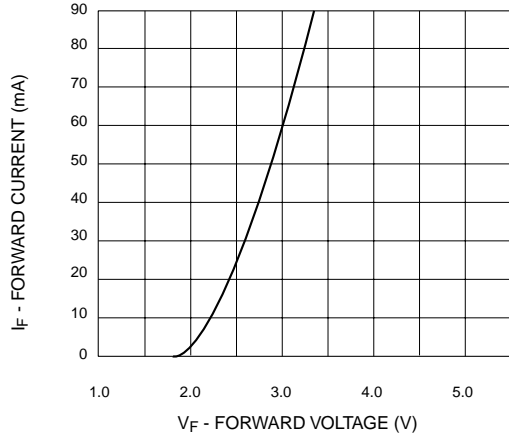


Fig. 1 Forward Current vs. Forward Voltage

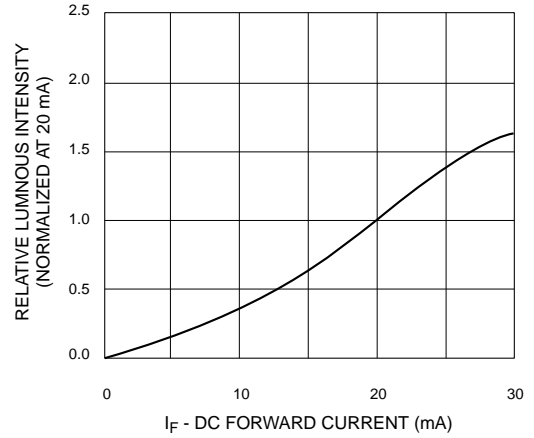


Fig. 2 Relative Luminous Intensity vs. DC Forward Current

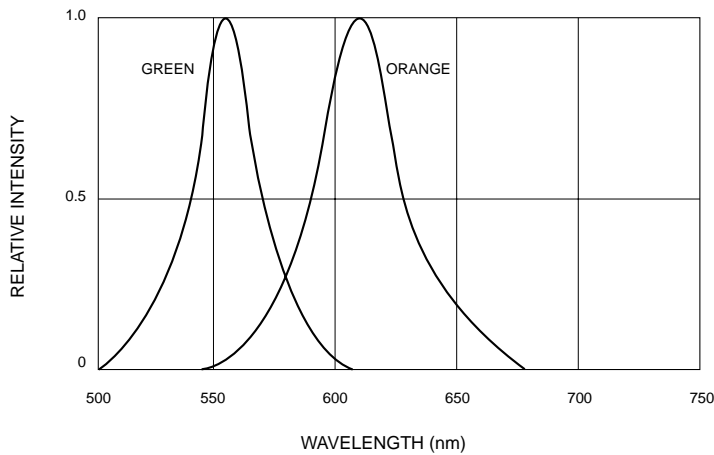


Fig. 3 Relative Intensity vs. Peak Wavelength

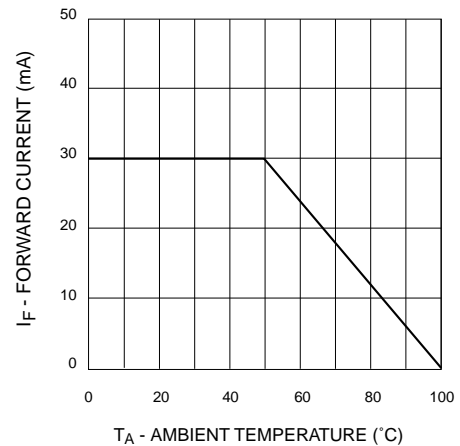
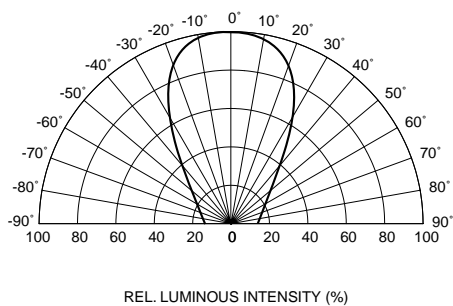
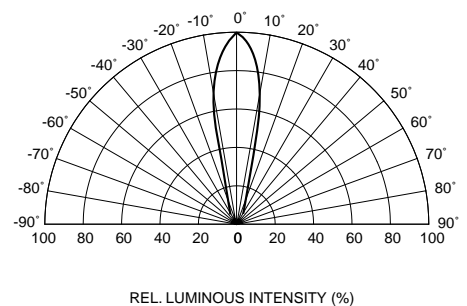


Fig. 4 Current Derating Curve



**Fig. 5A Radiation Diagram
(HLMP-D600, HLMP-D400, HLMP-D401)**



**Fig. 5B Radiation Diagram
(HLMP-D640)**

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.