


**NPN Transistors for Switching Applications**

**BSY 17  
BSY 18  
BSY 62  
BSY 63**

SIEMENS AKTIENGESELLSCHAFT

BSY 17, BSY 18, BSY 62, and BSY 63 are double-diffused epitaxial NPN silicon planar RF transistors in TO 18 case (18 A 3 DIN 41876). Their collectors are electrically connected to their cases. Transistor BSY 17 corresponds to type 2 N 743, BSY 18 to 2 N 744, BSY 62, group A, to type 2 N 706 A, and BSY 63 to type 2 N 708. The transistors are especially suitable for high-speed logic gate applications.

Type	Ordering code
BSY 17	Q60218-Y17
BSY 18	Q60218-Y18
BSY 62 A	Q60218-Y62-A
BSY 62 B	Q60218-Y62-B
BSY 63	Q60218-Y63

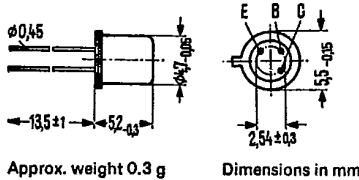

**Maximum ratings**

	BSY 17 BSY 18	BSY 62	BSY 63	
Collector-emitter voltage	$V_{CEO}$ 12	15	15	V
Collector-base voltage	$V_{CBO}$ 20	25	40	V
Emitter-base voltage	$V_{EBO}$ 5	5	5	V
Collector current	$I_C$ 200	200	200	mA
Junction temperature	$T_j$ 200	200	200	°C
Storage temperature range	$T_{stg}$	-65 to +200		°C
Total power dissipation ( $T_{case} = 45^\circ\text{C}$ )	$P_{tot}$ 1	1	1	W

**Thermal resistance**

Junction to ambient air	$R_{thJA}$	≤ 500	≤ 500	≤ 500	K/W
Junction to case	$R_{thJC}$	≤ 150	≤ 150	≤ 150	K/W

**Static characteristics**

	BSY 17			
	$T_{amb}$ 170	25	°C	
Collector cutoff current ( $V_{CBO} = 20\text{ V}$ )	$I_{CBO}$	< 100	< 1*	μA
Collector-emitter breakdown voltage ( $I_{CEO} = 10\text{ mA}$ )	$V_{(BR)CEO}$	-	> 12	V
Emitter-base breakdown voltage ( $I_{EBO} = 10\text{ μA}$ )	$V_{(BR)EBO}$	-	> 5*	V
Collector-base breakdown voltage ( $I_{CBO} = 1\text{ μA}$ )	$V_{(BR)CBO}$	-	> 20	V

\* AQL = 0.66%

— SIEMENS AKTIENGESELLSCHAFT —

**Static characteristics**

Collector cutoff current  
 ( $V_{CB0} = 20\text{ V}$ )  
 Collector-emitter breakdown voltage  
 ( $I_{CEO} = 10\text{ mA}$ )  
 Emitter-base breakdown voltage  
 ( $I_{EBO} = 10\text{ }\mu\text{A}$ )

BSY 18			
$T_{amb}$	170	25	$^{\circ}\text{C}$
$I_{CBO}$	<100	<1*	$\mu\text{A}$
$V_{(BR)CEO}$	-	>12	V
$V_{(BR)EBO}$	-	>5*	V

Collector cutoff current  
 ( $V_{CB0} = 15\text{ V}$ )  
 Collector-emitter breakdown voltage  
 ( $I_{CEO} = 10\text{ mA}$ )  
 Emitter-base breakdown voltage  
 ( $I_{EBO} = 10\text{ }\mu\text{A}$ )  
 Collector-base breakdown voltage  
 ( $I_{CBO} = 1\text{ }\mu\text{A}$ )

BSY 62			
$T_{amb}$	150	25	$^{\circ}\text{C}$
$I_{CBO}$	<30	<0.5*	$\mu\text{A}$
$V_{(BR)CEO}$	-	>15	V
$V_{(BR)EBO}$	-	>5*	V
$V_{(BR)CBO}$	-	>25	V


Collector cutoff current  
 ( $V_{CB0} = 20\text{ V}$ )  
 Collector cutoff current  
 ( $V_{CE} = 20\text{ V}; V_{BE} = 0.25\text{ V};$   
 $T_{amb} = 125^{\circ}\text{C}$ )  
 Collector-emitter breakdown voltage  
 ( $I_{CEO} = 10\text{ mA}$ )  
 Emitter-base breakdown voltage  
 ( $I_{EBO} = 10\text{ }\mu\text{A}$ )  
 Collector-base breakdown voltage  
 ( $I_{CBO} = 1\text{ }\mu\text{A}$ )

BSY 63			
$T_{amb}$	150	25	$^{\circ}\text{C}$
$I_{CBO}$	<15	0.003	$\mu\text{A}$
$I_{CEV}$	<10	( $<0.025$ )*	$\mu\text{A}$
$V_{(BR)CEO}$	-	>15	V
$V_{(BR)EBO}$	-	>5*	V
$V_{(BR)CBO}$	-	>40	V

\* AQL = 0.65%

**Test circuit for turn-on and turn-off time measurements**

Duty cycle <2%

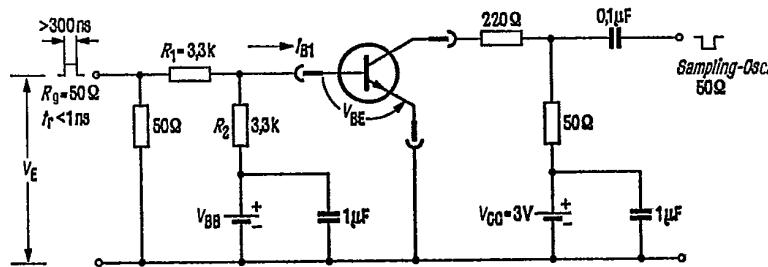

BSY 17  
 BSY 18  
 BSY 62  
 BSY 63

SIEMENS AKTIENGESELLSCHAFT

Static characteristics ( $T_{amb} = 25^\circ\text{C}$ )

BSY 17

$V_{CE}$ V	$I_B$ mA	$I_C$ mA	$h_{FE}$ $I_C/I_B$	$V_{BEsat}^{1)}$ V	$V_{CEsat}^{1)}$ V
0.25	<0.1	1	>10*	0.65	-
0.35	0.167 to 0.5	10	20 to 60*	0.7 (<0.85)	<0.28*
1.0	<10	100	>10*	<1.5	-

BSY 18

$V_{CE}$ V	$I_B$ mA	$I_C$ mA	$h_{FE}$ $I_C/I_B$	$V_{BEsat}^{1)}$ V	$V_{CEsat}^{1)}$ V
0.25	<0.05	1	>20*	0.66	-
0.35	0.083 to 0.25	10	40 to 120*	0.7 (<0.85)	<0.28*
1.0	<5.0	100	>20*	<1.5	-

BSY 62 The transistors are grouped according to the DC current gain  $h_{FE}$  and identified by the code letters "A" or "B".

$h_{FE}$ group	$V_{CE}$ V	$I_B$ mA	$I_C$ mA	$h_{FE}$ $I_C/I_B$
A	1	0.17 to 0.5	10	20 to 60*
B	1	0.033 to 0.33	10	30 to 300*

Saturation voltage ( $I_C = 10\text{ mA}$ ;  $I_B = 10\text{ mA}$ )  $V_{BEsat}^{1)} = <0.9\text{ V}$   
 $V_{CEsat}^{1)} = <0.6^*\text{ V}$


BSY 63

$V_{CE}$ V	$I_B$ mA	$I_C$ mA	$h_{FE}$ $I_C/I_B$
1	<0.033	0.5	>15*
1	0.083 to 0.33	10	30 to 120*

Saturation voltage ( $I_C = 10\text{ mA}$ ;  $I_B = 1\text{ mA}$ )  $V_{BEsat}^{1)} = 0.72 (<0.8)\text{ V}$   
 $V_{CEsat}^{1)} = <0.4^*\text{ V}$

Test circuit for storage time ( $t_s$ )

Duty cycle <2%

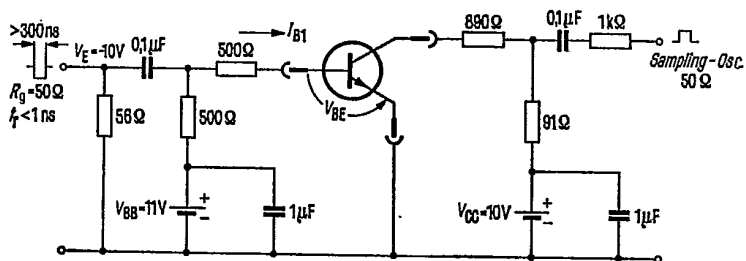

1) The transistor is saturated to such an extent that the DC current gain decreases to  $h_{FE} = 10$ .  
 \* AQL = 0.65%

SIEMENS AKTIENGESELLSCHAFT

**Dynamic characteristics**

( $T_{amb} = 25^\circ\text{C}$ )

Transition frequency

( $I_C = 10\text{ mA}$ ;  $V_{CE} = 10\text{ V}$ ;  
 $f = 100\text{ MHz}$ )

Collector-base capacitance  
( $V_{CBO} = 5\text{ V}$ )

	BSY 17	BSY 18	BSY 62	BSY 63	
$f_T$	>280	>280	>280	>300	MHz
$C_{CBO}$	2.7 (<5)	2.7 (<5)	2.7 (<5)	2.7 (<6)	pF

**Switching times:**

Operating point:

$I_C = 10\text{ mA}$ ;  $I_{B1} = 3\text{ mA}$ ;  
 $-I_{B2} = 1.5\text{ mA}$ ;  $R_L = 270\ \Omega$

$t_{on}$	<16	<16	<40	<40	ns
$t_{off}$	<24	<24	<75	<75	ns

Operating point:

$I_C = 100\text{ mA}$ ;  $I_{B1} = 40\text{ mA}$ ;  
 $-I_{B2} = 20\text{ mA}$ ;  $R_L = 50\ \Omega$


$t_{on}$	7	7	-	-	ns
$t_{off}$	25	25	-	-	ns

$I_C = I_{B1} = -I_{B2} = 10\text{ mA}$ ;  
 $R_L = 1\text{ k}\Omega$

$t_{stg}$	<14	<18	<25	<25	ns
-----------	-----	-----	-----	-----	----


Total perm. power dissipation  
versus temperature  
 $P_{tot} = f(T)$ ;  $R_{th}$  = parameter

BSY 17, BSY 18, BSY 62, BSY 63

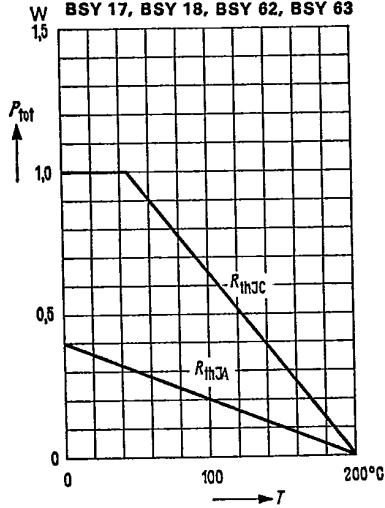


DC current gain  $h_{FE} = f(I_C)$   
 $V_{CE} = 1\text{ V}$ ;  $T_{amb} = \text{parameter}$   
(common emitter configuration)

BSY 18, BSY 62A, BSY 62B

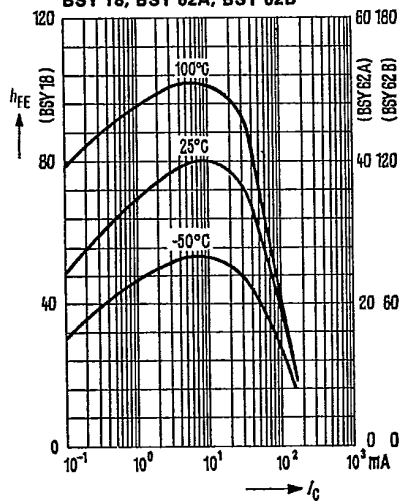


- SIEMENS AKTIENGESELLSCHAFT


Output characteristics  $I_C = f(V_{CE})$   
 $I_B = \text{parameter}$   
 (common emitter configuration)

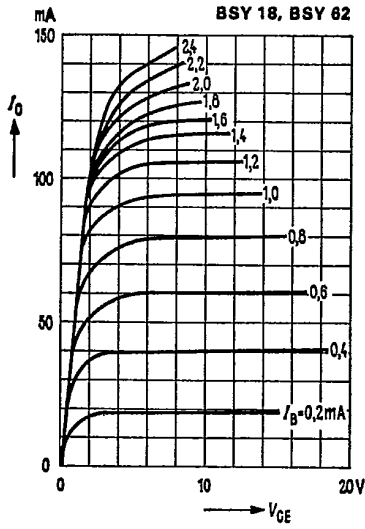


Output characteristics  $I_C = f(V_{CE})$   
 $I_B = \text{parameter}$   
 (common emitter configuration)




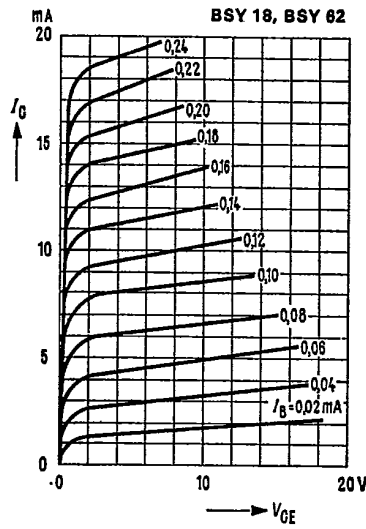


Collector-emitter saturation voltage  
 $V_{CEsat} = f(I_C); h_{FE} = 10$   
 $T_{amb} = \text{parameter}$

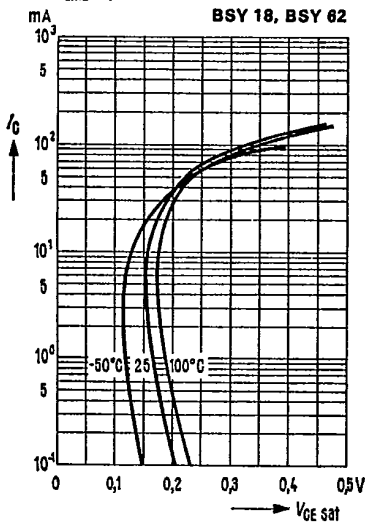


Base-emitter saturation voltage  
 $V_{BEsat} = f(I_C); h_{FE} = 10$   
 $T_{amb} = \text{parameter}$

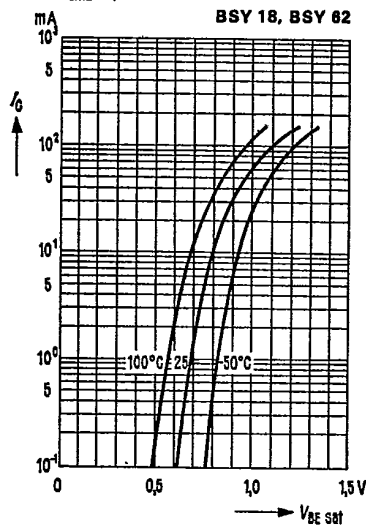


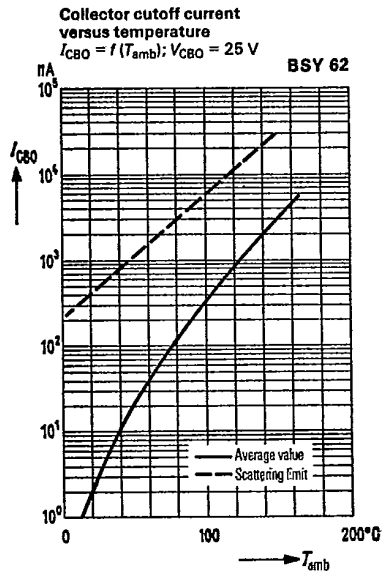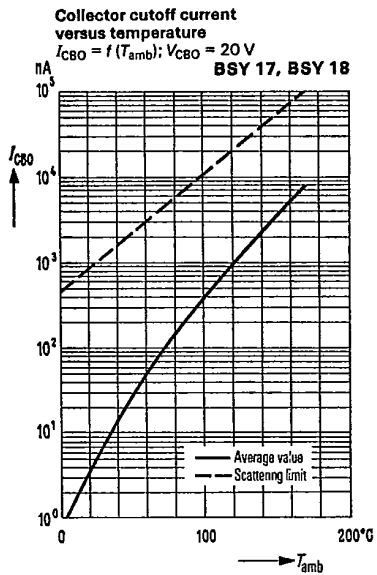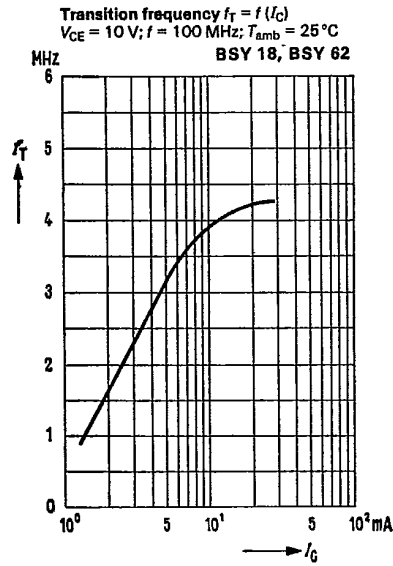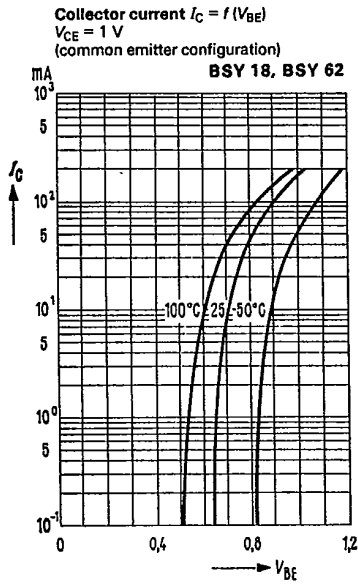


Collector-base capacitance  
 $C_R = f(V_{CB0})$   
 BSY 18, BSY 62

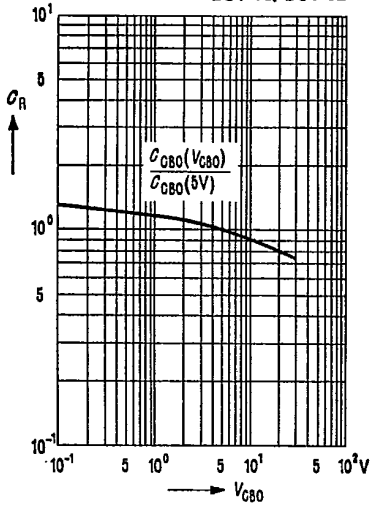


Turn-on time  $t_{on} = f(h_{FE1})$   
 $I_C = 10 \text{ mA}; T_{amb} = 25^\circ\text{C}$   
 $V_{ES} = -3 \text{ V}; \frac{R_2}{R_1} = 1$  BSY 18

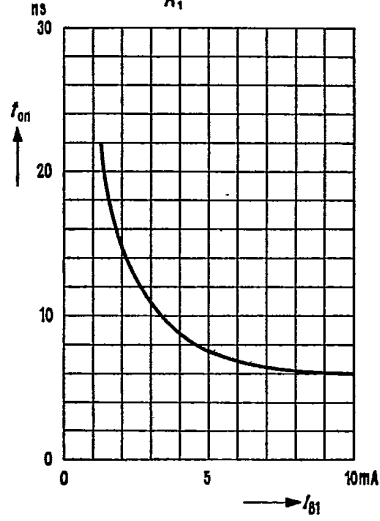

Turn-off time  $t_{off} = f(I_{B1})$   
 $-I_{B2} = \text{parameter}$   
 $I_C = 10 \text{ mA}; T_{amb} = 25^\circ\text{C}$  BSY 18

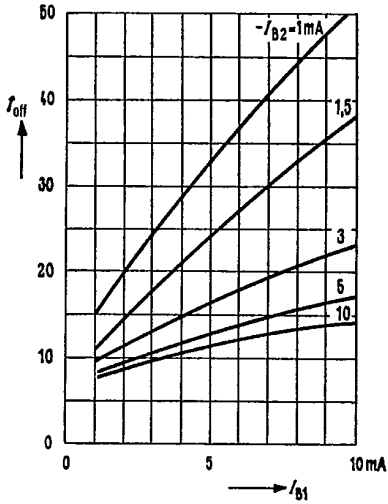

Storage time  $t_s = f(I_{B1})$   
 $-I_{B2} = \text{parameter}$   
 $I_C = 10 \text{ mA}; T_{amb} = 25^\circ\text{C}$  BSY 18

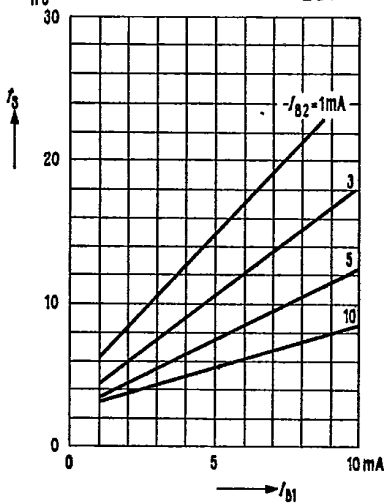



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

**[LittleDiode.com](http://LittleDiode.com)**

Looking forward to providing you with the best possible service.