


MECHANICAL DATA

Dimensions in mm (inches)

PNP SILICON EPITAXIAL TRANSISTOR

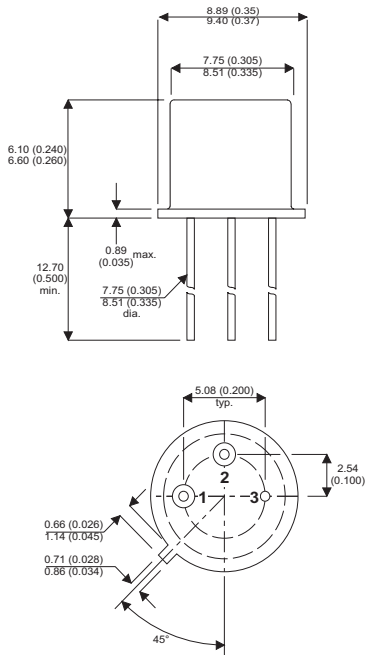

TO39 PACKAGE

APPLICATIONS

- General Purpose Industrial Applications

Pin 1 = Emitter Pin 2 = Base Pin 3 = Collector

ABSOLUTE MAXIMUM RATINGS ($T_{case} = 25^{\circ}C$ unless otherwise stated)

V_{CBO}	Collector – Base Voltage	60V
V_{CEO}	Collector – Emitter Voltage	60V
V_{EBO}	Emitter – Base Voltage	5V
I_C	Collector Current Continuous	600mA
I_{CM}	Collector Current Peak	600mA
I_{EM}	Emitter Current Peak	600mA
P_{tot}	Total Power Dissipation $T_{amb} < 25^{\circ}C$	600 mW
T_{stg}	Storage Temperature	-65 to 200°C
T_j	Operating Junction Temperature	200°C

ELECTRICAL CHARACTERISTICS ($T_j = 25^\circ\text{C}$ unless otherwise stated)

Parameter	Test Conditions	Min.	Typ.	Max.	Unit
I_{EBO} Emitter Cut-off Current	$V_{EB} = 5.0\text{V}$ $I_C = 0$		30	500	nA
	$V_{EB} = 3\text{V}$ $I_C = 0$		1.0	100	
I_{CBO} Collector Cut-off Current	$V_{CB} = 60\text{V}$ $I_E = 0$		1.0	500	nA
	$V_{CB} = 50\text{V}$ $I_E = 0$		0.5	50	
	$T_j = 100^\circ\text{C}$		0.03	2.0	μA
h_{FE} DC Current Gain	$V_{CE} = 10\text{V}$ $I_C = 0.1\text{mA}$	20	90		—
	$V_{CE} = 10\text{V}$ $I_C = 1\text{mA}$		40	105	
	$V_{CE} = 10\text{V}$ $I_C = 10\text{mA}$	50	125		
	$V_{CE} = 10\text{V}$ $I_C = 50\text{mA}$	50	125		
	$V_{CE} = 10\text{V}$ $I_C = 150\text{mA}$	40	90		
$V_{CE(sat)}$ Collector – Emitter Saturation Voltage	$I_C = 150\text{mA}$ $I_B = 15\text{mA}$		0.15	0.40	V
$V_{BE(sat)}$ Base – Emitter Saturation Voltage	$I_C = 30\text{mA}$ $I_B = 1.0\text{mA}$		0.77	0.90	V
	$I_C = 150\text{mA}$ $I_B = 15\text{mA}$		1.05	1.30	
C_{tc} Collector Capacitance	$V_{CB} = 10\text{V}$ $I_E = I_e = 0$ $f = 1.0\text{MHz}$		6	12	pF
C_{te} Emitter Capacitance	$V_{EB} = 2.0\text{V}$ $I_C = I_c = 0$ $f = 1.0\text{MHz}$		18	30	
f_T Transistion Frequency	$V_{CE} = 10\text{V}$ $I_C = 50\text{mA}$ $f = 100\text{MHz}$ $T_{amb} = 25^\circ\text{C}$	100	360		MHz

THERMAL CHARACTERISTICS

$R_{\theta th(j-amb)}$ Thermal Resistance Junction to Ambient			292	$^\circ\text{C/W}$
---	--	--	-----	--------------------



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.