

SIPMOS® Power Transistor



BUZ 111S

Features

- N channel
- Enhancement mode
- Avalanche rated
- dv/dt rated
- 175 °C operating temperature

Product Summary

Drain source voltage	V_{DS}	55	V
Drain-Source on-state resistance	$R_{DS(on)}$	0.008	Ω
Continuous drain current	I_D	80	A



Type	Package	Ordering Code	Packaging
BUZ111S	P-TO220-3-1	Q67040-S4003-A2	Tube
BUZ111S E3045A	P-TO263-3-2	Q67040-S4003-A6	Tape and Reel
BUZ111S E3045	P-TO263-3-2	Q67040-S4003-A5	Tube

Pin 1	Pin 2	Pin 3
G	D	S

Maximum Ratings, at $T_j = 25\text{ °C}$, unless otherwise specified

Parameter	Symbol	Value	Unit
Continuous drain current $T_C = 25\text{ °C}$, ¹⁾ $T_C = 100\text{ °C}$	I_D	80 80	A
Pulsed drain current $T_C = 25\text{ °C}$	I_{Dpulse}	320	
Avalanche energy, single pulse $I_D = 80\text{ A}$, $V_{DD} = 25\text{ V}$, $R_{GS} = 25\ \Omega$	E_{AS}	700	mJ
Avalanche energy, periodic limited by T_{jmax}	E_{AR}	30	
Reverse diode dv/dt $I_S = 80\text{ A}$, $V_{DS} = 40\text{ V}$, $di/dt = 200\text{ A}/\mu\text{s}$, $T_{jmax} = 175\text{ °C}$	dv/dt	6	kV/ μs
Gate source voltage	V_{GS}	± 20	V
Power dissipation $T_C = 25\text{ °C}$	P_{tot}	300	W
Operating and storage temperature	T_j, T_{stg}	-55... +175	°C
IEC climatic category; DIN IEC 68-1		55/175/56	

Thermal Characteristics

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
Characteristics					
Thermal resistance, junction - case	R_{thJC}	-	-	0.5	K/W
Thermal resistance, junction - ambient, leded	R_{thJA}	-	-	62	
SMD version, device on PCB: @ min. footprint @ 6 cm ² cooling area ²⁾	R_{thJA}	-	-	62 40	

Electrical Characteristics, at $T_j = 25\text{ }^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
Static Characteristics					
Drain- source breakdown voltage $V_{GS} = 0\text{ V}$, $I_D = 0.25\text{ mA}$	$V_{(BR)DSS}$	55	-	-	V
Gate threshold voltage, $V_{GS} = V_{DS}$ $I_D = 240\text{ }\mu\text{A}$	$V_{GS(th)}$	2.1	3	4	
Zero gate voltage drain current $V_{DS} = 50\text{ V}$, $V_{GS} = 0\text{ V}$, $T_j = 25\text{ }^\circ\text{C}$ $V_{DS} = 50\text{ V}$, $V_{GS} = 0\text{ V}$, $T_j = 150\text{ }^\circ\text{C}$	I_{DSS}	-	0.1	1 100	μA
Gate-source leakage current $V_{GS} = 20\text{ V}$, $V_{DS} = 0\text{ V}$	I_{GSS}	-	10	100	nA
Drain-Source on-state resistance $V_{GS} = 10\text{ V}$, $I_D = 80\text{ A}$	$R_{DS(on)}$	-	0.0065	0.008	Ω

¹current limited by bond wire

² Device on 40mm*40mm*1.5mm epoxy PCB FR4 with 6 cm² (one layer, 70 μm thick) copper area for drain connection. PCB is vertical without blown air.

Electrical Characteristics, at $T_j = 25\text{ }^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
Dynamic Characteristics					
Transconductance $V_{DS} \geq 2 \cdot I_D \cdot R_{DS(on)max}$, $I_D = 80\text{ A}$	g_{fs}	30	73	-	S
Input capacitance $V_{GS} = 0\text{ V}$, $V_{DS} = 25\text{ V}$, $f = 1\text{ MHz}$	C_{iss}	-	3600	4500	pF
Output capacitance $V_{GS} = 0\text{ V}$, $V_{DS} = 25\text{ V}$, $f = 1\text{ MHz}$	C_{oss}	-	1100	1375	
Reverse transfer capacitance $V_{GS} = 0\text{ V}$, $V_{DS} = 25\text{ V}$, $f = 1\text{ MHz}$	C_{rss}	-	550	690	
Turn-on delay time $V_{DD} = 30\text{ V}$, $V_{GS} = 10\text{ V}$, $I_D = 80\text{ A}$, $R_G = 2.4\text{ }\Omega$	$t_{d(on)}$	-	25	37	ns
Rise time $V_{DD} = 30\text{ V}$, $V_{GS} = 10\text{ V}$, $I_D = 80\text{ A}$, $R_G = 2.4\text{ }\Omega$	t_r	-	30	45	
Turn-off delay time $V_{DD} = 30\text{ V}$, $V_{GS} = 10\text{ V}$, $I_D = 80\text{ A}$, $R_G = 2.4\text{ }\Omega$	$t_{d(off)}$	-	65	95	
Fall time $V_{DD} = 30\text{ V}$, $V_{GS} = 10\text{ V}$, $I_D = 80\text{ A}$, $R_G = 2.4\text{ }\Omega$	t_f	-	40	60	

Electrical Characteristics, at $T_j = 25\text{ }^\circ\text{C}$, unless otherwise specified


Parameter	Symbol	Values			Unit
		min.	typ.	max.	
Dynamic Characteristics					
Gate to source charge $V_{DD} = 40\text{ V}$, $I_D = 80\text{ A}$	Q_{gs}	-	18	27	nC
Gate to drain charge $V_{DD} = 40\text{ V}$, $I_D = 80\text{ A}$	Q_{gd}	-	61	91.5	
Gate charge total $V_{DD} = 40\text{ V}$, $I_D = 80\text{ A}$, $V_{GS} = 0\text{ to }10\text{ V}$	Q_g	-	125	185	
Gate plateau voltage $V_{DD} = 40\text{ V}$, $I_D = 80\text{ A}$	$V_{(plateau)}$	-	5.45	-	V

Reverse Diode

Inverse diode continuous forward current $T_C = 25\text{ }^\circ\text{C}$	I_S	-	-	80	A
Inverse diode direct current, pulsed $T_C = 25\text{ }^\circ\text{C}$	I_{SM}	-	-	320	
Inverse diode forward voltage $V_{GS} = 0\text{ V}$, $I_F = 160\text{ A}$	V_{SD}	-	1.25	1.8	V
Reverse recovery time $V_R = 30\text{ V}$, $I_F = I_S$, $di_F/dt = 100\text{ A}/\mu\text{s}$	t_{rr}	-	105	160	ns
Reverse recovery charge $V_R = 30\text{ V}$, $I_F = I_S$, $di_F/dt = 100\text{ A}/\mu\text{s}$	Q_{rr}	-	0.29	0.45	μC

Power Dissipation


$P_{tot} = f(T_C)$

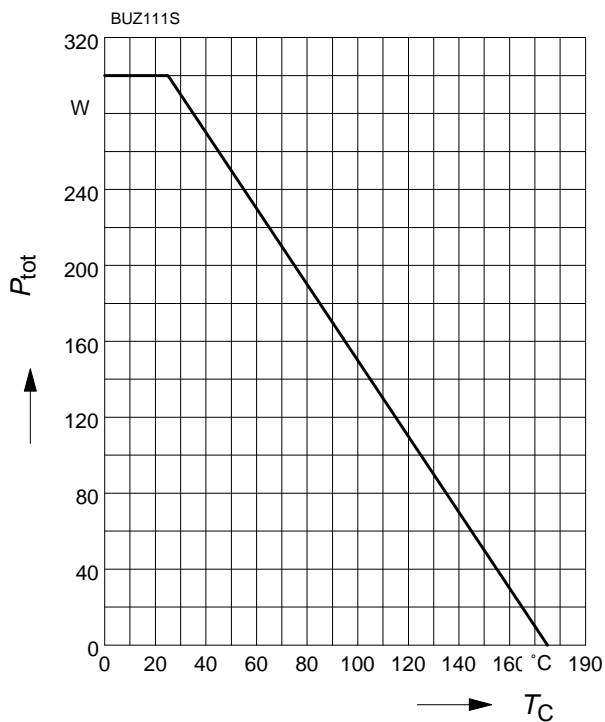

Drain current

$I_D = f(T_C)$


parameter: $V_{GS} \geq 10\text{ V}$

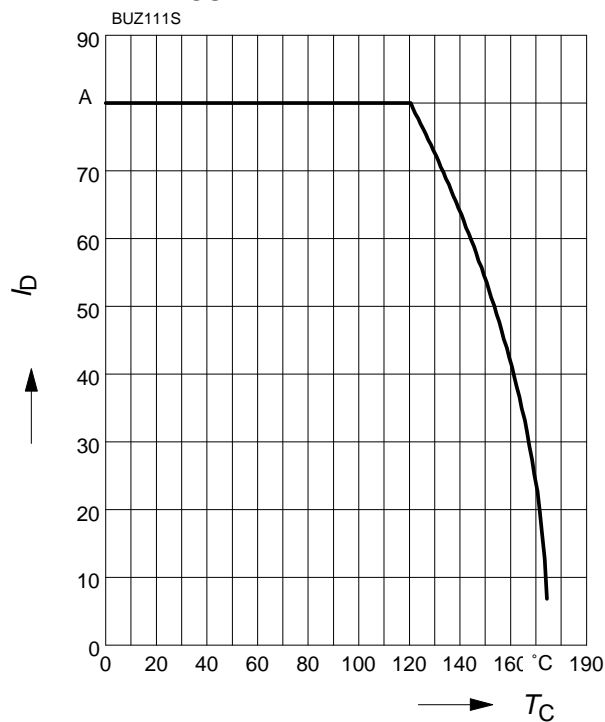

Safe operating area

$I_D = f(V_{DS})$


parameter : $D = 0, T_C = 25\text{ °C}$

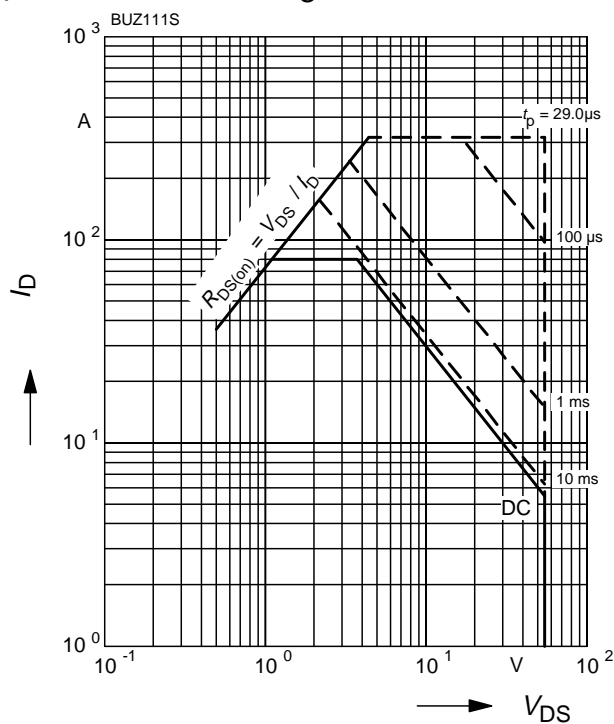

Transient thermal impedance


$Z_{thJC} = f(t_p)$

parameter : $D = t_p/T$

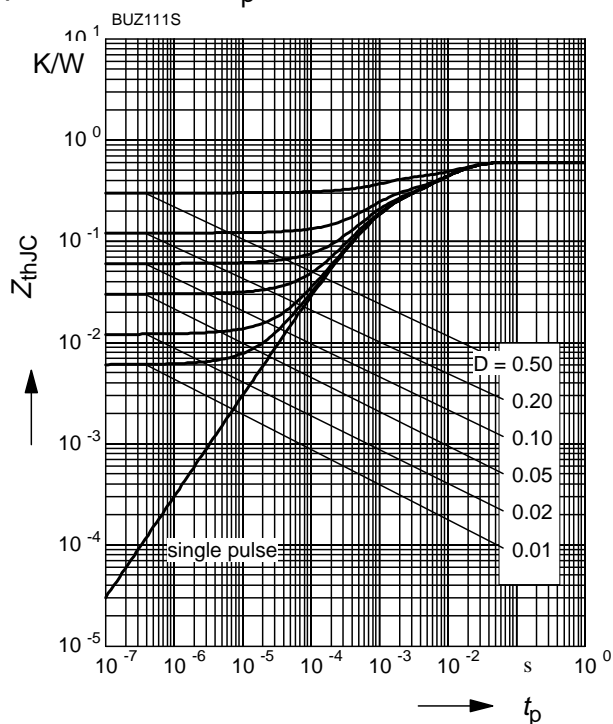


Typ. output characteristics

$I_D = f(V_{DS})$
parameter: $t_p = 80 \mu s$

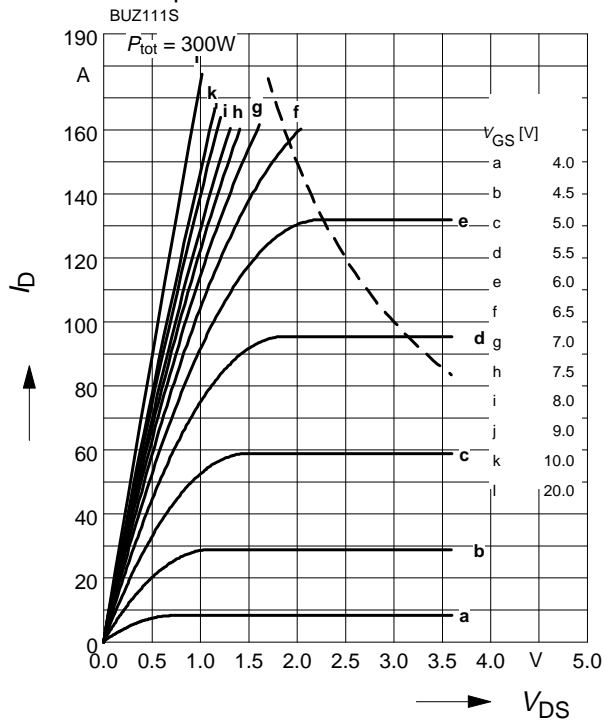


Typ. drain-source-on-resistance

$R_{DS(on)} = f(I_D)$
parameter: V_{GS}

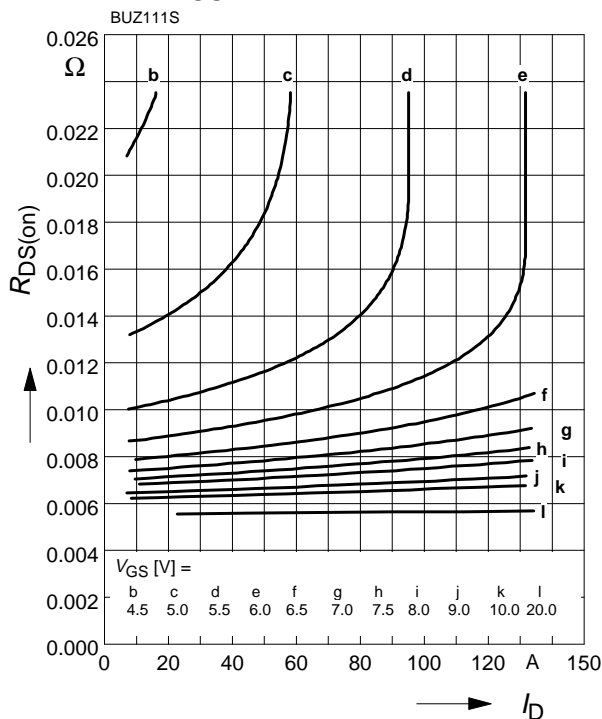


Typ. transfer characteristics $I_D = f(V_{GS})$

parameter: $t_p = 80 \mu s$
 $V_{DS} \geq 2 \times I_D \times R_{DS(on)} \max$

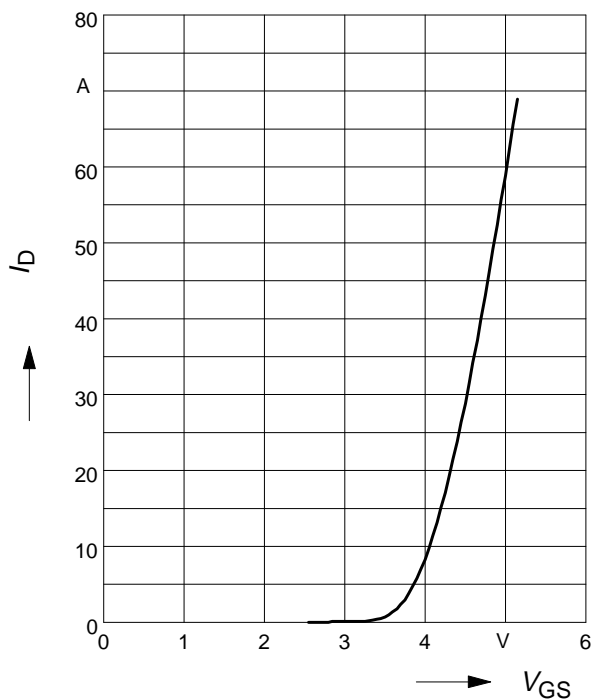

Typ. forward transconductance


$g_{fs} = f(I_D); T_j = 25^\circ C$
parameter: g_{fs}

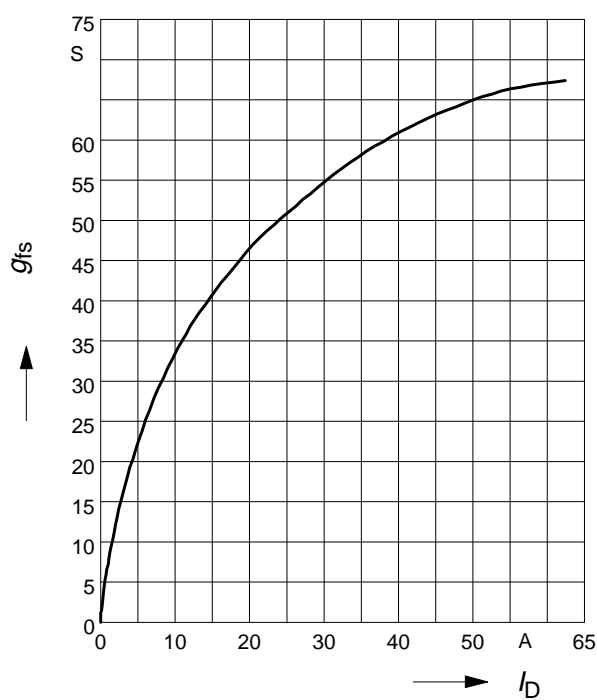

Drain-source on-resistance

$$R_{DS(on)} = f(T_j)$$


parameter : $I_D = 80 \text{ A}$, $V_{GS} = 10 \text{ V}$

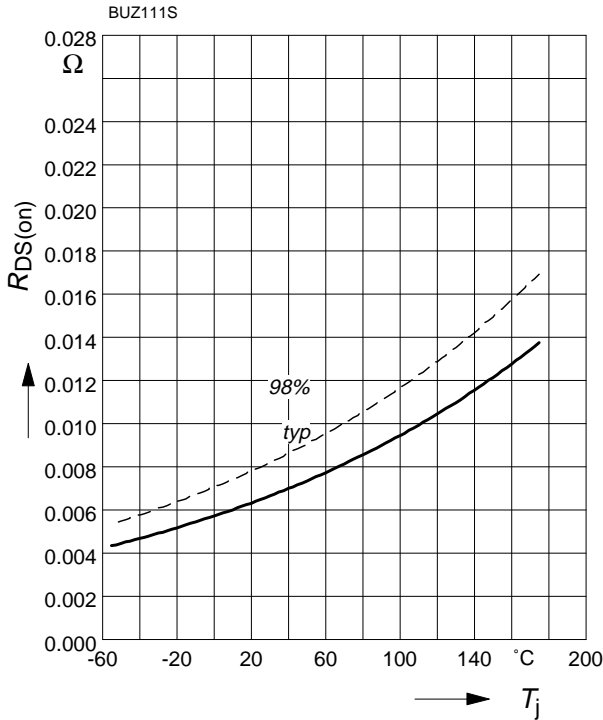

Gate threshold voltage

$$V_{GS(th)} = f(T_j)$$


parameter : $V_{GS} = V_{DS}$, $I_D = 240 \mu\text{A}$

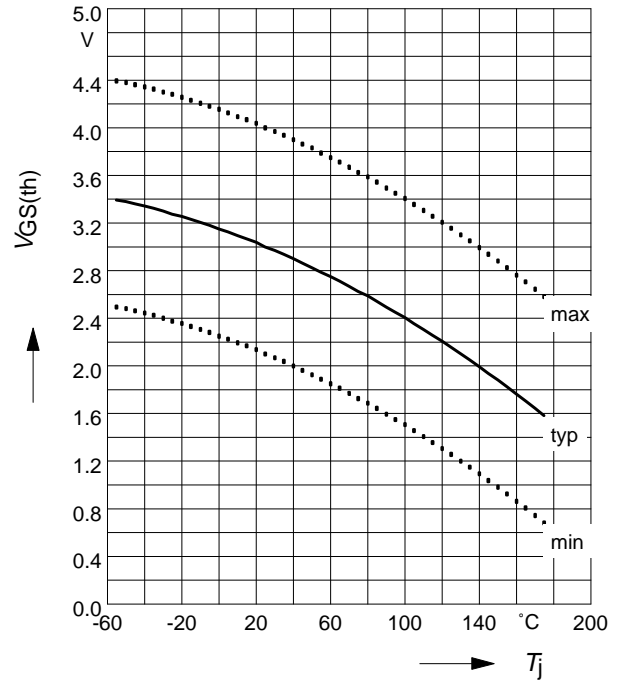

Typ. capacitances

$$C = f(V_{DS})$$


parameter: $V_{GS} = 0 \text{ V}$, $f = 1 \text{ MHz}$

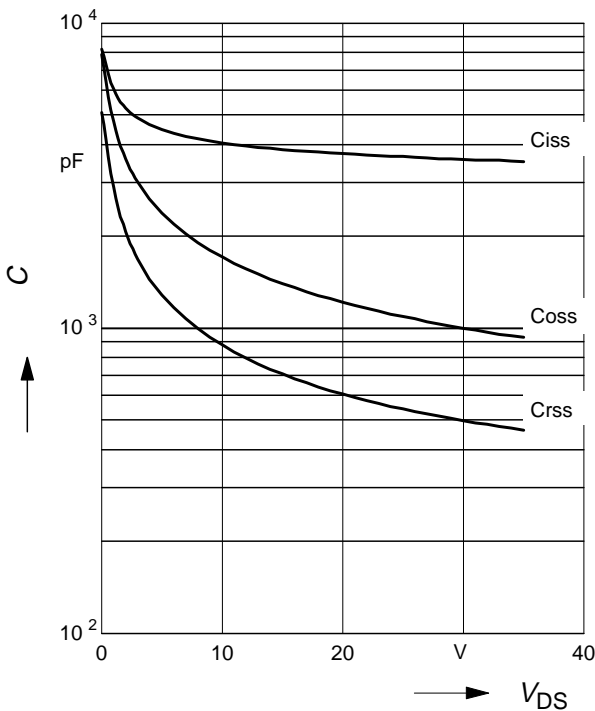

Forward characteristics of reverse diode

$$I_F = f(V_{SD})$$


parameter: T_j , $t_p = 80 \mu\text{s}$

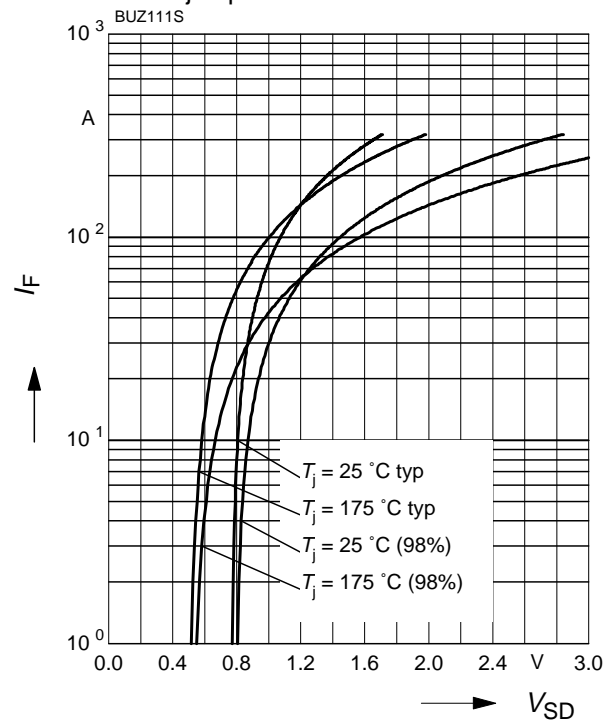

Avalanche Energy $E_{AS} = f(T_j)$

parameter: $I_D = 80\text{ A}$, $V_{DD} = 25\text{ V}$


$R_{GS} = 25\ \Omega$

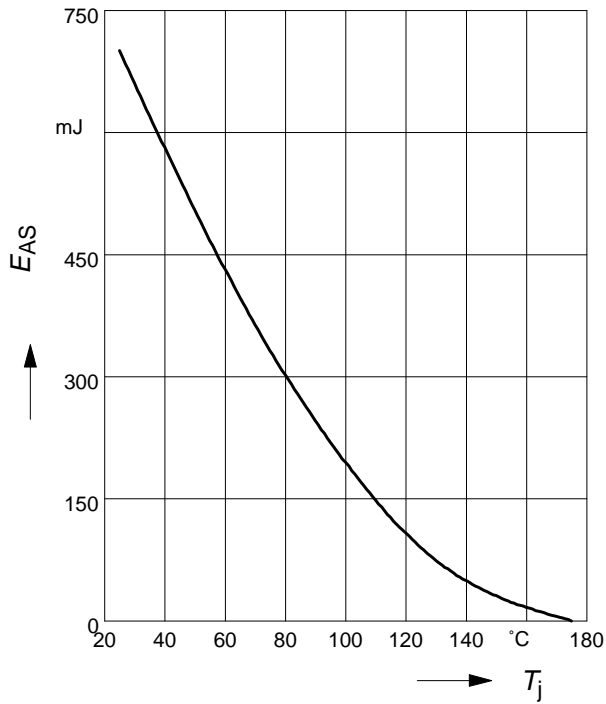

Typ. gate charge $V_{GS} = f(Q_{Gate})$


parameter: $I_{D\ puls} = 80\text{ A}$

parameter: $I_{D\ puls} = 80\text{ A}$

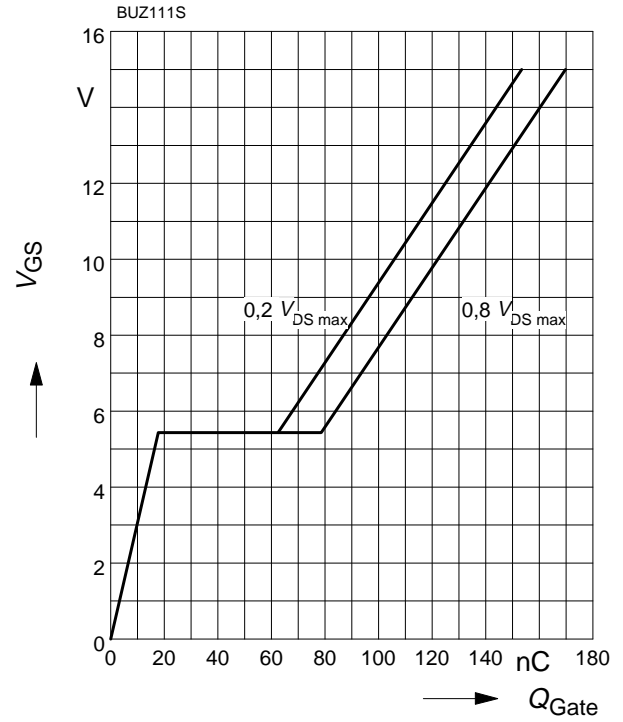

Drain-source breakdown voltage $V_{(BR)DSS} = f(T_j)$

$V_{(BR)DSS} = f(T_j)$

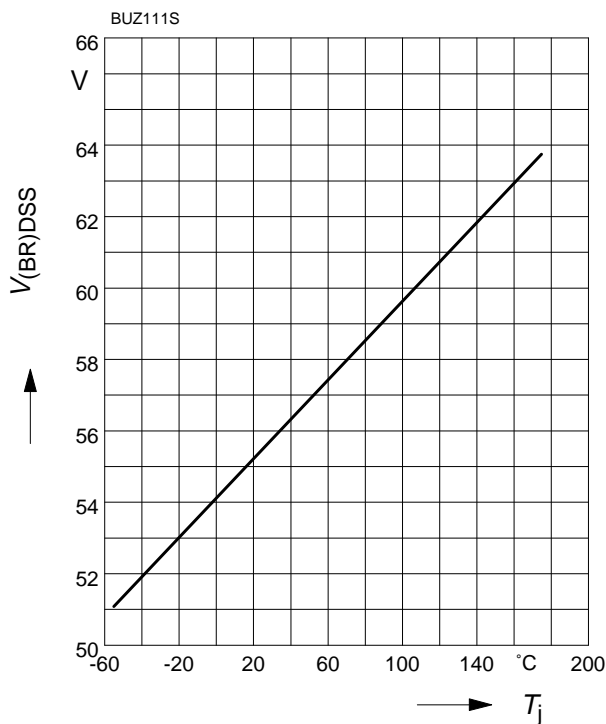



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.